

Urban Planning Permits Guideline

We help ensure that your application is clearly organized and set out for the correct permit.

Copyright © 2026

No part of the Urban Planning Permits Guideline (UPPG) shall be copied, printed, sold or reproduced in any format, in part or in whole.

Maintenance

The Urban Planning Permits Guideline (UPPG) is an interactive document that will be available electronically from the Dubai Municipality website.

Updates and addendums will be issued on a needs basis to reflect improvements to requirements, standards and technology.

It is recommended that applicants check back regularly to ensure that they are following the latest version of the Urban Planning Permits Guideline (UPPG).

Editions

This is the first edition of the Urban Planning Permits Guideline (UPPG).

Any amended content in future editions will be indicated clearly.

What worked for the past may not work for the future.
What benefitted us in the past 20 years may be not be useful for the next 20.
Time makes it an imperative to change tools, renew institutions and tackle recessions.
In the same way, the future compels us to have new blood, restructure our culture and ideas to ensure that we achieve real changes over the coming period.

His Highness Sheikh Mohammed Bin Rashid Al Maktoum
Vice President and Prime Minister of the UAE and Ruler of Dubai
January 4, 2020, the 14th anniversary of his accession as Ruler of Dubai

Urban Planning Permits Guideline

Table of contents

A. Introducing the Urban Planning Permits Guideline

1. Purpose of the Guideline
 - i. Using the Guideline
2. Dubai's urban planning and development system
 - i. The competent authority and associated responsibilities
 - ii. Jurisdictions
 - iii. Types of Permits within the system
 - Urban planning permits
 - iv. Urban planning permits
 - Scope and application of the Urban planning permits
 - Deciding on the right urban planning permit
3. Using the Unified Urban Planning application system
 - i. Application portal
 - ii. General submission requirements

B. Permit processes and requirements

1. Dubai 2040 Alignment
 - i. When is this used?
 - ii. Submission channels
 - iii. Process flowchart
 - iv. Making a good application
2. Master Plan Permit
 - i. When is this used?
 - ii. Process flowchart
 - iii. Submission checklist
 - iv. Making a good application
3. Planning Permit
 - i. When is this used?
 - ii. Process flowchart
 - iii. Submission checklist
 - iv. Making a good application
4. General Planning Permit
 - i. When is this used?
 - ii. Process flowchart
 - iii. Submission checklist
 - iv. Making a good application

C. Appendices

1. Definitions
2. Abbreviations
 - i. Policy related
 - ii. Authority names
 - iii. Other terms
3. Approval requirements by authorities
4. Key urban planning overlays and manuals
5. Land use code
 - i. Land use classification
 - ii. Land use and zoning matrix
6. Urban planning standards
 - i. Calculation rules
 - ii. Villa requirements
 - iii. Population assumptions
 - iv. Public facilities table
7. Submission requirements
 - i. Report
 - ii. Comprehensive master plan drawing and database in GIS
 - iii. Comprehensive master plan database in MS Excel

A.

Introduction Urban Planning Permits Guideline


This chapter introduces Dubai's urban planning and development system along with its necessary components

A. Introduction Urban Planning Permits Guideline

1. Purpose of the Guideline

Using the Guideline

1. The Urban Planning Permits Guideline unifies the urban planning permits submission approach within the Emirate of Dubai.
2. It overrides any guidelines set by individual planning authorities of the master plan development.
3. The guideline is easy to use and, when combined with the relevant standards, should help make the review and approval process go smoothly.

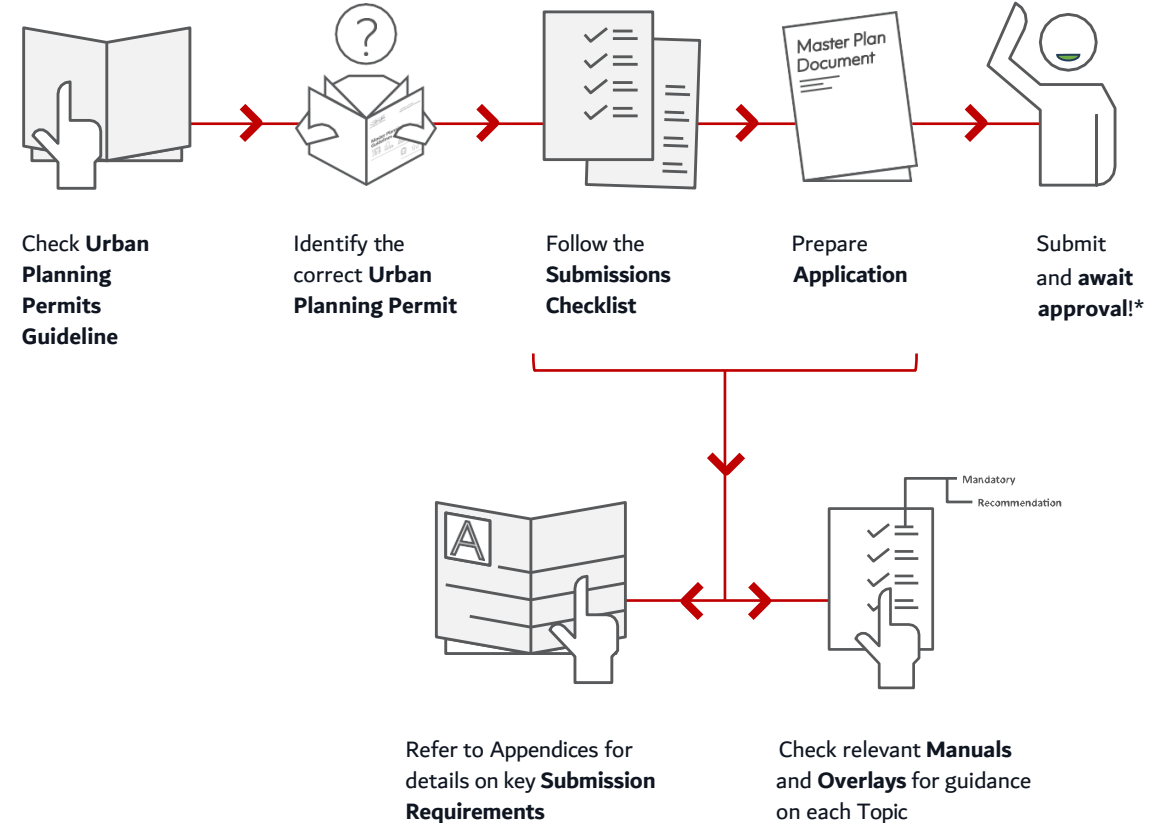

* Review urban planning permit application flowcharts for steps on each individual application

A. Introduction Urban Planning Permits Guideline

2. Dubai's urban planning and development system

The competent authority and associated responsibilities

1. The Dubai Municipality (DM) is the Emirate's competent planning authority pursuant to **Law 16 of 2023** and its amendments under **Law No. 8 of 2026** regarding Urban Planning in the Dubai Emirate.
2. DM's Urban Planning and Quality of Life Department is responsible for establishing all the statutory policies and requirements that must be followed by all stakeholders in the field of urban planning.
3. Dubai Municipality will review the initial compliance with Dubai 2040 Plan of all submissions.
4. Dubai Municipality will review conformity with Public facilities provision standards across all jurisdiction for Master Plan Permit and Planning Permit
5. DM has the right to request any additional requirements or applying any guidelines In coordination with planning authority subject to chapter No. (18) in Urban planning law.
6. Each planning authority is responsible for approving the master plans for the lands under its jurisdiction
7. Any deviations from the agreed master plan approach by the developer will be reported to the Dubai Municipality by the respective Planning authority.
8. It is mandatory for all the Emirate's developers to abide by the decisions of the Dubai Municipality or other planning authorities.




A. Introduction Urban Planning Permits Guideline

2. Dubai's urban planning and development system

Jurisdiction

1. All new master plans and master plan modifications will be reviewed and approved by the relevant planning authority to ensure compliance with the regulations, policies and initiatives of the Emirate.
 - a. Dubai Municipality
 - b. Dubai Development Authority
 - c. Trakhees
 - d. Dubai South
 - e. Dubai Integrated Economic Zones Authority
2. DM will remain responsible for:
 - a. Alignment with Dubai Structure Plan 2040
 - b. Conformity with Public facilities provision standards
 - c. General Planning Permit across all jurisdictions

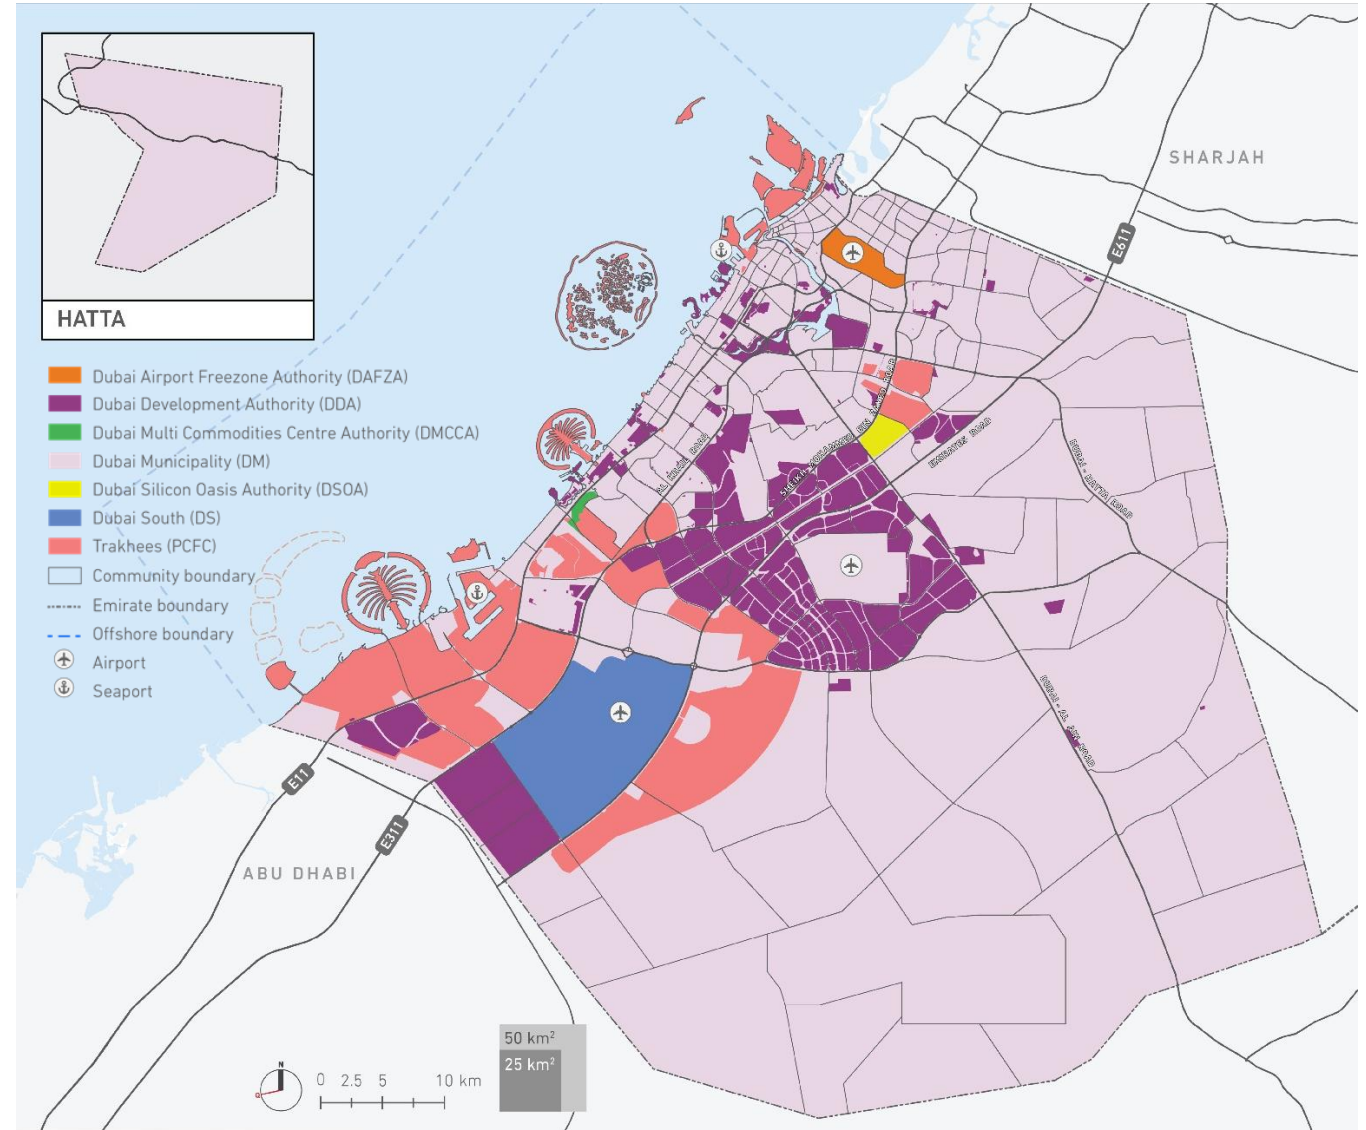

A. Introduction Urban Planning Permits Guideline

2. Dubai's urban planning and development system

Types of Permits within Dubai's urban planning and development system for real estate developments

Urban planning permits

Master plan > Planning > General

Focus of the Guideline


All planning and development projects must be in line with the approved Structure plan, framework plan, policies, manuals or master plan as is the case.

Refer to Appendix 4 to have an overview of the current Overlays and Manuals that will be used to assess the application.

A. Introduction Urban Planning Permits Guideline

2. Purpose of the Guideline

Deciding on the right urban planning permit **

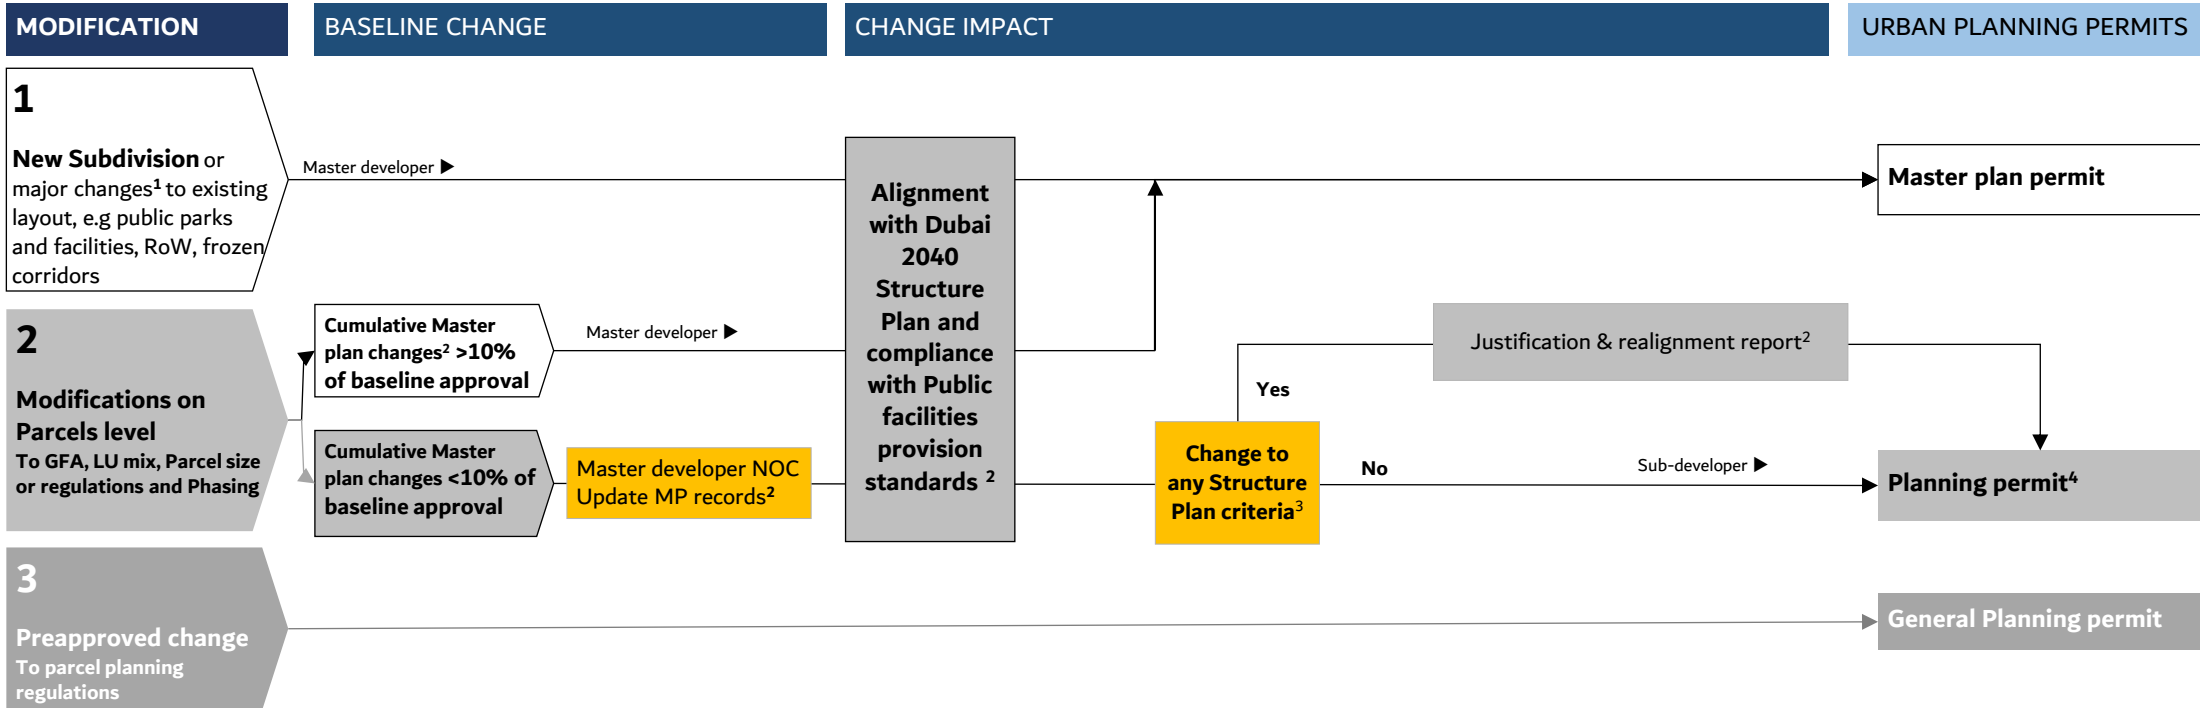

- Notes:**
1. Refer to modification criteria Page No. ().
 2. To be Prepared by the Master developer.
 3. Structure Plan criteria currently includes: residential and employment population density, public recreational space provision, affordable housing, and TOD design.
 4. The Planning Permit will on hold until the:
 - i. the master plan permit is re-validated.
 - ii. the Structure Plan Alignment report is approved.
- In both cases it is the Master developer's responsibility to initiate the update before the Cumulate change % or ensure that the Structure Plan criteria are maintain in the project before issuing the NOC to the sub developer.

**** An Automated engine will be included in unified urban planning portal that can guide the applicant to the right urban planning permit.**

A. Introduction Urban Planning Permits Guideline

2. Purpose of the Guideline

Urban Planning Permits

Scope and application

1. The Urban Planning Permits Guideline (UPPG) will apply to all developer real estate projects.
2. A master plan must be created for all new development.
3. This document should serve as the comprehensive guide for the long-term physical development of the site/ project.
4. It must cover plans for land use, public facilities, open space, urban design, mobility and utilities.
5. The submission checklists should be treated as the minimum requirement. In the case of complex master plans¹, additional information not included in the standard list may be requested to review and approve the application. This will be determined on a case basis considering its location, scale of development etc.
6. We encourage the developers and their consultants to approach us in case of any clarification or recommendations to the guidelines.
7. Urban Planning Permits overview
 - a. **Master plan permit (MPP)**
 **Used for:** New master plans or major modifications (including regeneration).
 - b. **Planning permit (PP)**
 **Used for:** Minor master plan modifications that do not require any extensive study as they fall within the allowable thresholds of change for a master plan.
 - c. **General planning permit (GPP)**
 **Used for:** Pre-approved master plan or parcel modifications.
8. Once an Urban Planning Permit has been achieved the applicant may proceed to apply for either a:
 - a. **Building permit, or**
 - b. **E-NOC for detailed engineering or construction**

1. Such master plans include but are not limited to those within the influence of heritage district, with marine elements, within Urban and Multi-sector centers, and brownfield regeneration.

A. Introduction Urban Planning Permits Guideline

3. Using the Unified application system

Application portal (customer journey and channels)

1. Use the Urban planning portal to:
 - a. Lodge and submit all applications.
 - b. Fees payment if any.
 - c. Track progress, receive updates and correspond on an ongoing application.
2. Available channels for application:
 - i. **Unified Urban Planning Portal**
3. Who can submit a master plan?
 - a. **Owner or developer:** Legal landowner who can develop the land directly or through someone else, an authorized developer.
 - b. **Consultant:** Appointed Consultant to execute the work on behalf of the owner
 - c. **Planning Authority:** After submitting the Dubai 2040 alignment request by the Consultant/ Developer the Planning Authority will be responsible for submitting the request to Dubai Municipality

General submission requirements

1. Master plan Report
 - a. See Appendix 7 for details
2. Master plan in Geographic Information Systems format
 - a. See Appendix 7 for details
3. Project development budget, including zoning, population and infrastructure requirements in Microsoft Excel
 - a. See Appendix 6 for details
4. Dimensions, units and calculations
 - a. All quantities shall be in metric units with the units defined.
 - b. All engineering shall be performed in dynamically consistent units.
5. Calculations and rounding
 - a. Where the required number is determined by calculations of ratios or percentages, and it results in remainders or fractions, the following rules apply:

i. Land areas	Exact
ii. Gross floor area	Exact
iii. Population	Rounded down
iv. Public facilities	Rounded down
v. Parking	Rounded down

B.

Permit processes and requirements

This chapter outlines each permit process and the submission requirements to secure approval.

B. Permit processes and requirements

1. Alignment with Dubai 2040 Structure Plan and compliance with Public facilities provision standards



When is this used?

Alignment with Dubai 2040 plan and conformity with Public facilities provision standards are a mandatory stage in Master Plan approval process which is reviewed by DM in the following cases:

1. New Subdivision of unzoned land and the determination of its use.
2. Submitting for major modifications¹ which exceeds 10% of an approved Master Plan.
3. Submitting for modifications that affect previously approved parameters of Dubai 2040 plan.

Structure Plan Reviewing Criteria


1. **Land Use**
 - To be aligned with proposed LU by 2040 plan.
2. **Target Densities**
 - Achieve target densities (residential – employment).
3. **Public recreational Open spaces**
 - Provide (5%) of total project area as public open space.
4. **Affordable housing. (optional)**
 - Provide % of residential GFA for Affordable housing.
5. **TOD requirements.**
 - Align with TOD requirements. (Refer to TOD manual)
6. **Urban Centers Requirements.**
 - Any future regulations requested from Urban Centers framework plan.
7. **Public Facilities.²**
 - DM to review and approve public facilities provision within alignment process.

Notes:

1. Refer to modification criteria Page No. (19).
2. As per law (8) 2026 of urban planning in Dubai Emirate.

B. Permit processes and requirements

1. Alignment with Dubai 2040 Structure Plan and compliance with Public facilities provision standards



Available channels to get Dubai 2040 Parameters

A. Dubai Here platform:

- Only Master Developer or planning authority can get access to Dubai 2040 application.

B. Unified urban planning portal (Request for Dubai 2040 alignment service):

- Authorized Consultants, Developers or planning authority can receive Dubai 2040 parameters from DM Team through the portal.

C. Through E-mail to DM Team.



Available channels for submitting alignment request


- All requests will be submitted through unified urban planning portal **(Request for Dubai 2040 alignment service)**

B. Permit processes and requirements

1. Alignment with Dubai 2040 Structure Plan and compliance with Public facilities provision standards



Process flowchart

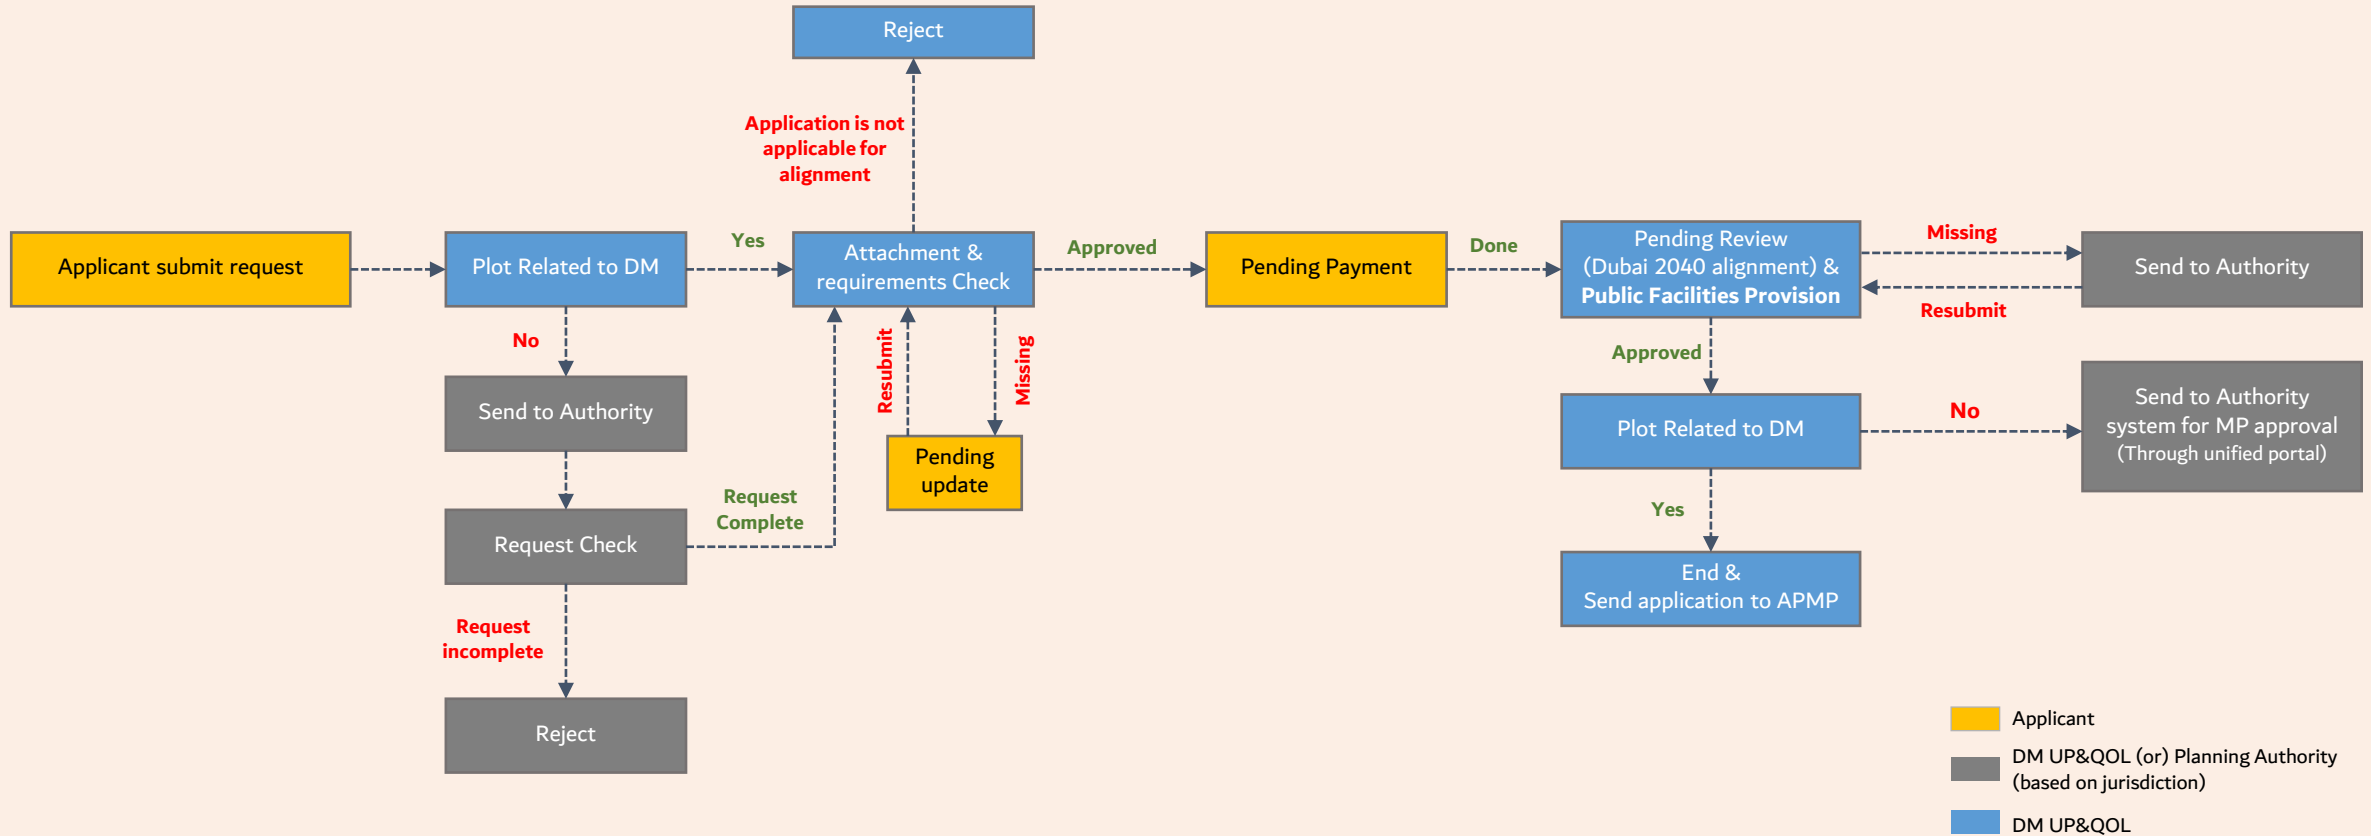

Notes:

1. Planning Authorities are committed to inform DM with any changes in preapproved public facilities during alignment process.

B. Permit processes and requirements

1. Alignment with Dubai 2040 Structure Plan and compliance with Public facilities provision standards



Making a good application

2. Alignment with Dubai 2040 Structure Plan*

1. Project vision, objectives and design principles

- a. Vision: Narrative
 - i. One line statement explaining how the master plan contributes to making Dubai the best city to live in.
- b. Objectives: Narrative and illustration
 - i. Simple clear explanations, which can include both text and illustrations, on how the master plan's objectives are aligned with the Dubai Structure Plan's goals.
- c. Design solutions: Narrative and illustration
 - i. Simple clear explanations, which can include both text and illustrations, showing how the project's objectives are translated into design solutions that apply the principles of Dubai 2040.

* Structure Plan alignment report

The Compliance report for Dubai 2040 plan must be submitted and agreed as a separate report before the preparation of the Draft Master plan report to avoid rework to the draft master plan.

Once approved, the revision should be reproduced in the Draft and Final Master plan report as a record of the agreed design approach.

2. Project summary: Table

- a. Project land use, GFA, resident and worker population density, housing units etc. summary in tabular format.

3. Structure Plan KPI: Table

- a. Table simulating improvements to key performance indicators (KPI) in the area due to the proposed Master plan.

4. Public Facilities: Table and illustration

- a. An assessment table, which outlines the required public Facilities based on the project's projected population and the DM approved standards versus what is provided in the project, as per our approved template. In addition to facilities' catchments illustrations

5. Master plan justification (when not in alignment) Report

- a. Key evidence of:
 - i. Market/ real estate
 - ii. Technical studies: e.g., Environmental, Marine, Heritage etc. carried out by specialist companies to support the project's Vision and Objectives

B. Permit processes and requirements

2. Master Plan Permit



When is this used?

A Master Plan Permit authorizes the implementation of development works based on:

1. Subdivision of unzoned land and the determination of its use.
 2. Major modifications to an approved Master Plan.
 3. Updates to a previously approved Master Plan resulting from cumulative parcel-level changes that exceed the approved threshold limits for overall Master Plan modifications.
 4. All such works shall be undertaken in accordance with the relevant standards, regulations, and procedures adopted by Dubai Municipality.
- Please note that Planning permits may be placed on frozen until the Master Plan is updated and approved to reflect the proposed modification.

Context for development application

1. New real estate master plan development
2. Modification to existing master plans

This includes both:

- a. Major changes initiated by the Developer /Master Developer
- b. Tracking and documenting cumulative changes implemented by sub-developers.

Please refer to the table on the following page for further details regarding:

1. Modification thresholds
2. Villa track requirements and criteria

B. Permit processes and requirements

2. Master Plan Permit



1. Recommended Studies for Major Master Plan Modification

#	Definition	Change limit %	Change limit value	Public facilities feedback	Traffic Impact Study	Environmental Impact Study	Utilities Impact study	Market study
1. Parcel configuration								
a.	Merge or split (change in land area)	+ 10%	10,000sqm	✓	✓	✓	✓	✓
2. Gross floor area								
a.	No change to total GFA but changes to the land use distribution (for any land use change)	+ 10%	20,000sqm	✓	✓	✓	✓	✓
b.	Change to total GFA with/ without change in land use distribution	+ 10%	40,000sqm	✓	✓	✓	✓	✓
c.	Reduction to committed affordable housing GFA requirements	- 10%	27,000sqm					✓
3. Planning regulations and urban design								
a.	Planning and design regulations for parcels. <i>E.g. ground coverage (+), build to line length (±), heights in meters (+), open spaces shading (-) etc.</i>	± 10%	-			✓	✓	
4. Transportation								
a.	Change to number of primary access/ egress (number and location)		Nos 1		✓	✓	✓	
b.	Change to area of rights of way or easements	± 25%	-		✓	✓	✓	
c.	Change to the network configuration (in km)	± 25%	-		✓	✓	✓	
5. Utilities (Power, Water, Sewage, Recycled water, DC etc.)								
a.	Change to easement area in rights of way or parcels	± 25%	-		✓	✓	✓	
b.	Change to allocated parcels (number and location)		Nos 1		✓	✓	✓	
6. Phasing								
a.	Change to project phasing (land area, GFA)	± 10%	-	✓	✓	✓	✓	✓
7. Population Impact								
a.	Change to No. of Residents	+ 10%	2,000 Residents	✓	✓	✓	✓	✓
b.	Change to No. of Workers	+ 10%	2,000 Workers		✓	✓	✓	✓
c.	Change to No. of Visitors	+ 10%	2,000 Visitors		✓	✓	✓	

Notes:

- Submission of an approved or commissioned impact study does not guarantee unconditional approval by the Planning authority.
- The modification threshold and study is based on the Limit % or Value whichever is **higher (or lower)**.
- The Limits is calculated on the basis of the percentage difference between the new or proposed state and the current state. It is based on either:
 - Major changes in one submission by the master developer for an existing master plan.
 - Cumulative changes by sub-developers.

✓ Optional
✓ Required

B. Permit processes and requirements

2. Master Plan Permit



1. Recommended studies for Major Master Plan Modification

1. Parcel configuration

- Where a developer requests merging or subdivision of land exceeding 10,000 sqm or 10% of the total project land area, a Master Plan Permit is required. All relevant studies and NOCs shall be prepared in according with the previously defined requirements.

2. Gross floor area (GFA)

- Changes to land use distribution without changing GFA (e.g., repurposing 20,000 sqm or 10% of total GFA from commercial to residential).
- Change to total GFA through increase (e.g., +40,000 sqm or >10% of approved GFA).
- Reduction of 27,000 sqm or -10% of committed affordable housing GFA requirements

All such cases require the studies as outlined in the previous table.

3. Planning regulations and urban design

- Requests to modify maximum building height (e.g., from 30 floors to 33 floors) where the change exceeds 10% will require a detailed review. This includes assessment of Urban Design, Public Facilities, an Environmental Impact Study.

4. Transportation

- Addition of a new plot access (e.g., introducing a third access point).
- Modification of ROW , including increases of up to 25% of total ROW area.
- Changing to Roads network layout, such as increasing road length by 25% of total network.

All such cases require a traffic impact study and Environmental clearance, and other relevant technical assessments.

5. Utilities

- Where a Master Plan allocates utility parcels, any request by developer to relocate, add, or remove utilities plots, shall require a Utilities Impact Study and NOCs, in addition to obtaining from relevant authorities (DEWA , Etisalat , ...etc.)

6. Phasing

- For a large-scale projects are planned in multiple phases, any proposed expansion of a phase exceeding 10% of the approved phase area shall require the applicable studies and approvals outlined above.

7. Population Impact

- Any increase exceeding +10% or 2,000 persons (residents ,workers and visitors) shall be considered a major modification to the master plan. Such changes require review and feedback on public facilities, along with traffic, environmental, utilities, and market impact assessments.

B. Permit processes and requirements

2. Master Plan Permit



1. Recommended studies for Major Master Plan Modification

Community Facilities	Modification Level	MPP	PP	DM NOC	NOC from Relevant Authorities
General Retail Shopping Center	Remove Facility	✓		✓	✓
Local Mosque					
Juma Mosque					
Early Learning Center	More than 10% reduction from Land area / GFA	✓		✓	✓
Kindergarten					
Primary School					
Intermediate School	Less than 10% reduction from Land area / GFA		✓	✓	✓
Secondary School					
Multi-Levels School					
General Clinic	Redistribution (more than 10%) within approved Land area / GFA	✓		✓	✓
Specialty Clinic					
Polyclinic					
Healthcare Center	Redistribution (less than 10%) within approved Land area / GFA		✓		✓
Hospital					
Neighborhood Park	Remove Facility	✓		✓	
Community Park	More than 10% reduction from Land area	✓		✓	
	Less than 10% reduction from Land area		✓	✓	
District Park	Redistribution (more than 10%) within approved Land area	✓		✓	
Sector Park	Redistribution (less than 10%) within approved Land area		✓	✓	
Ambulance Point	All Modifications Levels		✓	✓	✓
Civil Defense Center			✓	✓	✓
Police Station			✓	✓	✓
Post Shelter**			✓	✓	
Post Office**			✓	✓	
Public Library**			✓		
DM Office**			✓		
DM Center**					
Eid Prayer Area**			✓		✓
Tot Lot **			✓		
Playground **			✓		

** Provision of these facilities is optional

B. Permit processes and requirements

2. Master Plan Permit



2. Villa Track applications ⁽¹⁾

1. What is the Villa Track (VT)?

1. The Villa Track is a special route within the MPP process **that** allows developers to market villa **units for** by investors. **Under this process**, the remaining parcels within the same master plan are frozen **and** cannot be marketed or reserved until all the required **approvals from the relevant** authority are obtained.
2. The Villa Track is based on Circular No. 2 of 2023, regarding The Mechanism for **regulating** procedures For Approving And **alignment of** New Development Projects In Dubai.
3. The process is **initiated** only after the Developer **signs** a Tripartite Agreement with the Dubai Land Department (DLD) and the respective Planning Authority with the approval of the Dubai Municipality, RTA, and DEWA.

2. VT application procedure and requirements

1. **Selection of the** VT option in the MPP submission.
2. **Submission of an** Authorization letter for **handling** dealing with villa parcels.
3. **Approval/sign-off of the plan by** RTA **signs plan** for frozen parcels.
4. **Obtaining** approvals from RTA , DEWA Water and Electricity and DM's Drainage Department.
5. **Signing of the** Tripartite Agreement **between the** Developer, DM Waste & Sewerage Agency CEO and Dubai Land Department.

3. VT Customer journey

1. **The** respective Planning Authority accepts the MPP requirements and regulations.
2. **A** new application number automatically generated: Same MPP application number + VT.
3. **The** VT SOS **is** sent to **the relevant** Authorities for approval.
4. **The** customer attaches the signed 3 **Tripartite** party agreement.
5. Final approval **is issued and** sent to **the** customer.


(1) For General Rules and Regulations, please refer to Circular No. 2 of 2023.

B. Permit processes and requirements

2. Master Plan Permit



Process flowchart

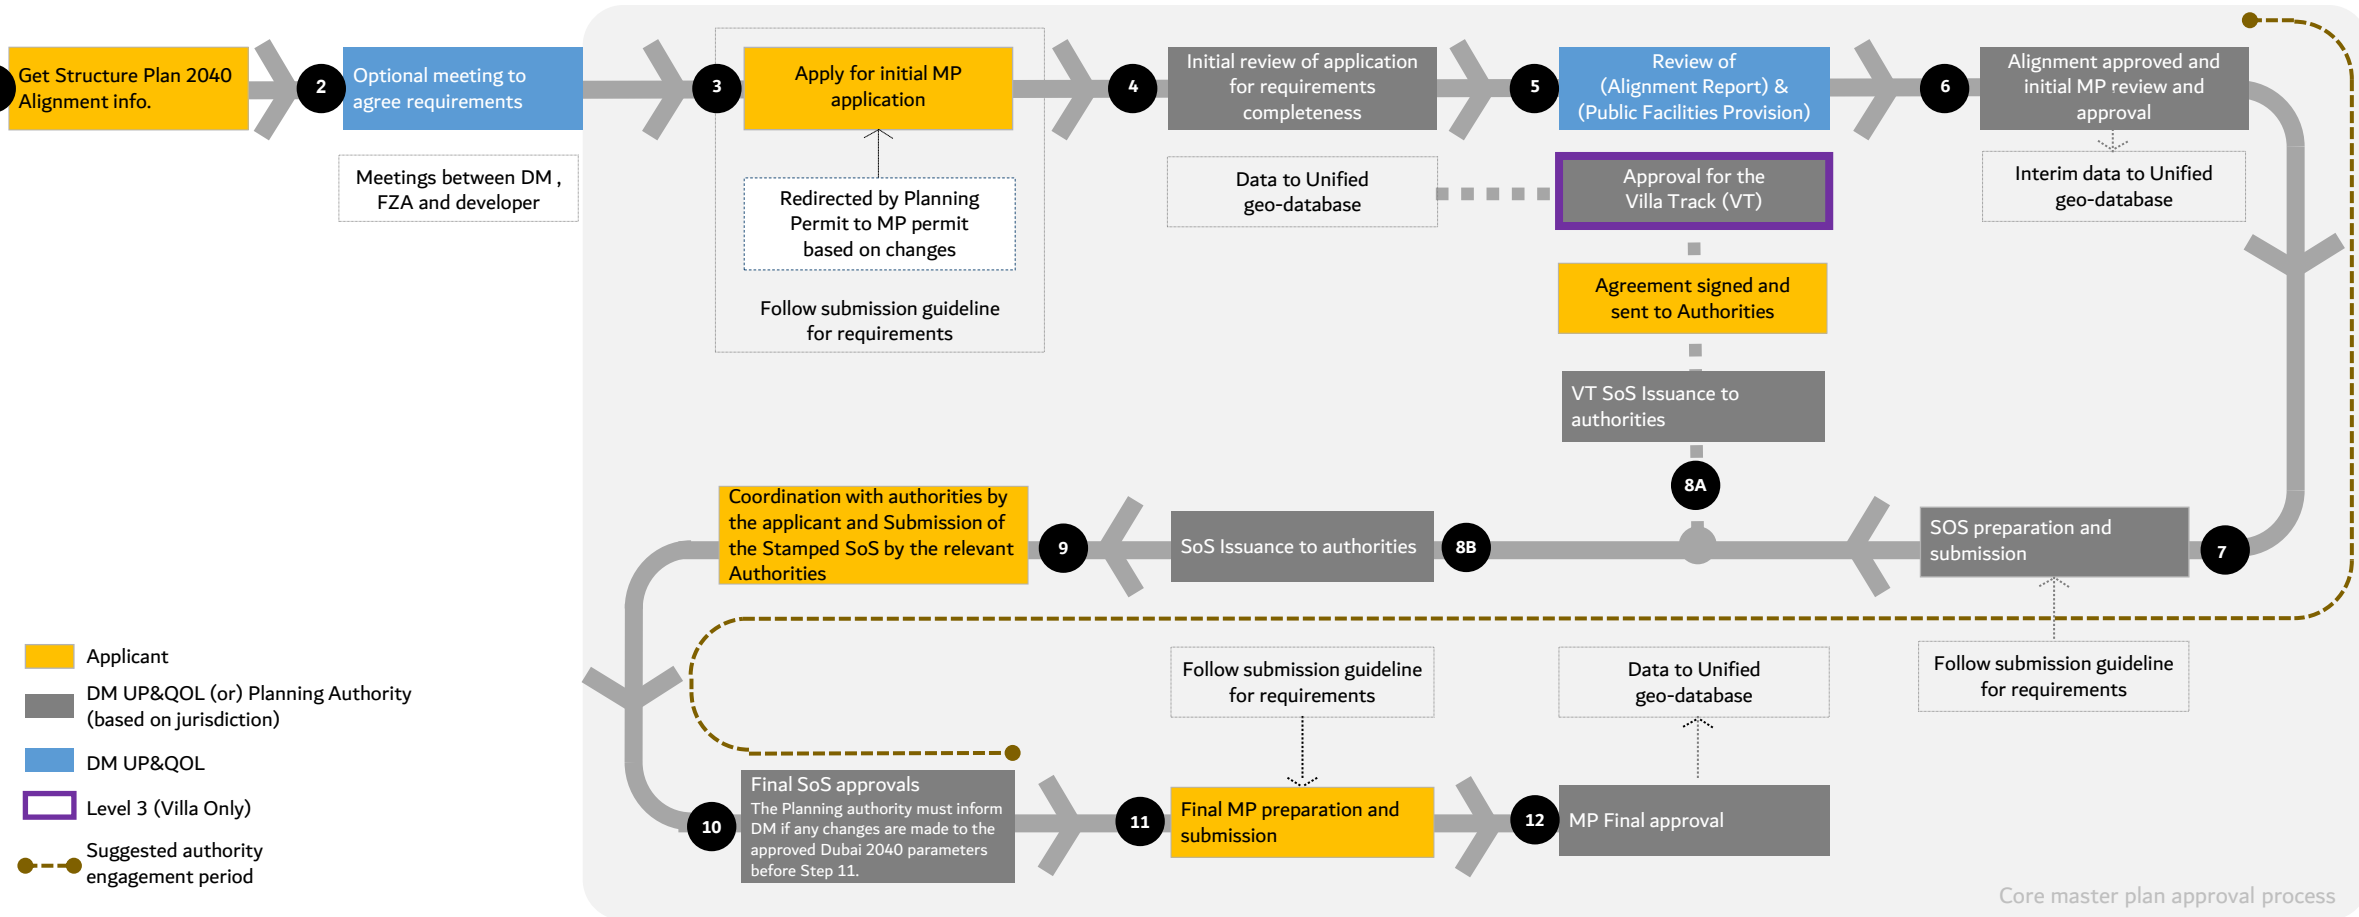

Notes:

1. All submissions must be made via the unified Urban Planning Portal.
2. All correspondence and communication must be conducted through the Portal.
3. Each submission shall include the required report, digital models and files in accordance with the specified requirements.
4. Planning Authorities are committed to inform DM of any changes to the preapproved public facilities provisions and parameters during alignment process.

B. Permit processes and requirements

2. Master Plan Permit



Submission checklist





Master plan permit checklist (R2-2, 30/03/2026)

- The review process begins only when an applicant completes and submits this form, along with all the requirement's.
- All provided material must be clear and concise providing the relevant information as requested.
- Subject to review, you must ensure the issuer to confirm that this is clear latest.

Application number and revision:

Date:

DD/MM/YYYY

Master Developer name:

Development project name

As applicable

As applicable

Parcel number/s

Authorized contact:

Uniquely DM code

Name

Contact details:

Contact phone number:

Email

Phone number

Section	Item	MPF				Requirements ¹			
		Draft and a Final MPF Alignment							
		Y	N/A	NA	N	I	M	T	
1	Consultant details								
	1.1 Consultant's appointment, Master Developer letter/s (if applicable)	✓						✓	
	1.2 Consultant Terms/Letter/s (if applicable)	✓						✓	
2	Draft Structure Plan 2004 Alignment (Submitted as a separate report in Project start)								
	2.1 Project Vision, objectives & design principles	✓						✓	
	2.2 Project Summary (to be read)	✓						✓	
	2.3 Structure Plan (or Performance Indicators) (Regulatory compliance)	✓						✓	
	2.4 Master plan justification (when not in a generic)	✓						✓	
	2.5 Master developer No Objection Certificates (NOCI) for the parcel changes	✓						✓	
3	Site analysis								
	3.1 SWOT analysis of existing used lands and surrounding conditions	✓						✓	
	3.2 SWOT analysis of landscape	✓						✓	
4	Development concept								
	4.1 Description of the proposed concept								
	4.1.1 Master plan's response to the SWOT								✓
	4.1.1.1 Illustrative site plan or satellite base								✓
	4.1.1.2 Master plan's response to the SWOT								✓
	4.1.1.3 Master plan's response to the SWOT								✓
	4.1.1.4 Master plan's response to the SWOT								✓
	4.1.1.5 Master plan's response to the SWOT								✓
	4.1.1.6 Master plan's response to the SWOT								✓
	4.1.1.7 Master plan's response to the SWOT								✓
	4.1.1.8 Master plan's response to the SWOT								✓
	4.1.1.9 Master plan's response to the SWOT								✓
	4.1.1.10 Master plan's response to the SWOT								✓
	4.1.1.11 Master plan's response to the SWOT								✓
	4.1.1.12 Master plan's response to the SWOT								✓
	4.1.1.13 Master plan's response to the SWOT								✓
	4.1.1.14 Master plan's response to the SWOT								✓
	4.1.1.15 Master plan's response to the SWOT								✓
	4.1.1.16 Master plan's response to the SWOT								✓
	4.1.1.17 Master plan's response to the SWOT								✓
	4.1.1.18 Master plan's response to the SWOT								✓
	4.1.1.19 Master plan's response to the SWOT								✓
	4.1.1.20 Master plan's response to the SWOT								✓
	4.1.1.21 Master plan's response to the SWOT								✓
	4.1.1.22 Master plan's response to the SWOT								✓
	4.1.1.23 Master plan's response to the SWOT								✓
	4.1.1.24 Master plan's response to the SWOT								✓
	4.1.1.25 Master plan's response to the SWOT								✓
	4.1.1.26 Master plan's response to the SWOT								✓
	4.1.1.27 Master plan's response to the SWOT								✓
	4.1.1.28 Master plan's response to the SWOT								✓
	4.1.1.29 Master plan's response to the SWOT								✓
	4.1.1.30 Master plan's response to the SWOT								✓
	4.1.1.31 Master plan's response to the SWOT								✓





Section	Item	MIP?				Requirements?					
		Draft MIP & Final MIP Alignment		Y		N		I		M	
		Y	N/A	Y	N/A	Y	N/A	Y	N/A	Y	N/A
4	a. WP the black 'missing' (even from 'yes' or 'no' directions at a minimum)										
	Residential, Commercial and Hospitality										
	a.1 and use 13 plus 3, require for Residential, Commercial and Hosp. Tally										
	b. U at dist. 200m (city side, if applicable)										
5	c. Relevant supporting study/s to the demands/ positioning/ or land uses (see App. 4)										
	Public Facilities										
	a. Public facilities or public dist.										
	b. Public facilities accessibility/ catchment par.										
6	c. Public facilities positions/ dist. (no impact/ restriction with roads and roads and KPNs)										
	Urban design and public realm										
	a. Urban design strategies and concept										
	b. Urban design concept par.										
7	c. City of the typologies and heights plus 1										
	d. Public realm and landscape strategies and concepts										
	e. Recreational open space and accessibility plan										
	f. Public recreational open space table (App. 5C)										
8	g. Street corridor section with annotations										
	h. Street corridor section with annotations										
	i. Suitable perspectives in the context of the surrounding areas										
9	Environment and sustainability impact summary										
	Proposed solutions										
	a. Nature based										
	b. Sustainable solutions										
10	Environmental Impact										
	a. Effect, low, air, water, soil, noise, light, trees/ greenery, conservation and KPNs										
	Transport Impact Summary										
	Overall transport demand and assumptions (traffic/ parking/ etc)										
11	a. Trips										
	b. Parking										
	Overall transport plan showing external connections, sites, corridors and capacity										
	a. Road hierarchy (with at least 2 above/ below grade identified)										
12	b. Access, junctions and connections										
	c. Main public transit stops										
	Summary of overall proposal and any agreed changes (Justifications if needed)										
	a. Road hierarchy										
13	b. Proposed changes/ agreed changes with evidence from concerned authority										
	(Includes any changes to road cross-section)										
	Public transit and mobility integration										
	a. Public transit routes/ circulation										

¹ N = 'Not a', I = 'Impact', M = 'Major', L = 'Little'

² Project data may be shared at district/ level during the draft stage. However, all or some may be drafted for the Final MIP to be 'sound'.

³ May be that may be considered in the report provided to help make it clear. Each topic should be to the own GIBS bytes to facilitate review.





Section	Item	MPD					Requirements ²						
		Draft MP A		Final MP A		Alignment	Y	NA	Y	NA	I	M	T
	a. Set monthly rentals/ ¹ of station showing shaded 'rooms'												
	b. Purchase plans for public transit stops ³												
5	Purcell access plan (entry / egress)												
	a. Vehicle entry / egress access ⁴												
	b. Restricted access ⁴												
	c. Civil defence routes ⁴												
	d. Solid waste collection route ⁴												
6	Parking plan												
	a. Or parking, bus lane, bus stop, park, share ⁴												
	b. Or street ⁴												
7	Utilities summary⁵												
1	Utility overall demands and assumptions for each												
	a. By facility and for each utility												
2	Overall utility plan												
	a. Proposed plan, corridors and agreed easements ⁴												
	b. Show main easement limits points ⁴ , if possible ⁴												
3	Summary of overall proposal and agreed changes (justifications if needed)												
	a. To limit variation												
	b. Or show no location / agreed charges												
4	Each utility explained separately (see list in notes)												
	a. Approvals to manage each S/WOT												
	b. Proposal and any agreed changes												
	→ Drawn up justification												
	→ Evidence of agreement with Authority												
	c. Utility assumptions and calculation method												
	d. Size and network plan												
8	Additional Requirements⁶												
1	Overall phasing table												
	a. Phase and population												
	b. Utilities												
	c. Excavated Utilities												
2	Overall phasing plan												
3	Phasing plans												
	a. and each by phase												
	b. Indicate the order works												
5	Asset ownership table (for each asset over life-cycle)												

¹ N = Yearly, W = Weekly, M = Monthly, L = Life

² Projects identify key shared and discrete level during the draft stage. If discrete, all results are derived for the Final MPD to be 'sound'.

³ May be that may be considered in the report provided no information is clear. Each topic should be on the own GNS layer to facilitate review.

Notes

1. **All plans/ maps and tables should co-relate and cross reference each other in GIS.**
2. **Maps marked with a BLUE ✓ are not mandatory for the report but must be made available based on the master plan requirements.**
Drawings may be combined, provided the information is clear and easy to follow.
However, all content must be available on appropriate GIS layers to facilitate incidents at review.
3. **Transport Includes:**
 Vehicular, public transport _____
 Semi-trail, by Pedestrian, cycling _____
 Marine (if applicable) _____
 Relevant operations: Civil defense, delivery, solid waste, restricted/ public areas etc. _____
4. **Utilities Include:**
 Ww, Potable Water, Sewer, gas, Storm, Recycled water, High-voltage, Fire fighting _____
 Dry High/Medium/Low Voltage Power, Telecommunications, IT, CCTV _____
 Other (if applicable): Stream crossing, gas _____

Appendix

1. **Consultation report**
 Summary of meeting held with authorities to address NOCs based on the approved master plan policies.
 Note should contain proposals/ issues/ solutions/ justification and final NOC.
 Details of NOCs received (should be available DIGITAL/V in the system)
2. **GIS (Geo-referenced to DLM, aligned to Spatial Geodatabase attributes)**
 SHP: Site location
 SHP: Locating subdivision within all planning attributes
 SHP: Proposed subdivision with a planning attributes
 SHP: All transport and mobility networks with attributes
 SHP: All utilities sites and network with attributes
 SHP: All open spaces with soft/mobile recreation facilities
 SHP: All public and low-mobility attributes
 SHP: All urban design and planning regulations
 SHP: Projections of all assets/ lane with attributes
3. **Detailed Project Budget**
 All calculations should be dynamic with formulae and should link to the GIS
4. **Studies/ Assessments by recognized consultants (present each study as an Executive Summary)**
 A. Socio-economic impact and market impact (including housing) a) "affordable housing"
 B. Transport Impact
 C. Environmental Impact
 D. Heritage Impact
 E. Heritage Impact
 F. DCR
 G. Others as relevant
 a. Public opinion survey (optional, on a case-by-case basis)
 b. Noise and Vibration Impact studies and assessment study
 c. Worker Housing Design typologies and cost saving study

Key notes:

1. **Supporting documents:** Additional studies prepared by qualified professionals may be requested to support specific aspects of the application, where required.
2. **Propriety specifications:** Not recommended unless the application involves the implementation of a complex master plan.

File: UPP - Checklist - Master plan permit - R2.2.pdf

B. Permit processes and requirements

2. Master Plan Permit



Making a good application

3. Site analysis

1. SWOT analysis: Narrative in Tabular format

a. General Requirements:

- Describe how the identified factors influence the qualitative experience of the user or the quantitative aspects of the development:
 - **Qualitative Aspects:** View corridors, access to water, environmental quality etc.
 - **Quantitative Aspects:** Development land area, conservation area, length of infrastructure networks and other measurable components.
- Use plans, sections, and photos as needed.

b. Strength (S) and Weaknesses (W): Focus on internal site related issues factors, including:

- Current planning and design regulations (land use, heights etc).
- Surrounding socio-economic conditions.
- On site and adjacent topographic, natural/ environmental and built man-made features (built, under construction, or committed developments areas).
- Availability and tie-in of utilities and transportation connections networks.

c. Opportunities (O) and Threats (T): Focus on external factors related to affecting the project, including:

- Wider socio-economic trends and their impacts on local market.
- Technology factors and innovations.
- Legal and regulatory considerations.
- External topography and natural/ environmental systems.
- Wider area infrastructure corridors and their influence on the site.

2. SWOT analysis: Drawing requirements on satellite/roads base map (whichever is clearer)


The SWOT analysis shall be illustrated using a clear satellite image or road base map, whichever provides better clarity.

General Requirements:

- Illustrate and reference all the **Strengths (S)** and **Weaknesses (W)** listed in the **SWOT** table.
- Where applicable, identify and illustrate external **Opportunities (O)** and **Threats (T)** that may influence the project.
- Ensure all key factors are clearly marked and referenced on the drawing.



3. Site analysis

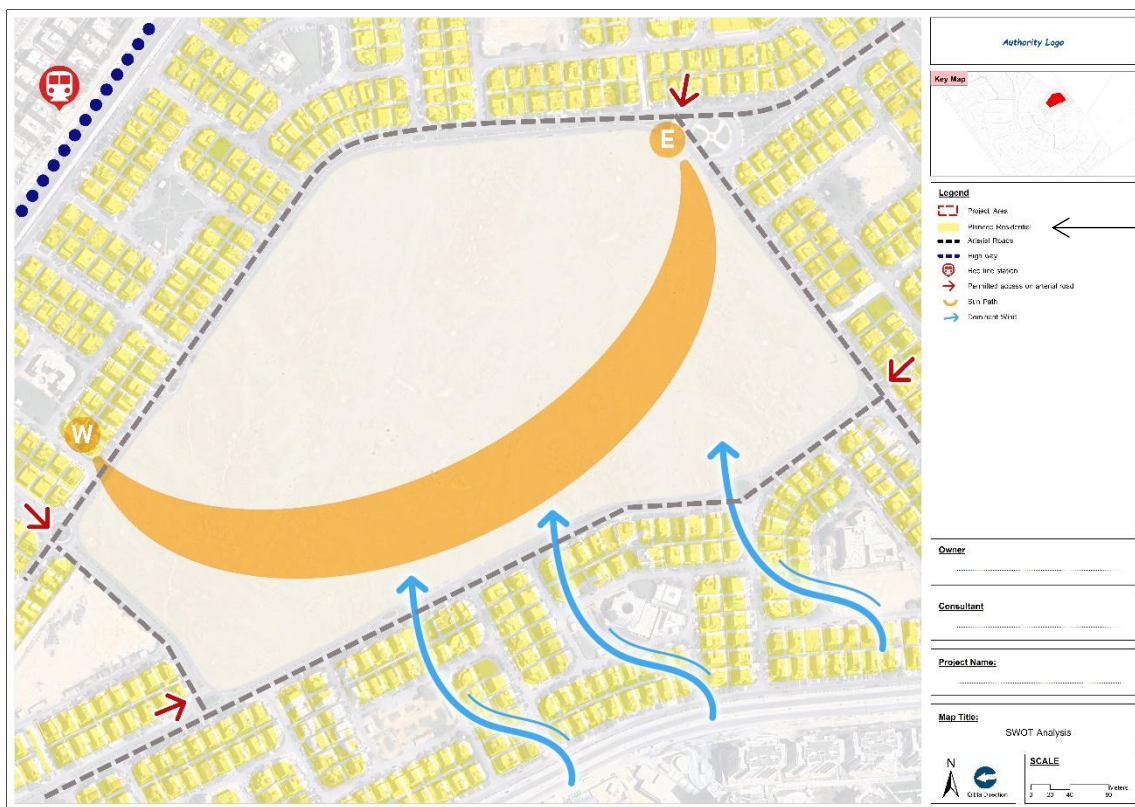

Legend

Important uses and landmarks

- Planned residential areas
- Existing lake
- Red line Metro station
- Permitted access on arterial road

Important overlays

- Frozen utility corridor
- Air taxi Flight path
- Sector center
- Natural conservation area

Natural features


- Sun path
- Dominant wind

— Site

Total area sqm

North point

Scale



B. Permit processes and requirements

2. Master Plan Permit



Making a good application

4. Development concept

1. Description of proposed concept

a. Master plan's response to the SWOT: Narrative

Provide a clear and concise explanation, using bullet points, describing how the proposed master plan addresses the identified SWOT factors. The narrative should demonstrate how the proposed design solutions:

- Capitalize on the identified **Strengths (S)** and **Opportunities (O)**.
- Mitigate the identified **Weaknesses (W)** and **Threats (T)**.
- Enhance the overall development potential, user experience, and integration with the surrounding context.

a. Illustrative site plan on satellite base: Image

Provide an illustrative site plan over a satellite base map demonstrating how the proposed master plan solutions:

- Utilize existing site opportunities and natural features.
- Address site constraints and identified challenges.
- Improve connectivity, accessibility, open spaces, and integration with surrounding developments

a. Master plan key performance indicators (KPIs): Table

Provide a KPI table highlighting the performance and unique proposition of the proposed master plan, including:

- Alignment with Dubai 2040 Structure Plan objectives
- Compliance with relevant manuals, policies, and planning standards.
- Other important factors as determined by the developer.

Where possible provide a Before/ After and comparison with known against relevant benchmarked targets to highlight the Master plan's performance and added value.

2. Population served

a. Population Assumptions and overall projection (residents, workers, and visitors)-Table

- Confirm the population assumptions applied to each land use category.
- Highlight any alternate assumptions used, with a brief justification.
- Provide Population summary indicating:
 - Development holding capacity
 - Population Density across the project area
 - Indicative resident profiles (market, affordable, and low-income housing)
 - Indicative worker profiles (domestic, other workforce categories)

b. Population Density Plans- GIS Drawings

- Residential population density as heat map
- Employment population density as heat map

c. Socio-economics Assessment with Focus emphasis on affordability and low-income housing (if applicable): Narrative and table

- A specialized study shall be provided to support any assumptions related to total affordable or low-income housing GFA, spatial distribution of GFA and proposed residential unit mix and typologies.

B. Permit processes and requirements

2. Master Plan Permit



Making a good application

4. Development concept

Planned Development

a. Overall land use plan- Drawing

- i. Land use Level 1 (L1)
- ii. GIS template provided

b. Ground floor land use plan- Drawing

Ground floor land use allocation should consider active uses, particularly facing open space and pedestrian routes.

- i. Land use Level 2 (L2)
- ii. GIS template provided

c. Land use budget- Table

- i. Land use Level 1 (L1) summary by district summary for Report
 - ii. Land use Level 2 (L2) schedule by parcel for GIS* submission
 - iii. MS Excel template provided
- *Where if multiple land uses are allocated to a single parcel, all applicable land uses (Level 2 and corresponding Level 1) categories shall be included in the parcel land use budget.
 - If a proposed land use is not included within the current Land use Manual, the developer may request a new L1 or L2 category to be added subject to DM review and approval of the justification prior to final submission.


B. Permit processes and requirements

2. Master Plan Permit



Making a good application

4. Development concept

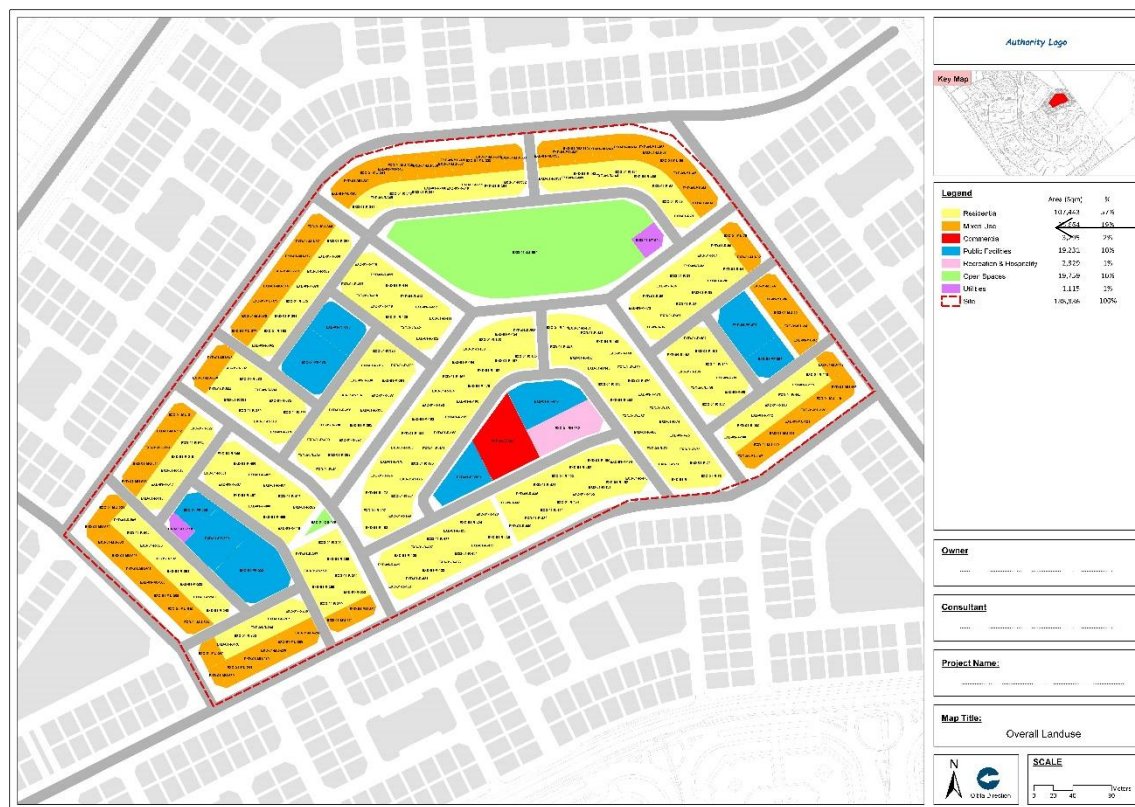

Overall Land use (Level 1)

Legend

Mixed Use	Land area sqm %
Residential	Land area sqm %
Recreation & Hospitality	Land area sqm %
Commercial	Land area sqm %
Public Facility	Land area sqm %
Agriculture	Land area sqm %
Park/Open Space	Land area sqm %
Industrial	Land area sqm %
Transportation/ Road	Land area sqm %
Public Utility	Land area sqm %

— Site Total area sqm

North point
Qibla

Scale


B. Permit processes and requirements

2. Master Plan Permit



Making a good application

4. Development concept

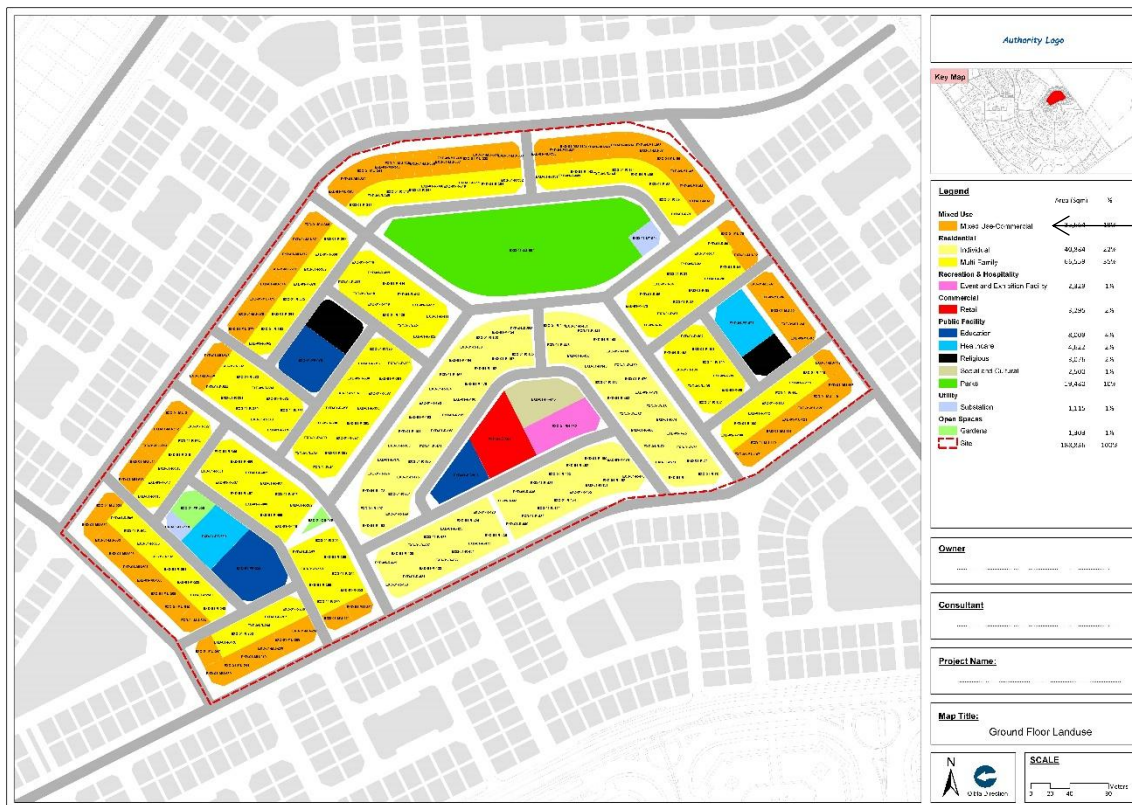

Ground floor land use (Level 2)

Legend

Mixed Use	Land area sqm %
■ Mixed Residential	
■ Mixed Commercial	
Residential	Land area sqm %
■ Individual	
■ Multi-Family	
Recreation & Hospitality	Land area sqm %
■ Event and Exhibition Facility	
Commercial	Land area sqm %
■ Retail	
Public Facility	Land area sqm %
■ Religious	
■ Healthcare	
■ Social and Cultural	
Transportation/ Road	Land area sqm %
■ Public Transit station	
■ ROW	
Public Utility	Land area sqm %
■ Substation	
■ GSA Tower	
■ MMR	
■ Pump Station	
■ Storm Tank	

— Site Total area sqm

North point
Qibla Scale

B. Permit processes and requirements

2. Master Plan Permit



Making a good application

4. Development concept

i. Land use Level 1 (L1) by district summary for Report: Table

Where the project is located within a designated Center or Transit-Oriented Development (**TOD**), the districts summary shall be further disaggregated as follows:

- **TOD Areas:**
 - a. Hub
 - b. Neighborhood
- **Centers:**
 - a. Urban Center
 - b. Multi-Sector Center
 - c. Sector Center

The table shall clearly present the distribution of L1 land uses within each applicable **TOD** or Center classification.

ii. Land use Level 2 (L2) by parcel for GIS: Table

Building Heights

a. Building Heights Plan: GIS Drawing

- I. Prepare a Building Heights Plan showing the maximum permitted building heights expressed in **number of floors**.
- II. The plan shall be submitted in the approved GIS format and aligned with the overall master plan.

b. White Block Massing- Digital file

- Provide a geolocated white block massing model representing the proposed development form and building heights.
- The model shall be submitted in a format viewable in:
 - a. Google Earth
 - b. GIS platforms
 - c. SketchUp
- The digital model shall be accurately georeferenced and coordinated with the approved master plan and GIS submission.

Detailed project budget																																																					
		Master plan data																				Proposed Building data						Infrastructure strategic planning data								Other																	
Parcel ID	Center	Landuse Category		GFA Category		Building Height										Setbacks				Development data		Population data				Parking data				Utility demand				Misc. Data																			
		Parcel Area	LU Level 1 (LU1)	LU Level 2 (LU2)	Split by LU Level 3 (LU3-1, 2, 3, 4,...)	FAR	Total GFA	Split by LU Level 3 (GFA LU3-1, 2,3,4,...)	Total (Floors)	Building Max height	Ground Floor Max height	Podium height	Podium (floors)	Tower/ building height (floors)	Tower/ building height (floors)	Basement height	Basement (floors)	Podium side 1	Podium side 2	Podium side 3	Podium side 4	Tower/ building side 1	Tower/ building side 2	Tower/ building side 3	Tower/ building side 4	Plot coverage	Number of buildings	Area of green space	Proposed development phase	Proposed development year	Total units	Units split by LU Level 3 (Units LU3-1, 2,3,4,...)	Affordable housing unit split	Max. residents	Max. Employees	Max. Visitors	Underground area	On surface area	Above surface area	Total Space	Parking split	Power demand	Renewable energy	Gas	Potable water	Sewage	Drainage	Irrigation	Predominant building material	Proposed asset owner			
#		sqm				sqm	sqm	m	#	m	m	m	#	m	m	#	m	m	m	m	m	m	m	m	m	%	#	sqm	#	#	#	#	#	#	#	#	#	sqm	sqm	sqm	sqm	#	kVA	kVA	BTU	m3	m3	m3	m3				


B. Permit processes and requirements

2. Master Plan Permit



Making a good application

4. Development concept

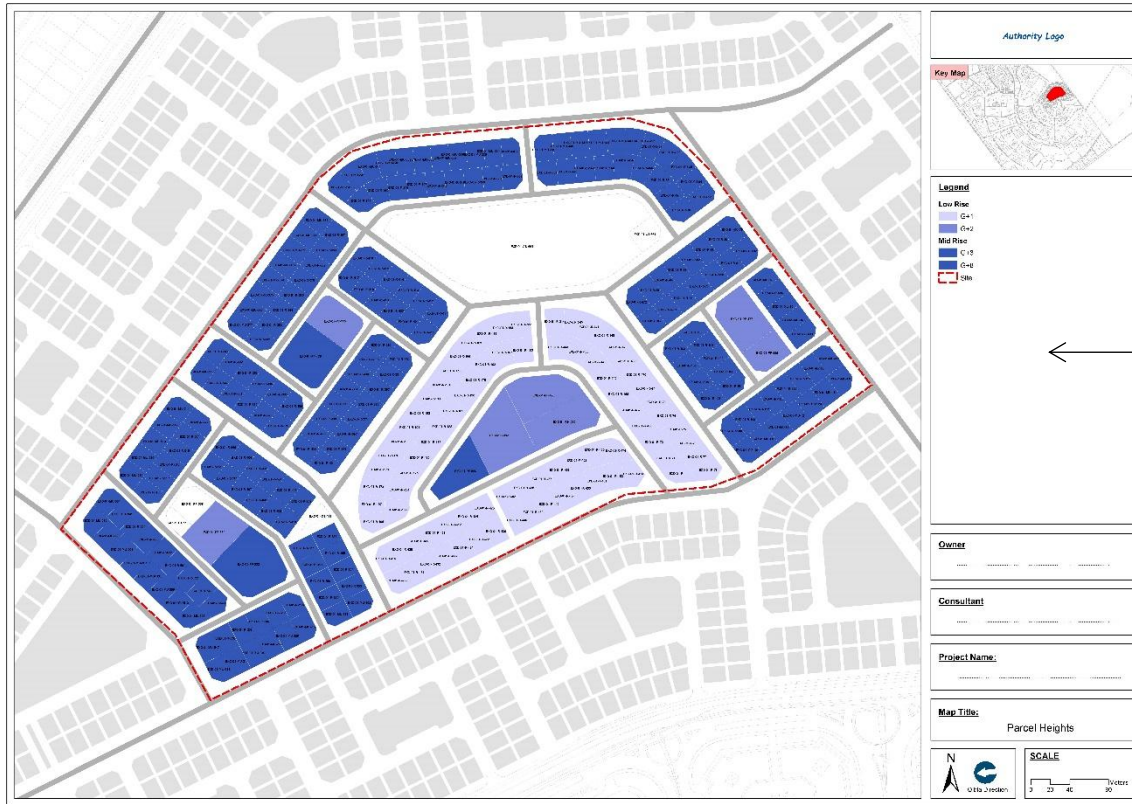

Building heights restriction plan

Legend

Low rise

■ G (Ground Floor Only)

■ G+1 (2 Floors)

Mid rise

■ Up to 10 Floors

High rise

■ Up to 20 Floors

Super tall

■ 21 Floors and Above

— Site

North point

☉ Qibla

Scale

B. Permit processes and requirements

2. Master Plan Permit



Making a good application

4. Development concept



White block massing image sample

B. Permit processes and requirements

2. Master Plan Permit



Making a good application

4. Development concept

4. Residential, Commercial and Hospitality

a. Land use Level 3 Plans: GIS Drawings

- i. Residential plan showing Level 3 and affordable housing (if applicable)
- ii. Commercial plan showing Level 3
- iii. Hospitality plan showing Level 3
- iv. If project is in center or TOD provide zonal boundaries of each to the plans

b. Unit distribution plan by district at Land use Level 3: Table

Where the project is located within a **Center** or **TOD**, the unit distribution shall be presented according to the relevant zonal boundaries.

c. Supporting Market and Feasibility Studies

- i. Residential
 - Market Housing
 - Affordable (as applicable)
 - Low-income housing (as applicable)
- ii. Office space (Grade A vs Grade B)
- iii. Retail Typologies and Formats
- iv. Hotels

to support any assumptions made on total provided GFA, distribution of GFA within the master plan, and unit types, where this information was not provided during the Alignment stage.


B. Permit processes and requirements

2. Master Plan Permit



Making a good application

4. Development concept

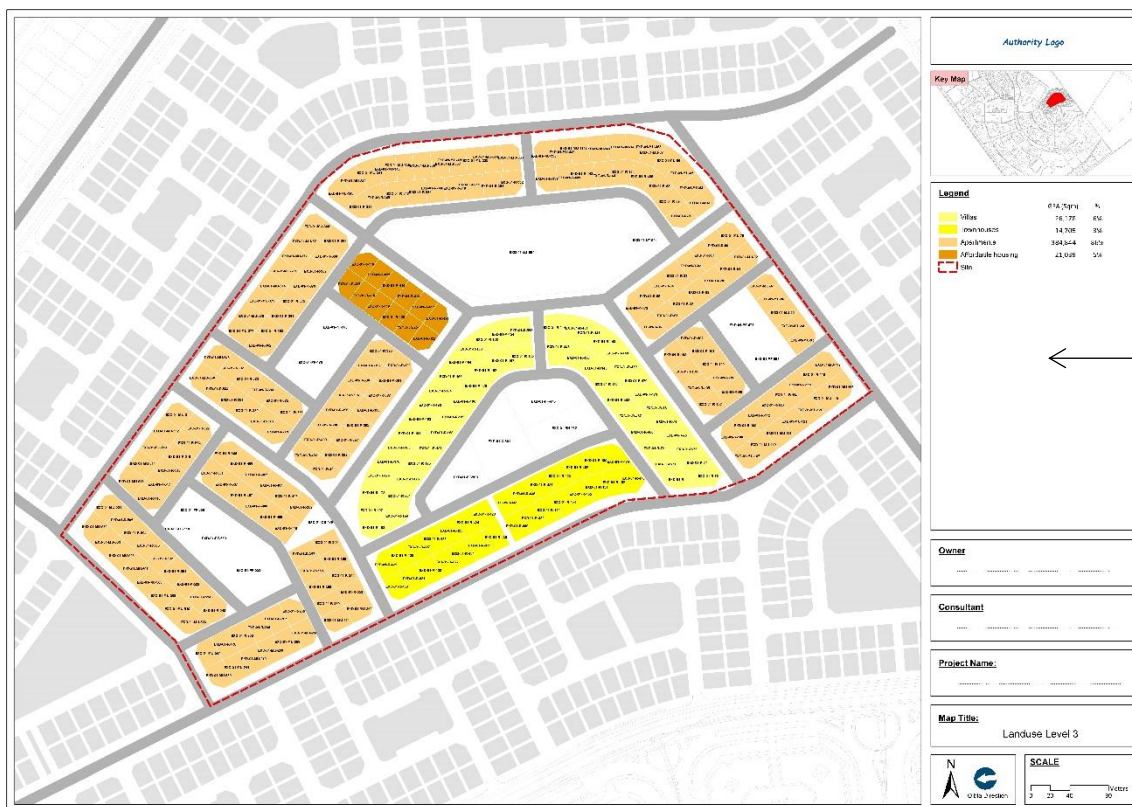

Residential use*

Legend

Residential	GFA	Units	GFA % Units %
Villas			
Townhouses			
Apartments			

Affordable housing units GFA % Units %

— Gated community area

■ Public transit station

— Site
North point
Qibla

Scale


B. Permit processes and requirements

2. Master Plan Permit



Making a good application

4. Development concept

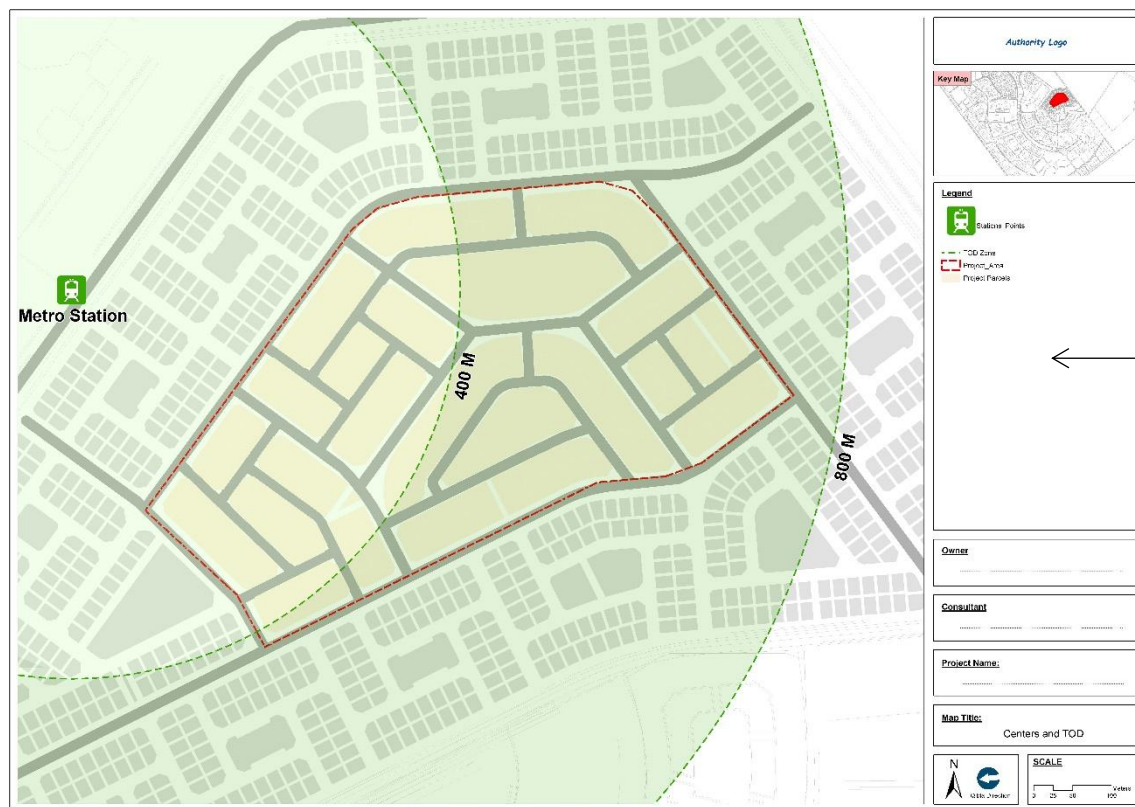

Centers and TOD

Legend

- Station
- Parcels

TOD

- Hub Land area sqm %
- Neighborhood Land area sqm %

Center

- Urban Land area sqm %
- Sector Land area sqm %
- Multi-Sector Center

- Site Total area sqm

North point
Qibla

Scale

B. Permit processes and requirements

2. Master Plan Permit



Making a good application

4. Development concept

5. Public Facilities

1. Public Facilities Plan- Land Use Level 3 (L3)- Drawing

- Prepare a GIS-based drawing showing **project and surrounding public facilities** at Land Use Level 3 classification.
- The plan shall clearly identify existing and proposed public facilities within and around the project area.

2. Accessibility Analysis Layers

- Provide a **20-minute isochrone layer** illustrating accessibility to key public facilities.
- Provide a **spatial catchment layer** showing service coverage and distribution of public facilities.

Both layers shall be submitted separately within the GIS package.

3. Unit Distribution by District – Land Use Level 3 (Table)

- Provide a table showing unit distribution by district at Land Use Level 3.
- The table shall clearly indicate:
- Compliance with public facility standards.
- Any deviations from applicable standards, if present.

Proposed Community Facilities:

Symbol	Name of Facility	DM Requirements		Project Proposals		Notes
		No.	Area (m ²)	No.	Area (m ²)	
	Local Mosque					
	Juma Mosque					
	Eid Prayer Area (Musalla)					
	Children Nursery					
	Kindergarten					
	Primary School					
	Intermediate School					
	Secondary School					
	Multi-Level Sch. (Kg+Prim)					
	Multi-Level Sch. (Kg -12)					
	Gov. Health Centre					
	Private Clinic					
	Gov. Hospital					
	Private Hospital					
	DM Service Centre					
	Smart Police Point SPS					
	Police Station					
	Civil Defense Point					
	Civil Defense Centre					
	Ambulance Point					
	Public Library					
	Commercial Facility					
	Retail Facility					
	Family Plaza					
	Sports Courts					
	Family Park					
	Community Park					
	District Park					


B. Permit processes and requirements

2. Master Plan Permit



Making a good application

4. Development concept

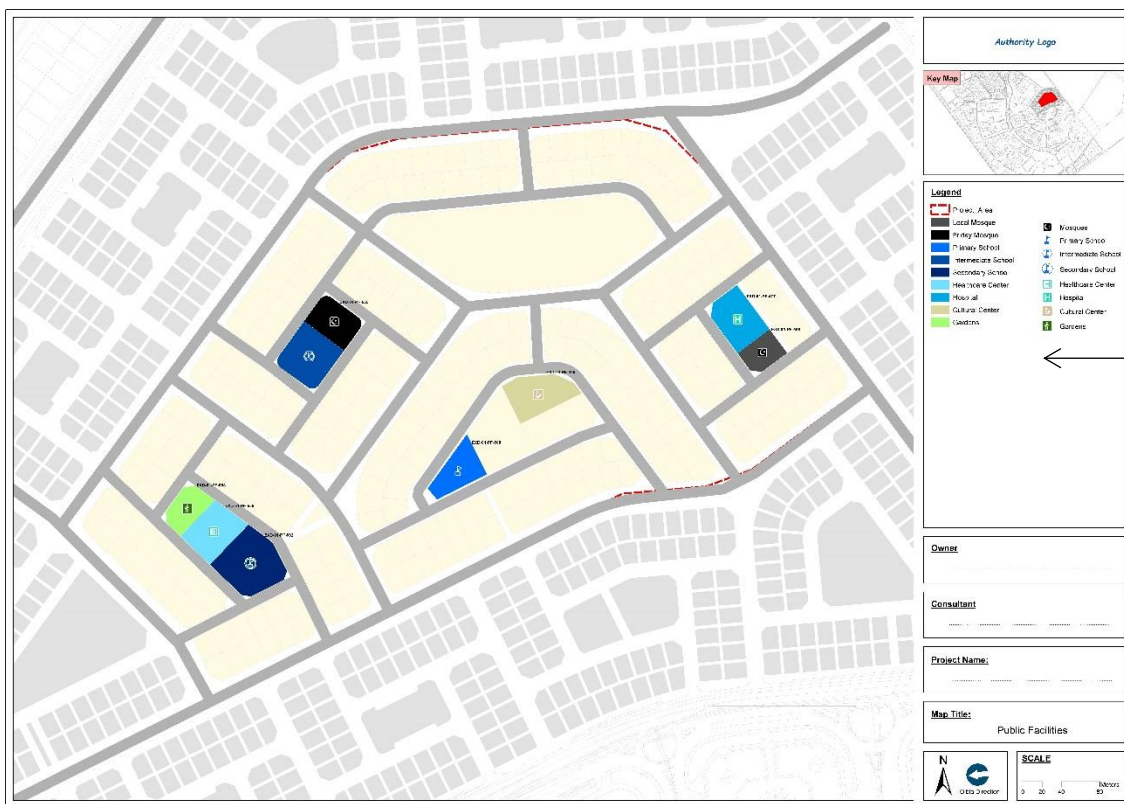

Public facilities provision plan

Legend

Mosques	
Local	# Provided (# Required)
Juma	# Provided (# Required)
Schools	
Early Learning Center (in bldgs.)	# (#sqm GFA)
Early Learning Center (on parcel)	# Provided (# Required)
Kg-12	# Provided (# Required)
Health	
Clinic	# Provided (# Required)
Polyclinic	# Provided (# Required)
Healthcare Center	# Provided (# Required)
Hospital	# Provided (# Required)
Parks	
Neighborhood	# Provided (# Required)
Community	# Provided (# Required)
District	# Provided (# Required)
Sector	# Provided (# Required)
Commercial (in bldgs. or on parcel)	
Retail	# (#sqm GFA)
Shopping Center	# (#sqm GFA)
Other	
Police	# Provides (# Required)
Civil Defense	# Provided (# Required)
Ambulance	# Provided (# Required)
Municipality	# Provided (# Required)
Public transit station	

20-minute isochrones (400m, 800m, 1000m, spatial catchment as per facility type) should be made available in the GIS submission

— Site
North point
Qibla

Total area sqm
Scale

B. Permit processes and requirements

2. Master Plan Permit




Making a good application


4. Development concept



Proposed Public Facilities

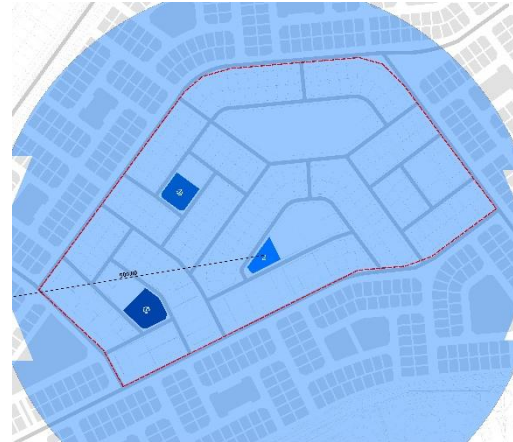

Education Facilities

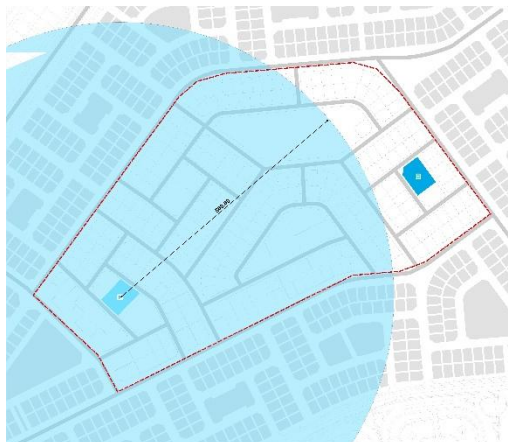

HealthCare Facilities



Religious Facilities

Public facilities accessibility plan

Legend

■ Residents within 20-minute catchment of essential facilities

Mosques

● Local # Provided (# Required)

● Juma # Provided (# Required)

Schools

● Early Learning Center (in bldgs.) # (##sqm GFA)

● Early Learning Center (on parcel) # Provided (# Required)

● Kg-12 # Provided (# Required)

Health

● Clinic # Provided (# Required)

● Polyclinic # Provided (# Required)

● Healthcare Center # Provided (# Required)

● Hospital # Provided (# Required)

Parks

● Neighborhood # Provided (# Required)

● Community # Provided (# Required)

● District # Provided (# Required)

● Sector # Provided (# Required)

Commercial (in bldgs. or on parcel)

● Retail # (##sqm GFA)

● Public transit station

— Site

North point

Scale

Qibla

B. Permit processes and requirements

2. Master Plan Permit



Making a good application

4. Development concept

6. Urban design and public realm

a. Urban design strategies: Narrative

Brief explanation of the urban design approach, highlighting how the master plan creates identity, improves connectivity, activates public spaces, and integrates built form with landscape and context.

b. Urban design concept plan: Drawing

Prepare a concept plan illustrating the key urban design framework, including:

- i. Defined **character areas/districts** that will guide future architectural language and public art themes.
- ii. Key **landmark sites and nodes** acting as anchors for identity and orientation.
- iii. **Shaded corridors**, including key streets and through-block connections.
- iv. Important **plazas, squares, and open spaces** forming the public realm network.
- v. Protected **view corridors** from key parcels and streets to be preserved and enhanced

c. Building typologies and heights: Drawing

Provide a building typology and height strategy drawing that includes:

- i. Minimum and/or maximum height controls, where applicable.
- ii. Clear definition of building typologies across the master plan.
- iii. Total number of floors, including the ground floor.
- iv. Relationship between building heights and surrounding public realm and open spaces.


B. Permit processes and requirements

2. Master Plan Permit



Making a good application

4. Development concept

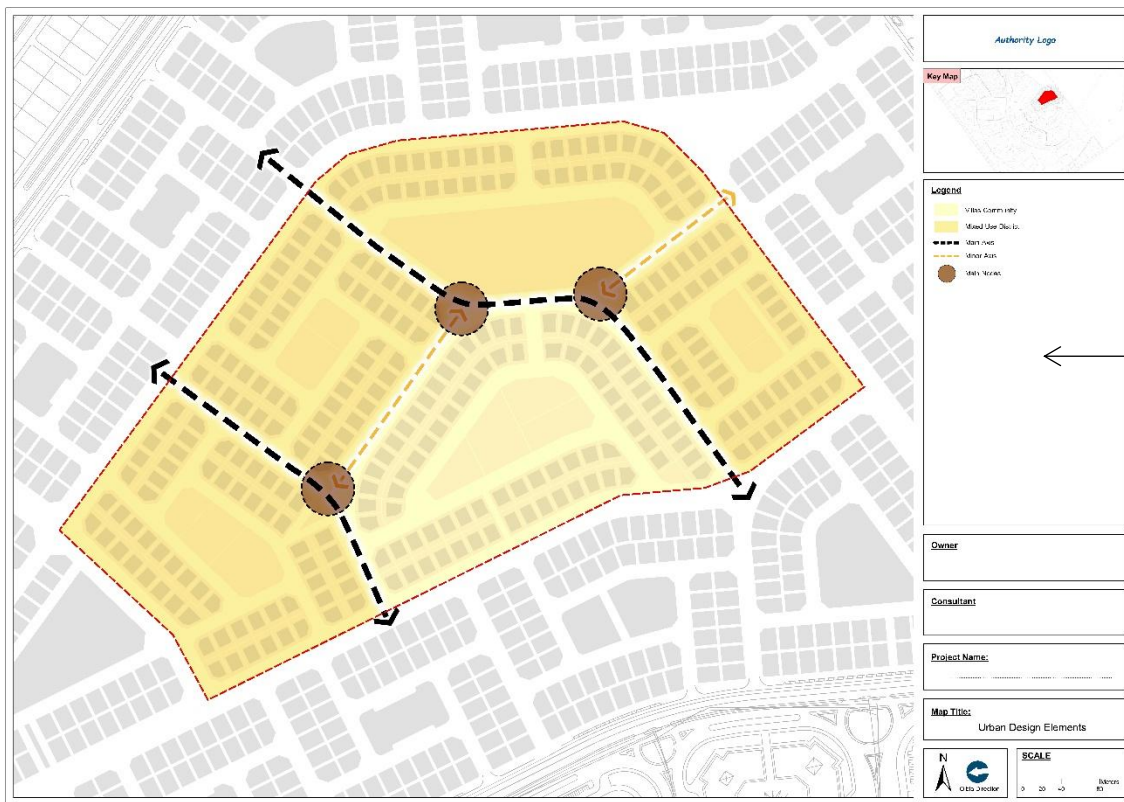

Urban design concept plan

Legend

- Character areas
- Gated community area
- Key wayfinding and signage

Urban design elements

- Nodes
- Landmarks
- Public art
- ⌂ Protected view corridors

Shaded routes

- Tree lined XXkm %
- Arcades XXkm %
- Total pedestrian routes XXkm

- Transit plaza 1 XXsqm
- Shaded area xxsqm xx%
- Transit plaza 2 XXsqm
- Shaded area xxsqm xx%

- Site
- North point
- Qibla
- Scale


B. Permit processes and requirements

2. Master Plan Permit



Making a good application

4. Development concept

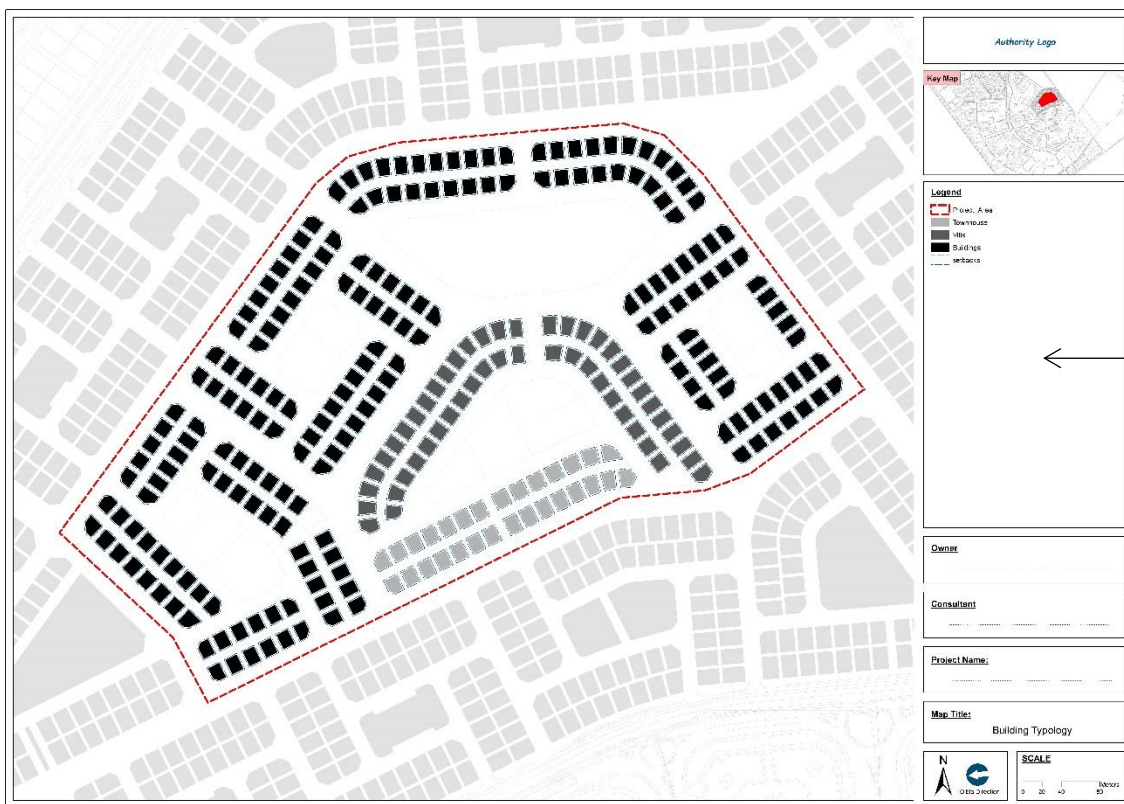

Building typologies plan

Legend

- Building
- Setback
 - Build-to line
 - Active-edge
 - Landscape zone
 - ① Min height
 - ① Max heights

- Podium
- Setback
 - Build-to line
 - Active-edge
 - Landscape zone
 - ① Min Heights
 - ① Max Heights

- Site
- North point
- Qibla

Scale

B. Permit processes and requirements

2. Master Plan Permit



Making a good application

4. Development concept

6. Urban design and public realm

d. Public realm and landscape strategies- Narrative

Provide a brief and clear description of the public realm and landscape approach, including open spaces, connectivity, and user experience.

e. Recreational open space Plan – Drawing:

Illustrate the distribution and hierarchy of parks, plazas, promenades, and other public recreational open spaces.

f. Public recreational open space accessibility- Table

Provide an accessibility assessment showing compliance with the applicable public open space accessibility standards.

B. Permit processes and requirements

2. Master Plan Permit



Making a good application

4. Development concept



Recreational open space and landscape plan

Legend

Public open space	XXsqm XX%
Park type 1	XXsqm XX%
Park type 2	XXsqm XX%
Public recreational	XXsqm XX%
City level park	XXsqm 5%

Private open space	XXsqm XX%
Sport Courts type 1	XXsqm XX%
Sport Club type 1	XXsqm XX%
Total open space	XXsqm XX%

— Site XX Total area sqm

- 20-minute isochrone
- 800m spatial catchment

— Site
North point
Qibla
Scale

B. Permit processes and requirements

2. Master Plan Permit



Making a good application

4. Development concept

6. Urban design and public realm

g. Site Sections- scaled illustrations

- i. Longitudinal sections along the main street(s) showing the indicative skyline.
- ii. Cross sections along key streets showing the indicative skyline

h. Street Cross Sections- scaled illustrations

- i. Illustrate all proposed street typologies.
- ii. Demonstrate coordination between buildings, landscape, transport, and utilities.
- iii. Identify any proposed deviations from approved standards, with supporting justifications.


B. Permit processes and requirements

2. Master Plan Permit



Making a good application

4. Development concept

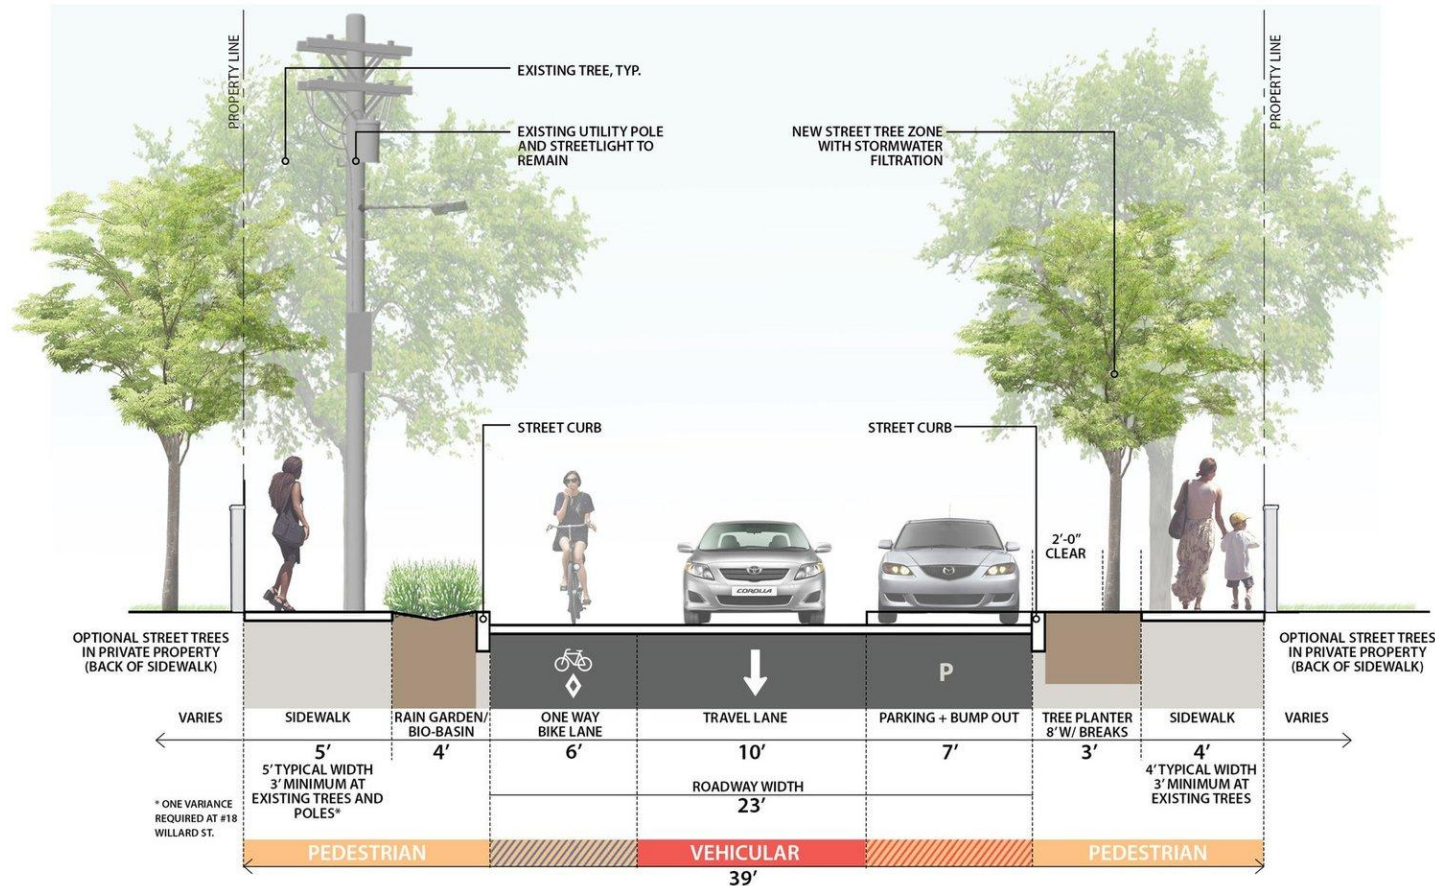

B. Permit processes and requirements

2. Master Plan Permit



Making a good application

4. Development concept

6. Urban design and public realm

i. Perspectives: Computer generated

- i. Aerial perspectives showing the development within its surrounding context.
- ii. Street -level perspectives of the main streets within the surrounding context.
- iii. Human-scale perspectives illustrating key locations and public spaces within the development.

B. Permit processes and requirements

2. Master Plan Permit



Making a good application

4. Development concept



B. Permit processes and requirements

2. Master Plan Permit



Making a good application

5. Environment and sustainability impact summary

a. Proposed Solutions: Narrative and illustrations

Describe the proposed **nature-based** and **sustainability** solutions adopted within the master plan, supported by illustrations where appropriate.

b. Environmental impact summary: Narrative and illustrations

(Target 2-3 A4 pages maximum)

Provide a summary of the anticipated environmental impacts and proposed mitigation measures, covering:

- i. Flora (including existing trees) and fauna
- ii. Air quality
- iii. Water resources
- iv. Soil
- v. Noise
- vi. Light pollution
- vii. Urban Heat Island effect
- viii. Construction impacts

B. Permit processes and requirements

2. Master Plan Permit



Making a good application

6. Transport impact summary

a. Overall transport demand and assumptions (trips/ parking KPIs)

- a. Trips
- b. Parking

b. Overall transport plan showing proposed external connections, sites, corridors and capacity

- a. Road hierarchy (with at/ above/ below grade identified)
- b. Access, junctions and connections
- c. Main public transit stops

c. Overall summary of proposal and any agreed changes (with justifications if needed)

- a. Bulleted narrative
- b. Plan showing location of proposals/ agreed changes with evidence from concerned authority (this includes any change to road cross sections)


B. Permit processes and requirements

2. Master Plan Permit



Making a good application

6. Transport impact summary

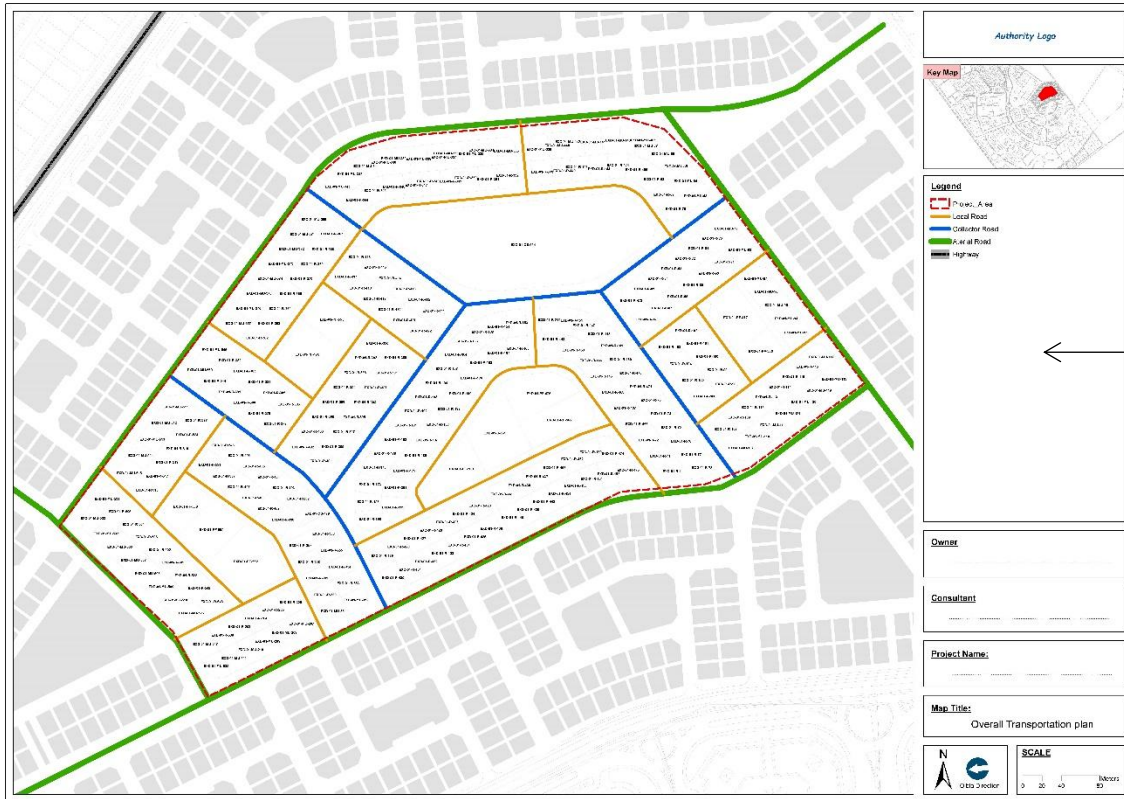

1. Overall transportation plan

Legend

Hierarchy

- Highway
- Arterial
- Collector
- Local road

Access

- Primary access
- Secondary restricted

Junctions

- Signalized at grade
- Signalized above grade
- Non-signalized at grade

Public transit points

- Metro
- Tram
- Bus
- Marine

Connections

- Bridges – pedestrian
- Tunnels – vehicular

Site

North point



Scale

B. Permit processes and requirements

2. Master Plan Permit



Making a good application

6. Transport impact summary

d. Public transit and mobility integration

- I. Public transit routes and circulation plan.
- II. Soft mobility network showing pedestrian and cycling routes, including shaded corridors.
- III. Isochrone plans (for public transit stops)

e. Parcel access plan (entry and exit points)

- I. Potential access/egress locations.
- II. Restricted streets
- III. Civil defense routes
- IV. Solid waste collection route

f. Parking Provision

- i. **On-parcel parking:** Surface, basement, podium, and shared parking.
- ii. **On-street parking,** where applicable


B. Permit processes and requirements

2. Master Plan Permit



Making a good application

6. Transport impact summary

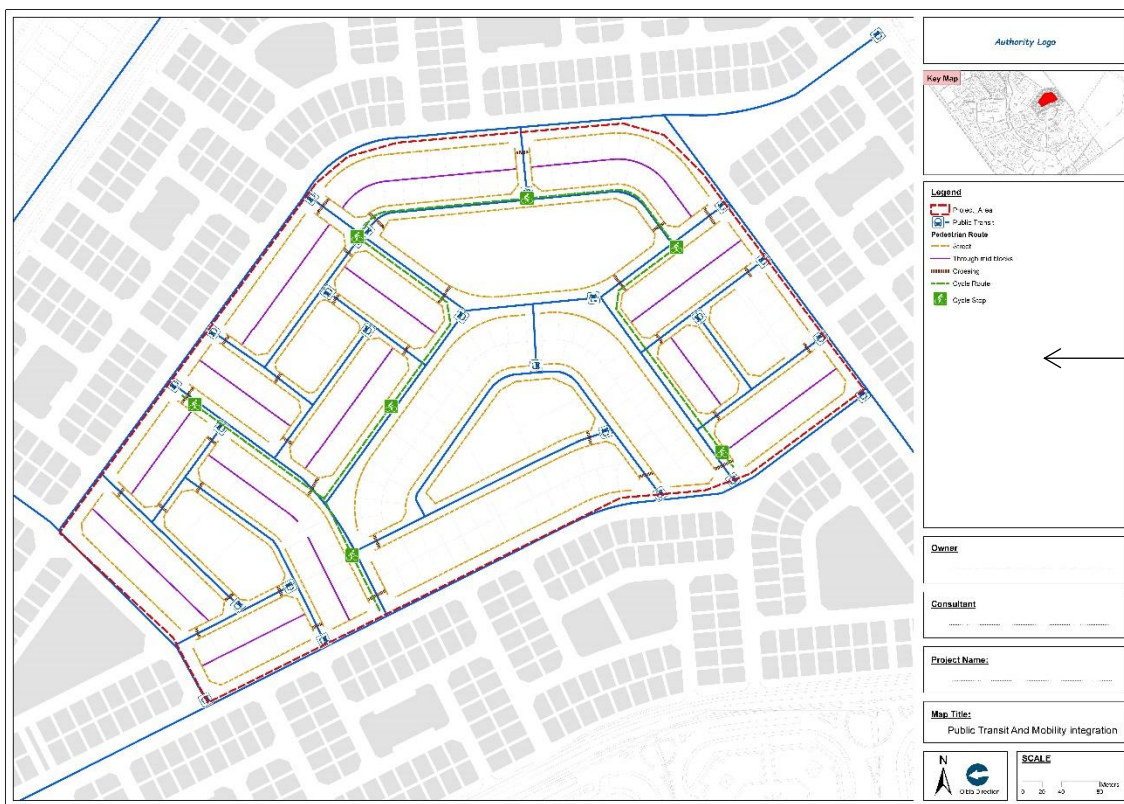

4. Public transit and mobility integration*

Legend

Pedestrian route

- Streets
- Through arcades
- Through mid blocks
- Bridge
- Crossing

Cycle routes

- Shared
- Dedicated
- Cycle stops
- Bridge
- Crossing

● Public transit stops

Isochrone (digital maps only)

- Gated community area
- Site
- North point
- Scale
- Qibla

*Public transit = Metro, Bus, Marine


B. Permit processes and requirements

2. Master Plan Permit



Making a good application

6. Transport impact summary

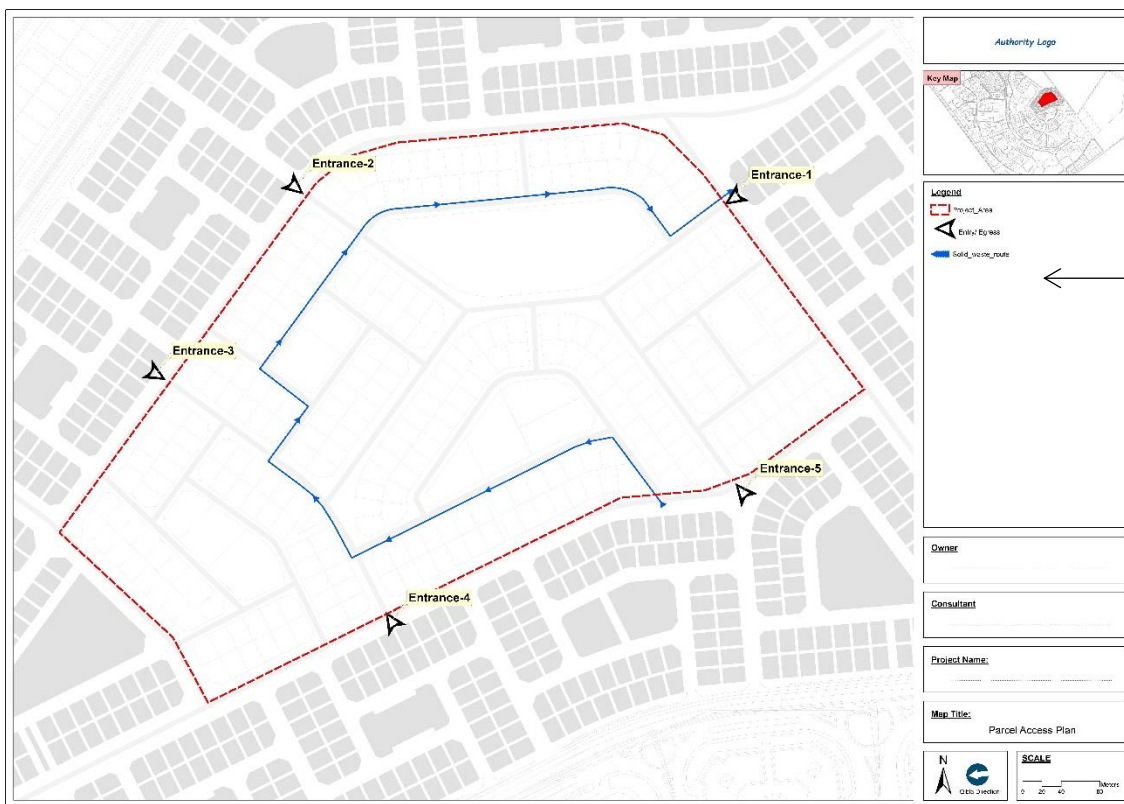

5. Parcel access plan

Legend

- Entry/ Egress
- Entry only
- Egress only
- ⊠ Restricted access edge

- Civil defence route
- Municipal waste collection route

- Site
- North point
- Qibla
- Scale


B. Permit processes and requirements

2. Master Plan Permit



Making a good application

6. Transport impact summary

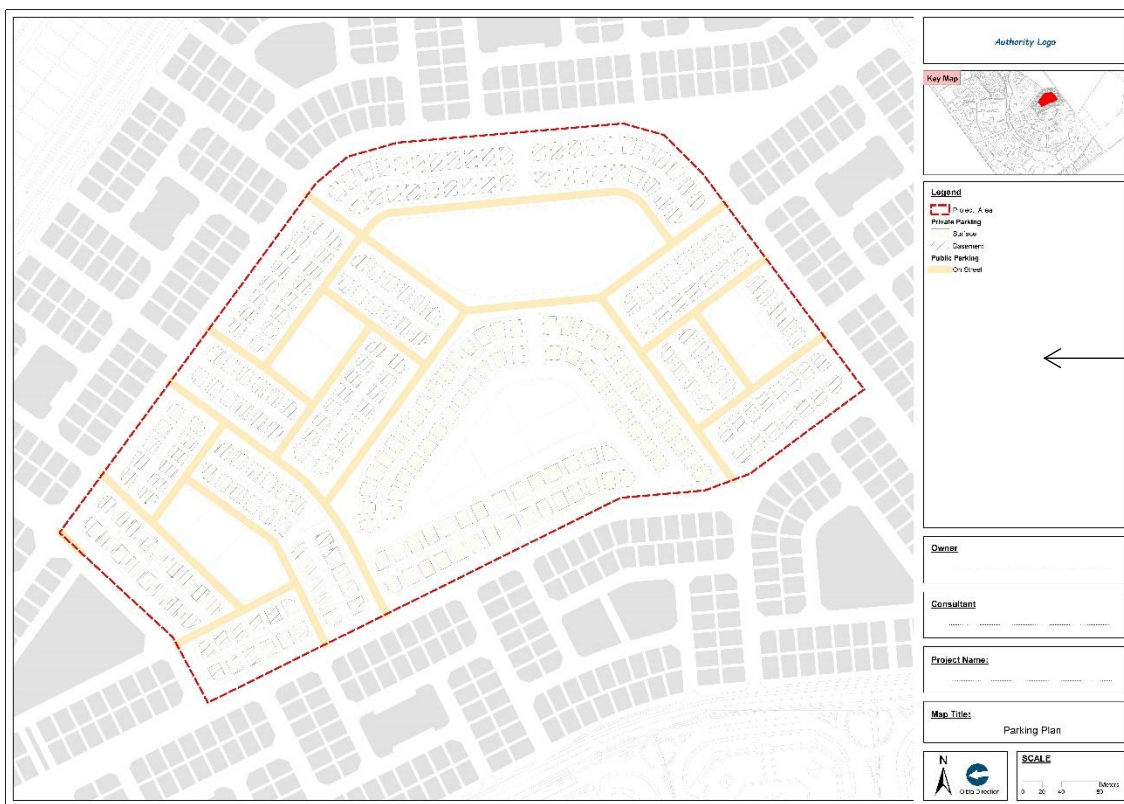

Parking Provision

Legend

Public	#
● On street	#
● Parking parcel	#
● Multi-storey	#

Private	#
● Surface	#
● Basement	#
● Podium	#

Total parking	#
---------------	---

— Site	
North point	Scale
Qibla	


B. Permit processes and requirements

2. Master Plan Permit



Making a good application

6. Transport impact summary

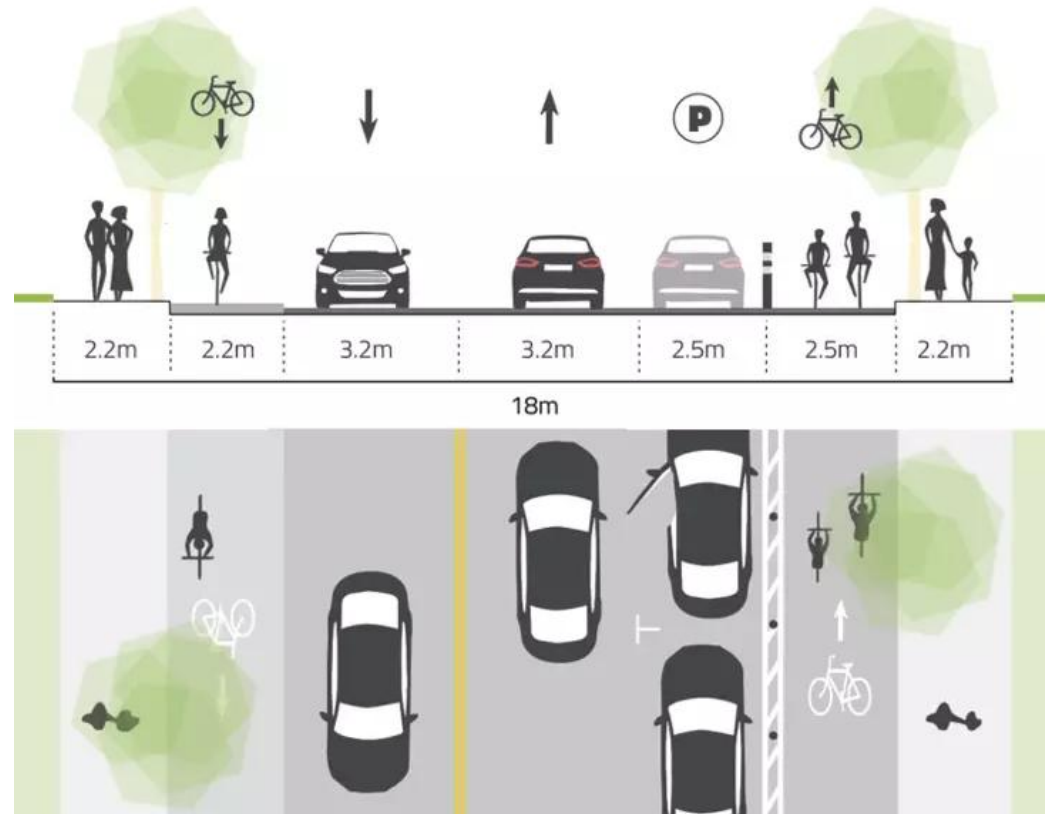

B. Permit processes and requirements

2. Master Plan Permit



Making a good application

7. Utilities summary

- a. **Overall utility demand and assumptions for each: Table**
 - i. By District and for each utility
 - ii. Any other appropriate utilities consumption metric/ KPI
- b. **Overall Utility plan: Drawing**
 - i. Show proposed sites, corridors and agreed easements
 - ii. Show main external tie-in point/s, if possible, without crowding the drawing
- c. **Overall summary of proposal any agreed changes**
 - i. Bulleted narrative.
 - ii. Plan showing location of proposals/ agreed changes.
- d. **Each Utility explained separately (See list in Notes)**
 - i. Approach to manage site's SWOT: Drawing
 - ii. Proposal and any agreed changes: Narrative
 - Developer justification
 - Evidence of agreement with Authority
 - iii. Utility assumptions, calculation method and estimated demand and : Table
 - iv. Site and network plan: Drawing
 - Proposed sites, corridors and agreed easements
 - Must show main external tie-in point/s


B. Permit processes and requirements

2. Master Plan Permit



Making a good application

7. Utilities summary

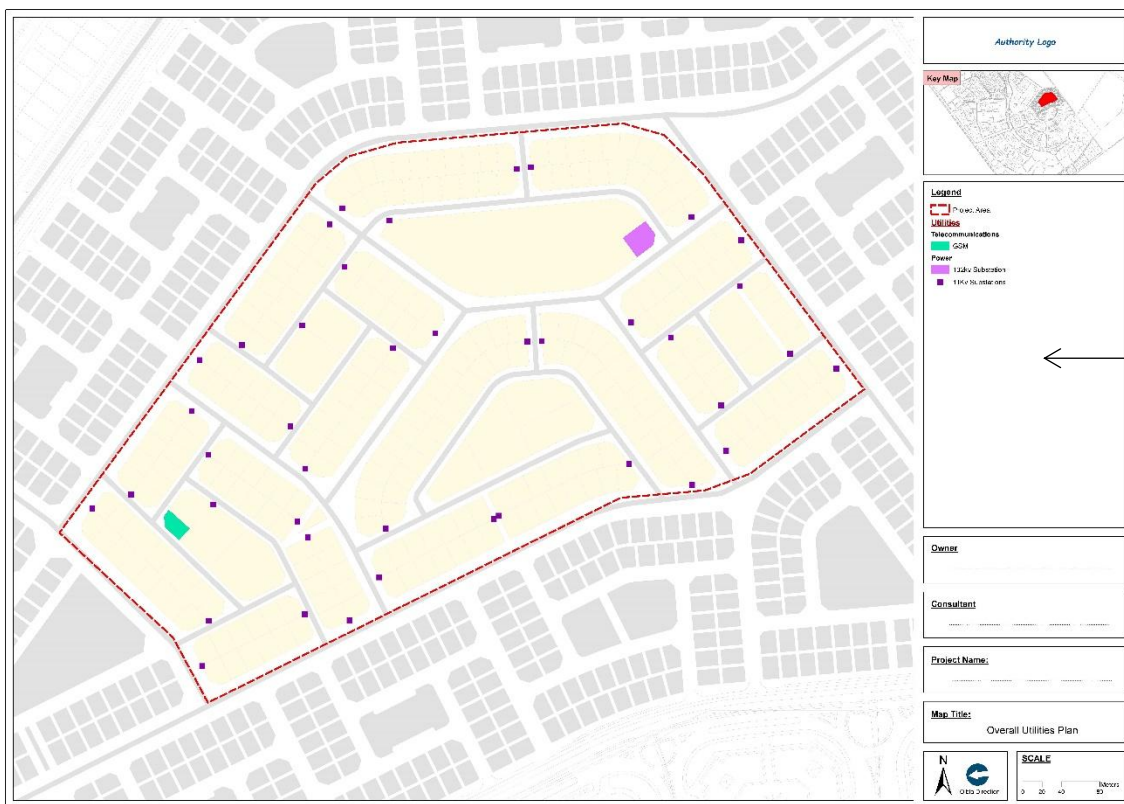

Overall utilities plan

Legend

Wet

● PW pump station # (XXsqm)

Dry

Power

● 132kv Substation # (XXsqm)

● 400kv corridor # (XXsqm)

Telecommunications

● MMR # (XXsqm)

● GSM Post # (XXsqm)

Other

● District cooling # (XXsqm)

Utility easements

Site

North point

Qibla

Scale


B. Permit processes and requirements

2. Master Plan Permit



Making a good application

7. Utilities summary

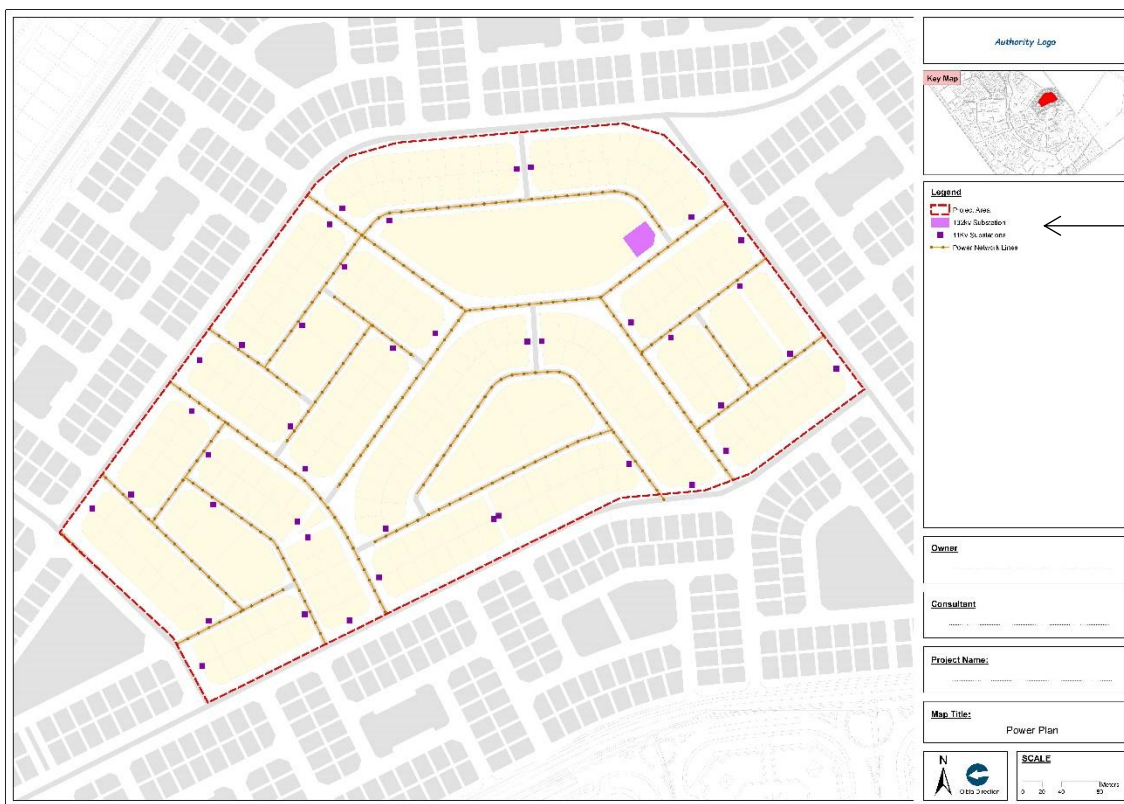

Power plan*

Legend

132kv substation	#	XXsqm
11kv substation	#	XXsqm
400kv corridor		XXsqm

Utility easements

Site

North point

Qibla

Scale

*Wet: Potable Water, Sewerage, Storm, Recycled water, Irrigation, Fire fighting
Dry: High/Medium/Low Voltage Power, Telecommunications, IT, CCTV
Other (if applicable): District cooling, gas

B. Permit processes and requirements

2. Master Plan Permit



Making a good application

8. Proposed implementation

a. Overall Phasing- Table

- i. Planning and population targets
- ii. Utilities demand per phase
- iii. Expected trips generated per phase

b. Overall Phasing plan- Drawings

Provide a master phasing plan illustrating the full development sequence.

c. Phasing Plans- Digital Drawings (only)

- i. Land use distribution by phase
- ii. Indicative temporary works and enabling infrastructure

d. Asset Ownership- Table

Provide a table identifying asset ownership by phase and category (e.g., public, private, authority-managed assets).


B. Permit processes and requirements

2. Master Plan Permit



Making a good application

8. Proposed implementation

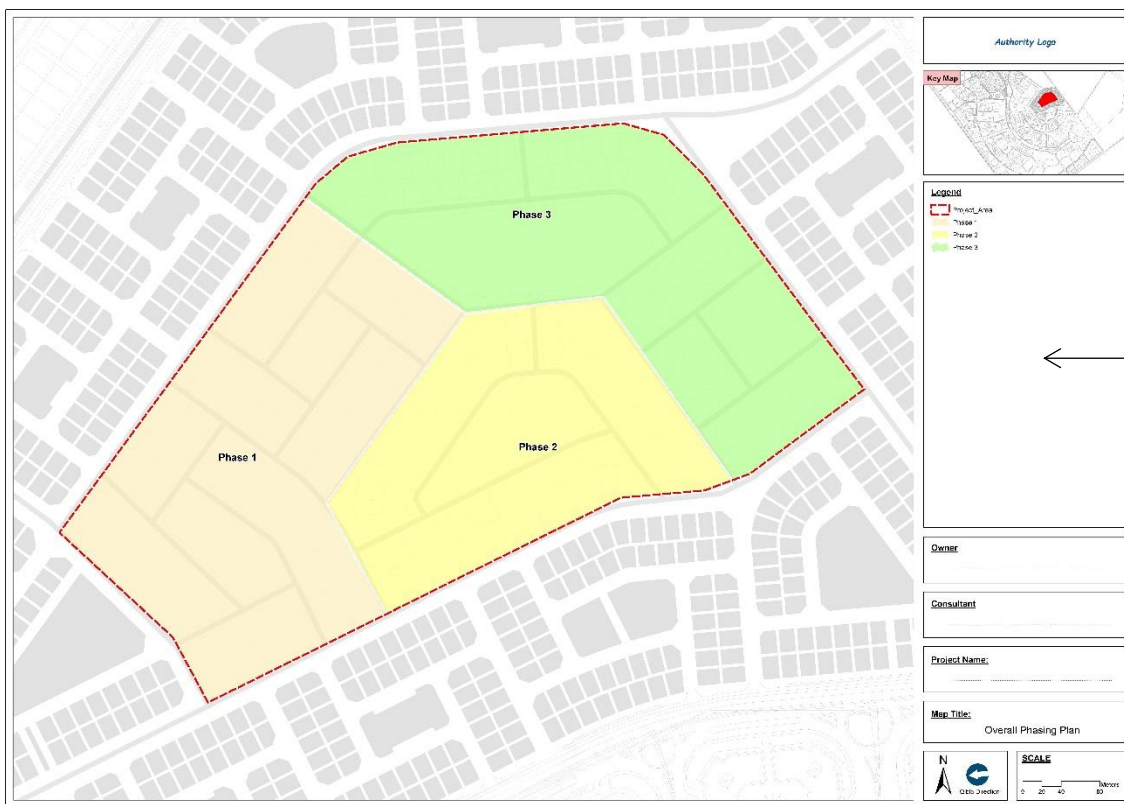

Overall phasing plan

Legend

Phase 1	XXsqm
— Key roads	
■ Key utilities sites	
Phase 2	XXsqm
— Key roads	
■ Key utilities sites	
Phase 3	XXsqm
— Key roads	
■ Key utilities sites	
Phase 4	XXsqm
— Key roads	
■ Key utilities sites	
— Site	Total area sqm
North point	Scale
Qibla	


B. Permit processes and requirements

2. Master Plan Permit



Making a good application

8. Proposed implementation

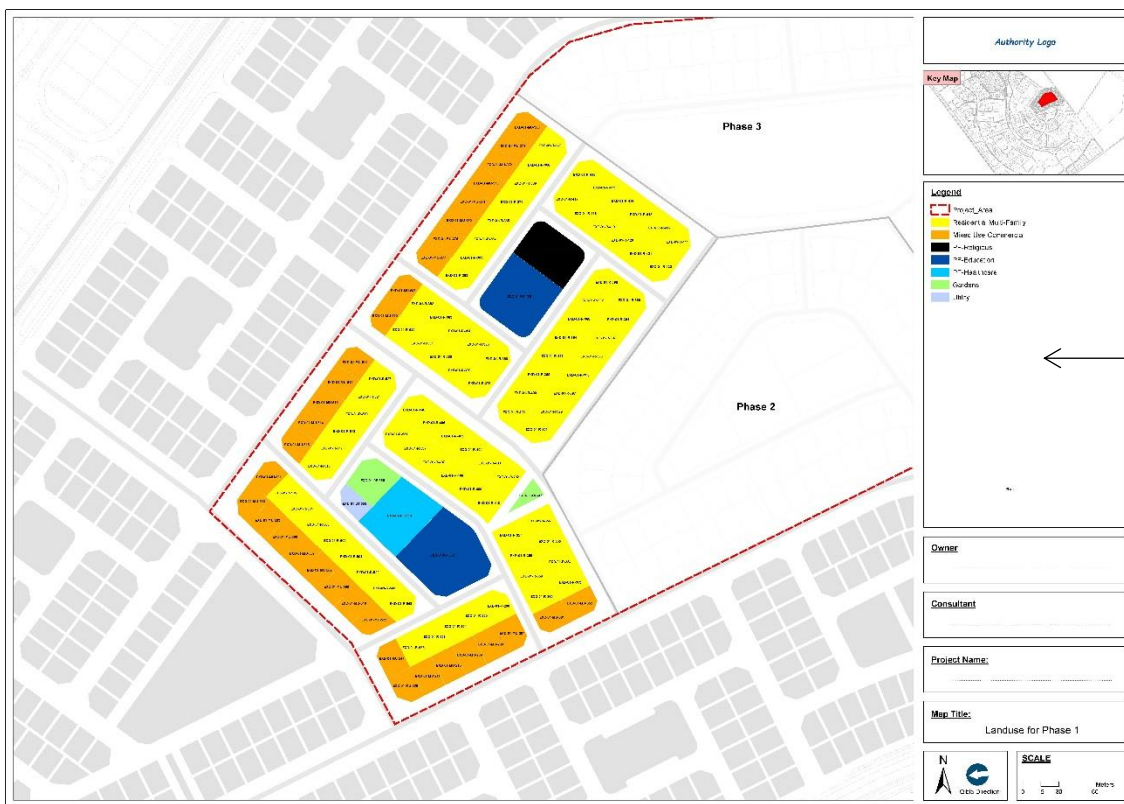

Land use Level 1 by phase plan*

Legend

Mixed Use	Land area sqm %
Residential	Land area sqm %
Recreation & Hospitality	Land area sqm %
Commercial	Land area sqm %
Public Facility	Land area sqm %
Agriculture	Land area sqm %
Open Space	Land area sqm %
Industrial	Land area sqm %
Transportation	Land area sqm %
Utility	Land area sqm %


— Site
North point
Qibla

Total area sqm
Scale

*Digital only

B. Permit processes and requirements

3. Planning Permit



When is this used?

A Planning Permit authorizes the implementation of development works based on:

- a. Modification to parcels forming part of an approved Master Plan Permit, provided that such works do not impact the approved Master Plan.
- b. Acceptance of existing conditions when no prior approval exists.

Context for real estate development

1. Minor modification to existing parcels of an existing master plan:


Minor modifications refer to changes within an approved master plan where the resulting population impact does not exceed **2,000 persons**, and may include changes to:

- a. **Parcel** configuration
- b. **Gross floor area (GFA)**
- c. **Planning regulations** (including permitting the existing condition)
- d. **Transportation**
- e. **Utilities** (power, water, sewage, recycled water, district cooling), including relocation or adjustment of utility parcels or reallocation of existing parcel areas for utilities purposes

Please see table on next page for details.

B. Permit processes and requirements

3. Planning Permit



Minor modifications table for master planned parcels

#	Definition
1.	Parcel configuration
a.	Merge or split
2.	Gross floor area (permanent or temporary)
a.	No change to total GFA but change to the land use distribution
b.	Change to total GFA with/ without change in land use distribution
c.	Change to committed affordable housing requirements
3.	Planning regulations and urban design
a.	Planning and design regulations for parcels <i>E.g. heights, setbacks, build to line, shading of open spaces etc.</i>
b.	Permitting the existing condition
4.	Transportation
a.	Change to number of primary access/ egress
b.	Change to easements
c.	Change to number of trips
5.	Utilities (Power, Water, Sewage, Recycled water, District cooling)
a.	Change to easements
6.	Phasing
a.	Change to project phasing (land area, GFA)
7.	Population
a.	Change to number of population limited to < 2000 persons

Important notes:

1. Impacts from the cumulative changes may trigger a Master Plan Permit for major modifications to a master plan for the master developer.
2. Any modification to an urban planning requirement related to 2040 will be subject to a Dubai Structure Plan 2040 Alignment review by DM.
3. Submission of an approved or commissioned impact study does not guarantee unconditional approval by the Planning authority.


Note:

PP is related to Cumulative changes calculation for the entire project/community limited to < 10% according to the following cases:


1. Multiple modifications on preapproved MP by Master Developer.
2. History of Cumulative changes from approval date of MP by Sub-Developer.

B. Permit processes and requirements

3. Planning Permit



Process flowchart – Real estate projects

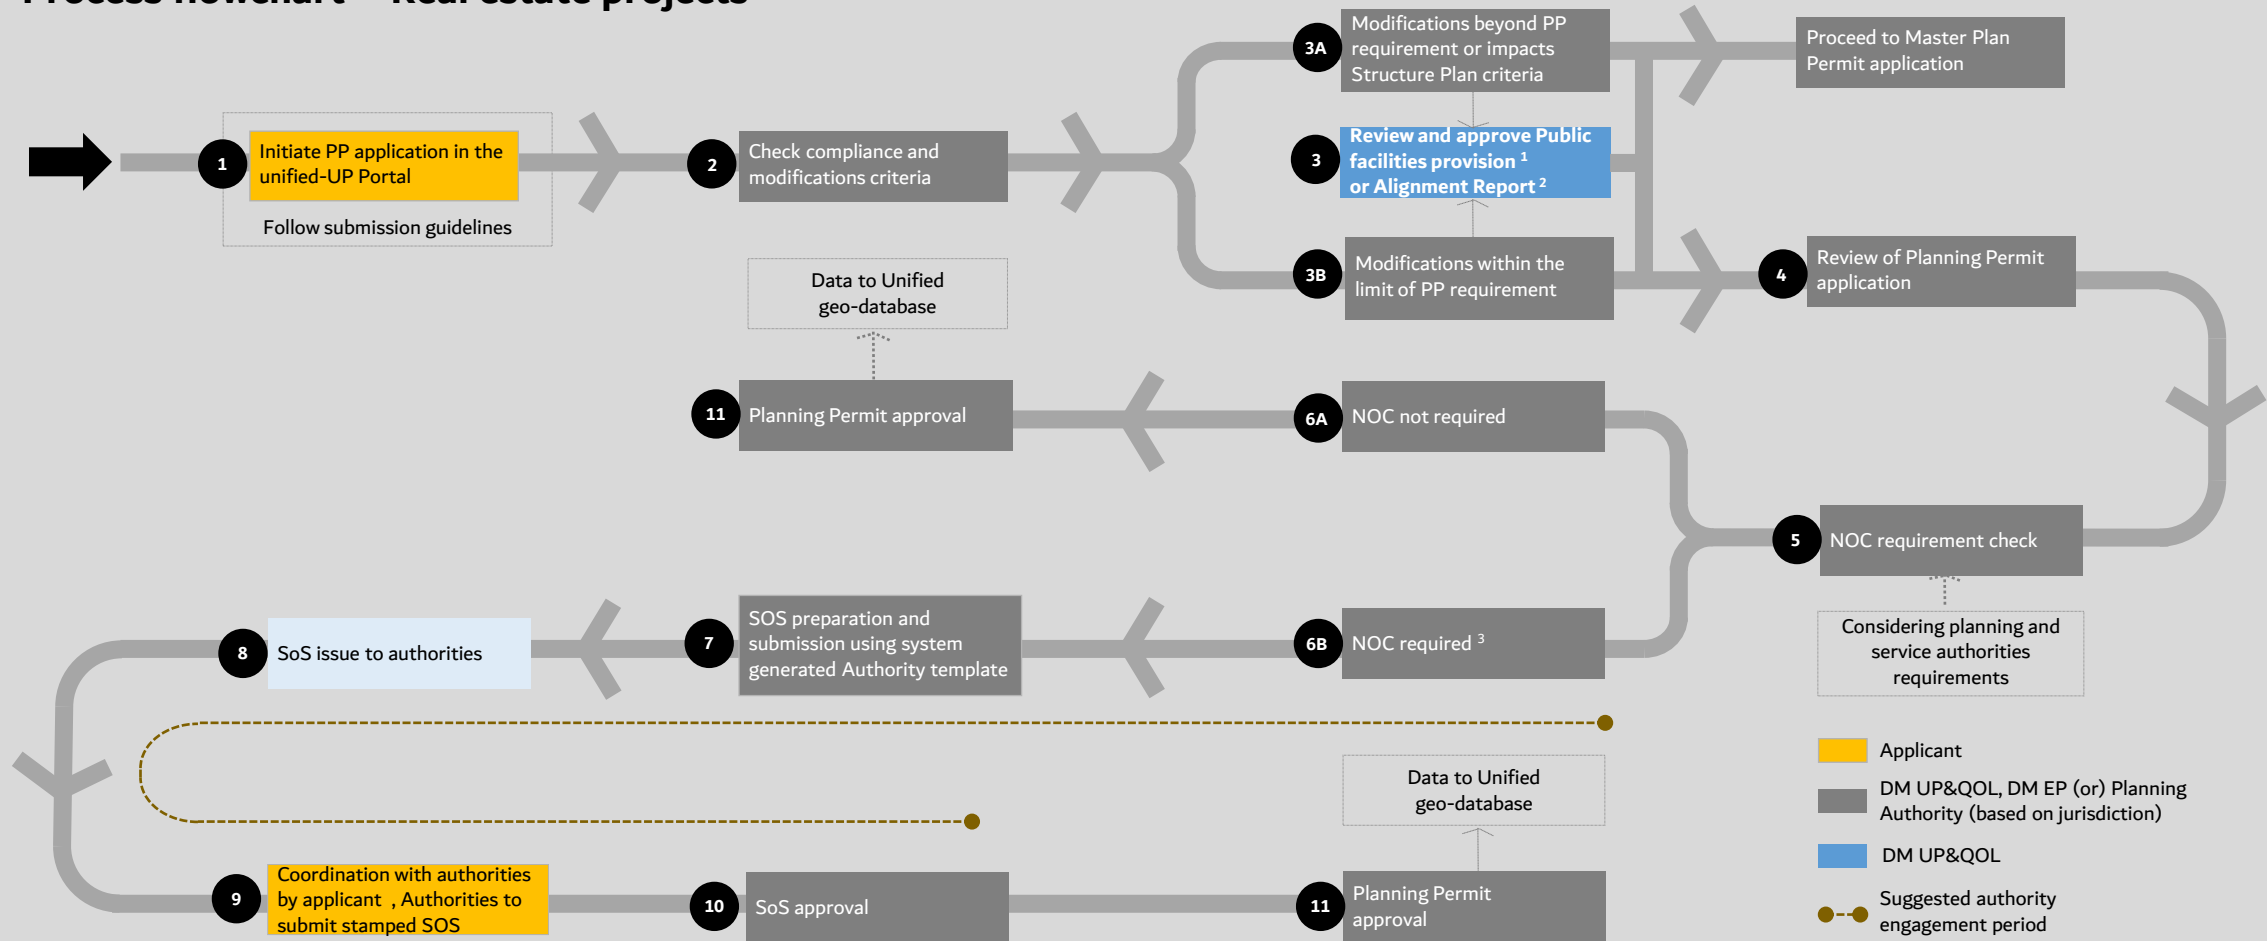

1. Responsibility of Master developer / Jurisdiction to share the submission to DM to ensure the full provision of public facilities. (Refer to page No. 21)
2. Verify Dubai 2040 alignment only where modifications deviate from pre-approved parameters.
3. NOC required either from all authorities or only from certain authorities, identified based on the requirements stipulated by different authorities

B. Permit processes and requirements

3. Planning Permit



Submission checklist

Planning permit checklist (R2.2, 30/03/2026)

1. The review process begins only when an applicant completes and submits this form, along with all the required items.
2. All provided material must be clear and concise providing the relevant information as requested.
3. Subject to revision, you may contact the issuer to confirm that this is the latest.

Application number and revision: _____ Date: _____

Master Developer name: _____ Development project name: _____
As applicable: _____

Parcel number/s: _____ Authorized contact: _____
Under DM case: _____ Name: _____

Contact details: _____ Contact phone number: _____
Email: _____ Phone number: _____

Section Item	PP		Requirements ¹		
	Sub	Master	N	M	T
1 Consultant details					
1.1 Consultant's agreement, Master Developer letter/s (if applicable)					✓
1.2 Consultant's Terms of Reference (ToR)					✓
2 Detail Inspection plan (DIP) Alignment (Submitted as a separate report by Master developer)					
2.1 Summary of consultant's modification approved by Master developer				✓	✓
a. Why the change was a forced Narrative and images				✓	✓
b. Master plan justification (if not in alignment)				✓	✓
c. Structure Plan Key performance indicators (KPIs) (Being, any other compliance)				✓	✓
d. Revised Master Plan Key performance indicators (KPIs) (Structural compliance)				✓	✓
e. Overall subdivision plan 1:1000/1:5000 all the changes				✓	✓
f. Overall revised master plan (L&D)				✓	✓
g. Overall Project budget high level and the changes in the master plan				✓	✓
2.2 Master Developer's Objectives Certificate (NOC) for the proposed changes				✓	✓
3 Amendment to the Development concept (Submitted as a separate report by Sub developer)					
3.1 Proposed modification of affected parcel/s				✓	✓
a. Summary of the modification/s				✓	✓
b. Subdivision plan showing affected areas				✓	✓
c. Overall and use plan				✓	✓
d. Detailed Project Budget (see form in M&S)				✓	✓
3.2 Urban design and public realm				✓	✓
a. Urban design strategies and conceptual plan				✓	✓
b. Building typology and height plan				✓	✓
c. Public realm and landscape conceptual plan				✓	✓
d. Skyline (in case of building height changes)				✓	✓
e. Building sections with annotations				✓	✓

¹ N - Narrative, T - Images, M - Maps, - 1:200
² Maps that may be combined in the report provided to be info must be clear. Each topic should be on their own GIS layer to facilitate review.

Transport impact summary

1. Transport demand and assumptions (trips/ parking KPIs)			
a. Trips			✓
b. Parking			✓
2. Overall transport related parcel plan showing connections, parking, pedestrian corridors			✓
a. Parcel entry / exits			
b. On-site parking (surface, basement, podium), allocated			
c. Permitted pedestrian connections			
3. Summary of overall proposal and any agreed changes (justifications if needed)			✓
a. Related narrative			✓
b. Plan of overall proposal/ agreed changes with evidence from concerned authority			✓
Utilities impact summary			
1. Utilities demand and assumptions (by utilities)			✓
a. Assumptions			✓
b. Demands			✓
2. Overall utilities related parcel plan showing connections, easement			✓
a. Utility connections			
b. Easements (if any)			
3. Summary of overall utilities related parcel plan showing proposal and any agreed changes			✓
a. Related narrative			✓
b. Plan showing location of proposal/ agreed changes with evidence from concerned authority			✓

¹ N - Narrative, T - Images, M - Maps, - 1:200
² Maps that may be combined in the report provided to be info must be clear. Each topic should be on their own GIS layer to facilitate review.

Notes

1. All plans/ maps and tables should correlate and cross reference each other.
2. Images may be combined, provided the information is clear and easy to use.
However, a report must be available on appropriate GIS layers to facilitate individual review.

2. Transport includes:
Vehicle: public transport
Sustainable: pedestrian, cycling
Marine (if applicable)
Reservoir operations: Civil defence, delivery, solid waste, restricted/ public areas etc.

3. Utilities include:
Water: Potable Water, Sewerage, Storm, Recycled water, Irrigation, Fire fighting
Gas: High/Medium/Low Voltage Power, Telecommunications, IT, CCTV
Other (if applicable): District cooling, gas

Appendix

1. Consultation report
A summary of meetings held with authorities to achieve NOCs based on the approved master plan/ policies.
Note should contain proposals/ issues, resolutions/ justification and final NOC.
Division of NOCs received (should be available DIGITALLY in the system)

2. GIS (Geo-referenced to DLTN, aligned to Spatial Geodatabase attributes)

Sub-Set has delivery
SHP: All other subdivision's all planning attributes
SHP: Proposed subdivision's with planning attributes
SHP: All transport and mobility networks with attributes
SHP: All utilities and network with attributes
SHP: All open spaces with attributes
SHP: All public facilities with attributes
SHP: All urban design and planning regulations
SHP: Planning plan or all assets/ land use with attributes

3. Detailed Project Budget
All calculations should be dynamic with formulas and should link to the GIS

4. Studies/Assessments by recognized consultants (present each as an Executive Summary)

A. Socio-economic impacts and market impact (including housing)
B. Transport impact
C. Environmental impact
D. Marine impact
E. Heritage impact
F. JCH
G. Others as relevant
H. Public hearing survey (optional, on a case-by-case basis)
I. Noise and Vibration Impact study and zoning study
J. Worker housing, Design typologies and zoning study

Key notes:

1. Required for the submission by applicant Not required for the submission To be kept updated by master developer in case of review by the Planning Authority
2. Supporting documents: Additional studies prepared by professionals may be requested to support aspects of your application.
3. Propriety specifications: Not recommended unless you are executing a complex master plan

File: UPP - Checklist - Planning permits - R2.2.pdf

B. Permit processes and requirements

3. Planning Permit



Making a good application

2. Dubai Structure Plan 2040 Alignment (by Master developer)

The Master developer must maintain the following material in an up-to-date format, as they may be requested at any time by Planning Authority as evidence of their internal review when providing the NOC to the parcel owner who has made the application.

1. Summary of Cumulative Modifications Approved

a. Justification for Changes – Narrative and Illustrations

Explain clearly and simply, using bullet points how the proposed changes in the master plan take advantage of or mitigate against each of the factors identified in the reasons for the change.

2. Master Plan Justification (if not aligned)

Provide a clear justification for the updated master plan, supported by relevant studies, demonstrating alignment with the objectives of the Dubai Structure Plan.

a. Structure plan KPI: Table

Provide a KPI table demonstrating compliance with the Structure Plan, highlighting improvements in key indicators.

b. Revised Master Plan KPI: Table

Indicator performance of the current Master plan highlighting improvement to previous master plan KPIs.

Where possible provide a comparison with known benchmarked targets to showcase the Master plan's new performance.

B. Permit processes and requirements

3. Planning Permit



Making a good application

2. Dubai Structure Plan 2040 Alignment (by Master developer)


b. Summary of Proposed Cumulative Modifications

- i. Overall subdivision indicating the type of cumulative changes made to the master plan: Map
 - Parcel configuration
 - GFA and land use
 - Planning regulations and urban design
 - Transportation
 - Utilities
- ii. Overall revised master plan (LU2): Map

c. Master Developer NOC for the parcel changes- Official letter


B. Permit processes and requirements

3. Planning Permit



Making a good application

2. Dubai Structure Plan 2040 Alignment (by Master developer)

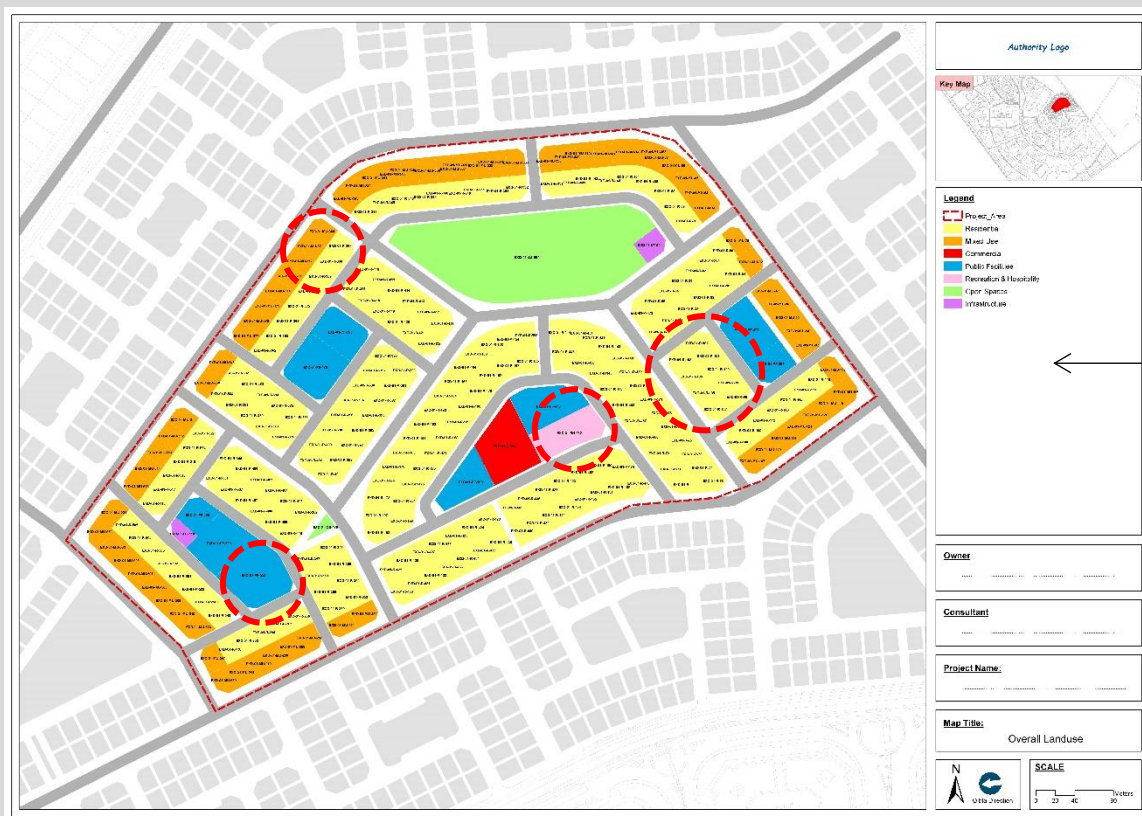

Cumulative changes to the master plan

Legend

Parcel configuration

☐ Merged

GFA and land use

☐ Increased GFA, same land use split

☐ Increased GFA, different land use split

Planning regulations and urban design

☐ Increased building heights

☐ Reduced setbacks

Transportation

☐ Parcel entry moved

☐ Parcel entry added

— Public cycle through route added

Utilities


☐ Utilities easement added

— Site
North point
Qibla

Total area sqm
Scale


B. Permit processes and requirements

3. Planning Permit



Making a good application

2. Dubai Structure Plan 2040 Alignment (by Master developer)

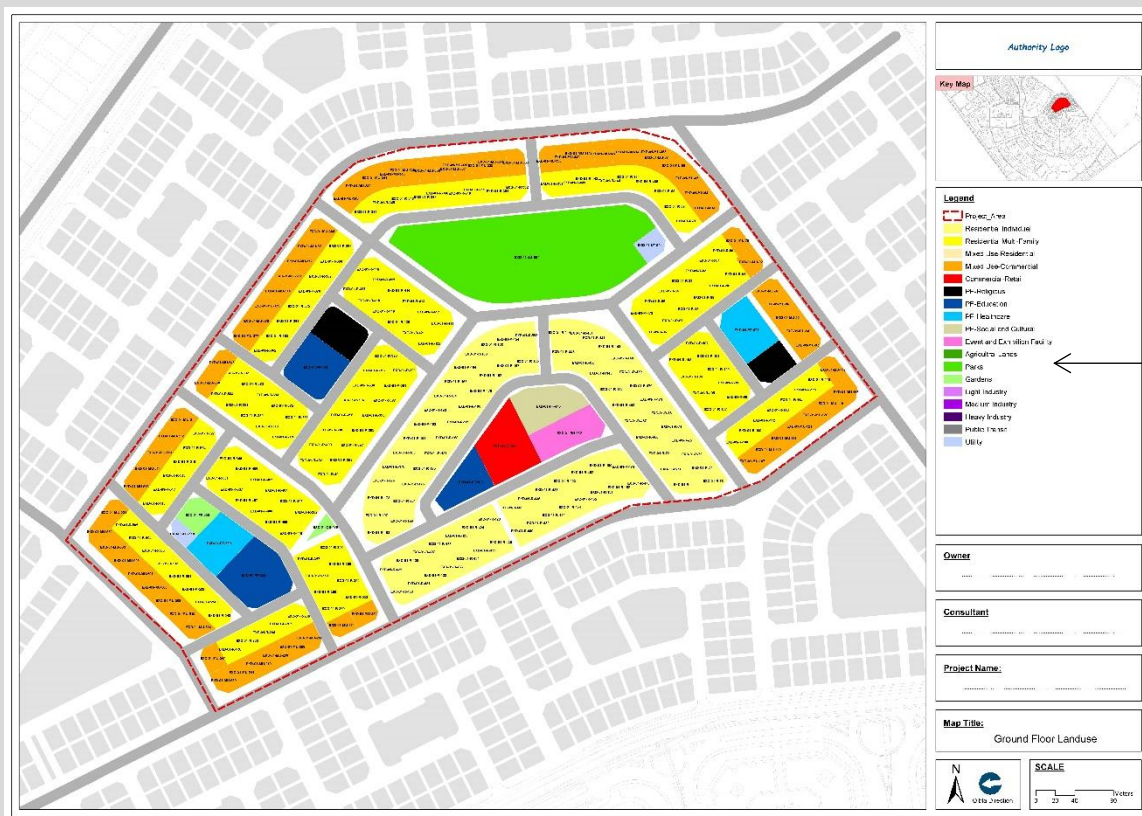

Overall Land use (Level 2)

Legend

Mixed Use

- Mixed Residential
- Mixed Commercial

Residential

- Individual
- Multi-Family

Recreation & Hospitality

- Event and Exhibition Facility

Commercial

- Retail
- Shopping center
- Mall

Public Facility

- Religious
- Education
- Security
- Civil Defense
- Ambulance
- Entertainment
- Municipality
- Healthcare
- Social and Cultural

Land area sqm %

Land area sqm %

Land area sqm %

Land area sqm %

Land area sqm %

Overall Land use (Level 2)

Legend

Mixed Use

- Mixed Residential

Transportation


- Public Transit

Utility

- Sub-station

Site

North point



Qibla

Land area sqm %

Land area sqm %

Land area sqm %

Total area sqm

Scale



Making a good application

2. Dubai Structure Plan 2040 Alignment (by Master Developer)

d. Summary of the Proposed Cumulative Modifications

i. Overall Project Budget – Table

Provide a consolidated table summarizing the overall project budget, highlighting all financial implications of the proposed master plan modifications.

ii. Detailed Project Budget – Revised Master Plan

Provide a detailed breakdown of the updated project budget reflecting all changes introduced in the revised master plan.

iii. Master Plan Register

Provide a comprehensive master plan register detailing all changes at parcel level, including:

- Parcel reference and location
- Nature of modification
- Associated Planning Permit reference(s)
- Summary of change per parcel (e.g., land use, GFA, configuration, regulations)

Land use and population budget

Master plan data																											Proposed Building data							Infrastructure strategic planning data													Other																									
			Landuse Category			GFA Category		Building Height							Setbacks							Development data					Population data					Parking data					Utility demand							Misc. Data																												
Parcel ID	Center	Parcel Area	LU Level 1	LU Level 2	Split by LU	FAR	Total GFA	Split by LU	Total	Total	Podium	Podium	Tower/	Tower/	Basement	Basement	Podium	Podium	Podium	Podium	Tower/	Tower/	Tower/	Tower/	Plot	Number of	Area of	Proposed	Proposed	Total units	Units split by	Affordable	Max	Max	Max	Underground	On surface	Above	Total	Parking	Power	Potable	Sewage	Drainage	Irrigation	Gas	Renewable	Predominant	Proposed																							
			(LU1)	(LU2)	Level 3 (LU3-1, 2, 3, 4,...)		Level 3 (GFA LU3-1, 2,3,4,...)		(floors)	height	(floors)	building height	building (floors)	height	(floors)	side 1	side 2	side 3	side 4	building side 1	building side 2	building side 3	building side 4	coverage	buildings	green space	development phase	development year		LU Level 3 (Units LU3-1, 2,3,4,...)	housing unit split	residents	Employees	Visitors	area	area	surface area	Space	split	demand	water	m3	m3	m3	m3	BTU	energy	building material	asset owner																							
#		sqm					sqm	sqm	m	#	m	#	m	#	m	m	m	m	m	m	m	m	m	m	%	#	sqm	#	#	#	#	#	#	#	#	sqm	sqm	sqm	sqm	#	kVa	m3	m3	m3	m3	BTU	kVa																									

B. Permit processes and requirements

3. Planning Permit



Making a good application


3. Amendment to the Development concept (by Sub-developer)

a. Proposed Modification of affected parcel/s (Before and After)

- i. Summary of the modification/s: Narrative
- ii. Subdivision plan showing affected areas: Map
- iii. Overall land use plan (LU2): Map

B. Permit processes and requirements

3. Planning Permit



Making a good application

3. Amendment to the Development concept (by Sub-developer)

Affected areas of the parcel BEFORE

Logos

Affected areas of the parcel Before

Legend

- Parcel configuration
- GFA and land use
- Planning regulations and urban design
- Transportation
- Utilities

— Site
North point
Qibla

Table: APPROVED HOUSING UNITS

VILLAS	TOWNHOUSES	APARTMENTS

Table: APPROVED POPULATION DATA

EMPLOYEES	VISITORS	RESIDENTS

Table: GENERAL INFORMATION

PROJECT NAME	ALLOT NO.	DEVELOPER	ALLOT AREA / SQM	TOTAL AREA / SQM

Table: APPROVED LAND USE BUDGET

LAND USE	AREA / SQM	AREA / SQM	PERCENTAGE

Table: APPROVED ZONING PLANS

Plot No.	Land use	Area / SqM	Height	Setback	Front	Rear	Sides	Parking	Remarks

• ALL FILES SHOULD BE IN MICROSTATION FORMAT (DTM) AND 2 DIMENSIONS.
• ALL TABLES SHOULD BE IN TEXT ELEMENT (NOT IMAGE)

Affected areas of the parcel Before

Legend

- Parcel configuration
- GFA and land use
- Planning regulations and urban design
- Transportation
- Utilities

— Site
North point
Qibla

Total area sqm
Scale



Affected areas of the parcel AFTER

Logos

Affected areas of the parcel After

Legend

- Parcel configuration
- GFA and land use
- Planning regulations and urban design
- Transportation
- Utilities

— Site
North point
Qibla

Table: PROPOSED HOUSING UNITS

VILLAS	TOWNHOUSES	APARTMENTS

Table: PROPOSED POPULATION DATA

EMPLOYEES	VISITORS	RESIDENTS

Table: GENERAL INFORMATION

PROJECT NAME	ALLOT NO.	DEVELOPER	ALLOT AREA / SQM	TOTAL AREA / SQM

Table: PROPOSED LAND USE BUDGET

LAND USE	AREA / SQM	AREA / SQM	PERCENTAGE

Table: PROPOSED ZONING PLANS

Plot No.	Land use	Area / SqM	Height	Setback	Front	Rear	Sides	Parking	Remarks

• ALL FILES SHOULD BE IN MICROSTATION FORMAT (DTM) AND 2 DIMENSIONS.
• ALL TABLES SHOULD BE IN TEXT ELEMENT (NOT IMAGE)


Affected areas of the parcel After

Legend

- Parcel configuration
- GFA and land use
- Planning regulations and urban design
- Transportation
- Utilities

— Site
North point
Qibla


Total area sqm
Scale



Making a good application

3. Amendment to the Development concept (by Sub-developer)

Overall land use plan (LU2) BEFORE

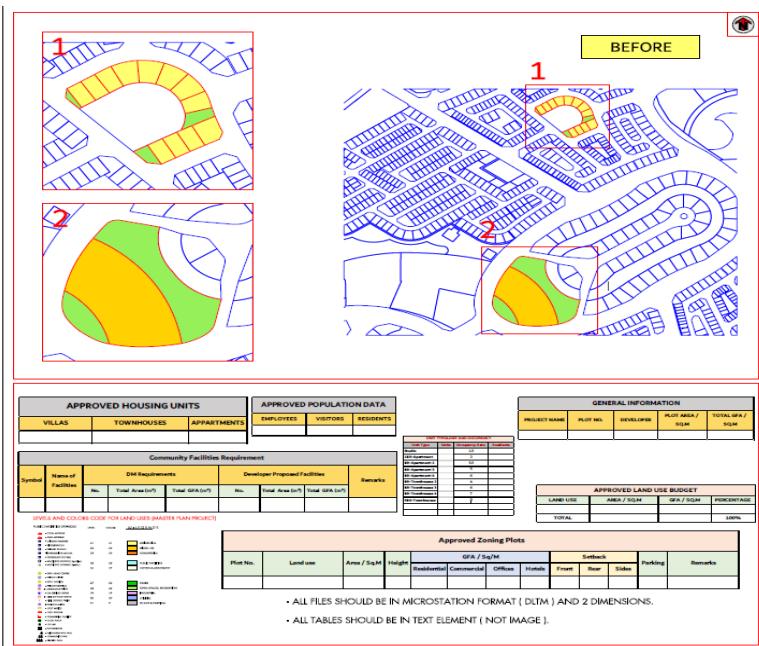

Logos

Key Map

Plots/Landuse

Residential

- Residential Individual
- Residential Multi-Family

Mixed Use

- Mixed Use-Residential
- Mixed Use-Commercial

Commercial

- Commercial-Retail

Public Facilities

- W/F-Heritage
- P/F-Education
- P/F-Healthcare
- P/F-Social and Culture

Recreation & Hospitality

- Event and Exhibition Facility

Agriculture

- Agricultural Lands

Open Spaces

- Parks
- Cemeteries

Industrial

- Light Industry
- MEDIUM Industry
- Heavy Industry

Transportation

- Auto Transit

Infrastructure


- Utilities

Owner


Consultant

Project Name:

Map Title:



Overall land use plan (LU2) AFTER

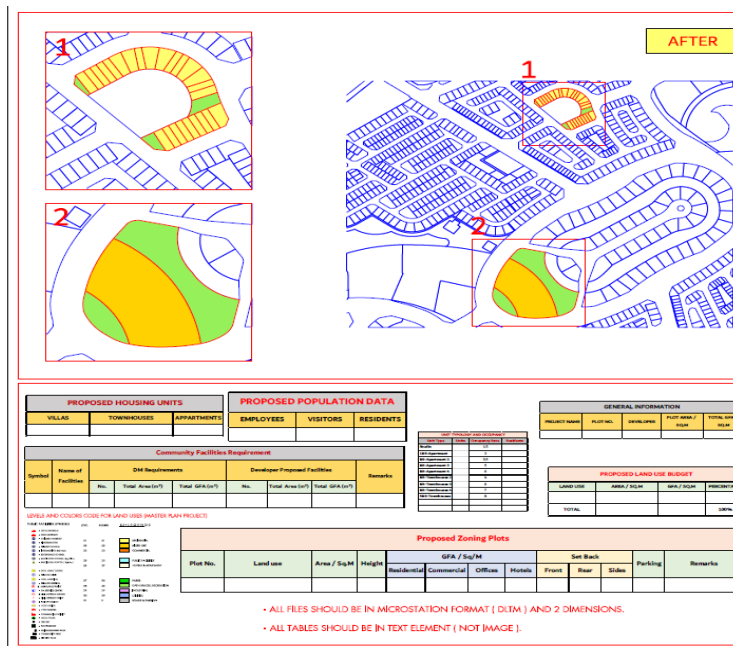

Logos

Key Map

Phyto. Land Use

Residential

- Residential Individual
- Residential Multi-Family

Mixed Use

- Mixed Use-Residential
- Mixed Use-Commercial

Commercial

- Commercial-Retail

Public Facilities

- P-F: Religious
- P-F: Education
- P-F: Healthcare
- P-F: Social and Cultural
- P-F: Hospitality
- P-F: Event and Exhibition Facility

Agriculture

- Agricultural Lands

Open Spaces

- Parks
- Gardens

Industrial

- Light Industry
- Medium Industry
- Heavy Industry

Transportation

- P: Public Transit

Infrastructure

- Utility

Owner	
-------	--

Consultant	
------------	--

Project Name:

Map Title:



B. Permit processes and requirements

3. Planning Permit



Making a good application

3. Amendment to the Development concept (by Sub-developer)

1) Development concept

a. Detailed Project Budget (see format in XLSX): Table

- Provide the detailed project budget in the prescribed Excel format, including:
- Full breakdown of all cost components as per the updated master plan.

i. Before and After Comparison – All Parcels

Provide a comparative table showing:

- Parcel details **before and after modification**
- Changes in land use, GFA, and key planning parameters
- Summary of impact per parcel

ii. Updated Parcel Regulations

Provide an updated schedule of parcel regulations reflecting:

- Revised land use controls
- Updated GFA limits
- Planning and development parameters per parcel
- Any applicable regulatory amendments resulting from the modifications

Land use and population budget

Master plan data																								
Landuse Category					GFA Category					Building Height										Setbacks				
Parcel ID	Center	Parcel Area	LU Level 1	LU Level 2	Split by LU	FAR	Total GFA	Split by LU	Total	Podium	Podium	Tower/	Tower/	Basement	Basement	Podium	Podium	Podium	Podium	Tower/	Tower/	Tower/	Tower/	Plot
			(LU1)	(LU2)	Level 3 (LU3-1, 2, 3, 4...)		Level 3	Level 3	Total	height	height	building	building	height	(floors)	side 1	side 2	side 3	side 4	building	building	building	building	coverage
#		sqm					sqm	sqm	m	#	m	#	m	#	m	m	m	m	m	m	m	m	m	%

B. Permit processes and requirements

3. Planning Permit



Making a good application

3. Amendment to the Development concept (by Sub-developer)

2) Urban design and public realm

- a. Urban design strategies and concept plan- Map
- b. Building typology and heights plan- Map
- c. Public realm and landscape strategies and concept plan- Map
- d. Building sections with annotations- Illustration

Notes:

Drawings 2 a, b, c may be combined as one map if the information is easy to read.


B. Permit processes and requirements

3. Planning Permit



Making a good application

4. Development concept

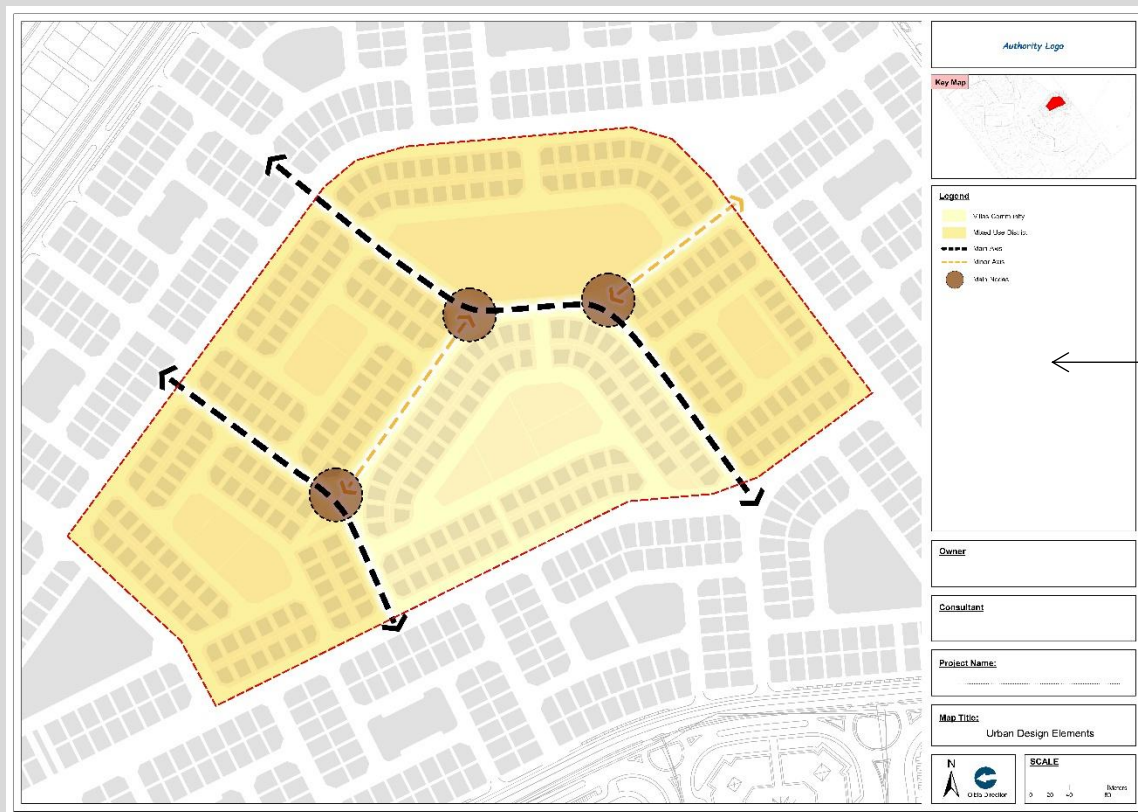

Urban design strategies and concept plan (updates)

Legend

Urban design elements

- Character areas
- Nodes/ Landmarks
- Public art, key wayfinding

Building

- Setback
- Build-to line
- Arcades and shading XXm XX%
- ① Min height
- ① Max heights

Podium

- Setback
- Build-to line
- Arcades and shading XXm XX%
- ① Min Heights
- ① Max Heights

Public realm

- Common drop off
- Public plaza
- Shared sikka

- Site
- North point
- Qibla
- Scale

B. Permit processes and requirements

3. Planning Permit



Making a good application

5. Transport impact summary

a. Transport demand and assumptions (Trips/ Parking KPIs)- Table

- i. Trips
- ii. Parking

b. Overall Transport -Related Parcel Plan Showing connections, parking, pedestrian corridors- Map

- i. Connections: Access and egress points for all parcels
- ii. Parking locations (surface, podium, basement, shared)
- iii. Pedestrian and cycling corridors and linkages

c. Summary of Overall Proposal and Agreed Changes - Narrative and maps

- i. Narrative (Bullet Points)
- ii. Supporting Maps: Plan showing proposals/ agreed changes with evidence from concerned authority

Notes:

Drawings 2 a, b, c may be combined as one map if the information is easy to read.


B. Permit processes and requirements

3. Planning Permit



Making a good application

5. Transport impact summary

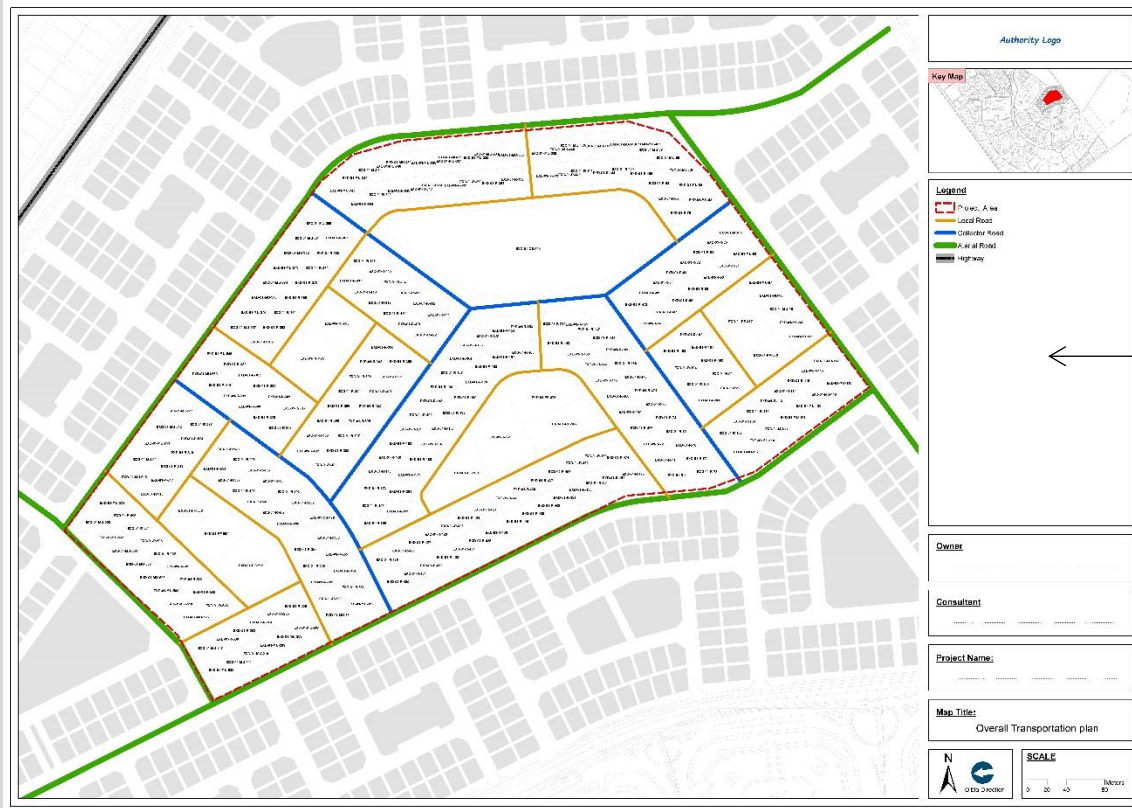

Overall transport related parcel plan (updates)

Legend

Access

- Entry/ Egress
- Entry only or Egress only
- ⊠ Restricted access edge
- Civil defense route
- Municipal waste collection

- On parcel parking #
- ① Surface #
 - ① Basement #
 - ① Podium #

- Pedestrian route
- Through arcades
 - Through mid blocks
 - Shared bridge


- Cycle routes
- Shared
 - Cycle stops

- Planned Public transit stops (metro, bus, tram, marine)

- Site
- North point
- Qibla
- Scale

B. Permit processes and requirements

3. Planning Permit



Making a good application

6. Utilities impact summary

a. Utilities Demand and Assumptions (by utilities)- Table

- i. Key assumptions for each utility (water, electricity, sewage, recycled water, district cooling, telecom, etc.)
- ii. Demand calculations per utility

b. Overall utilities Related Parcel Plan- Map

- i. Utility connections
- ii. Easements (if any)

c. Summary of Utilities Parcel Plan and Agreed Changes- Narrative and maps

- i. Narrative (Bullet Points)
- ii. Supporting Maps: Provide plans illustrating Proposed showing utilities layout and infrastructure strategy, approved/agreed modifications supported by authority evidence, Utility integration with land use and phasing strategy


B. Permit processes and requirements

3. Planning Permit



Making a good application

7. Utilities summary

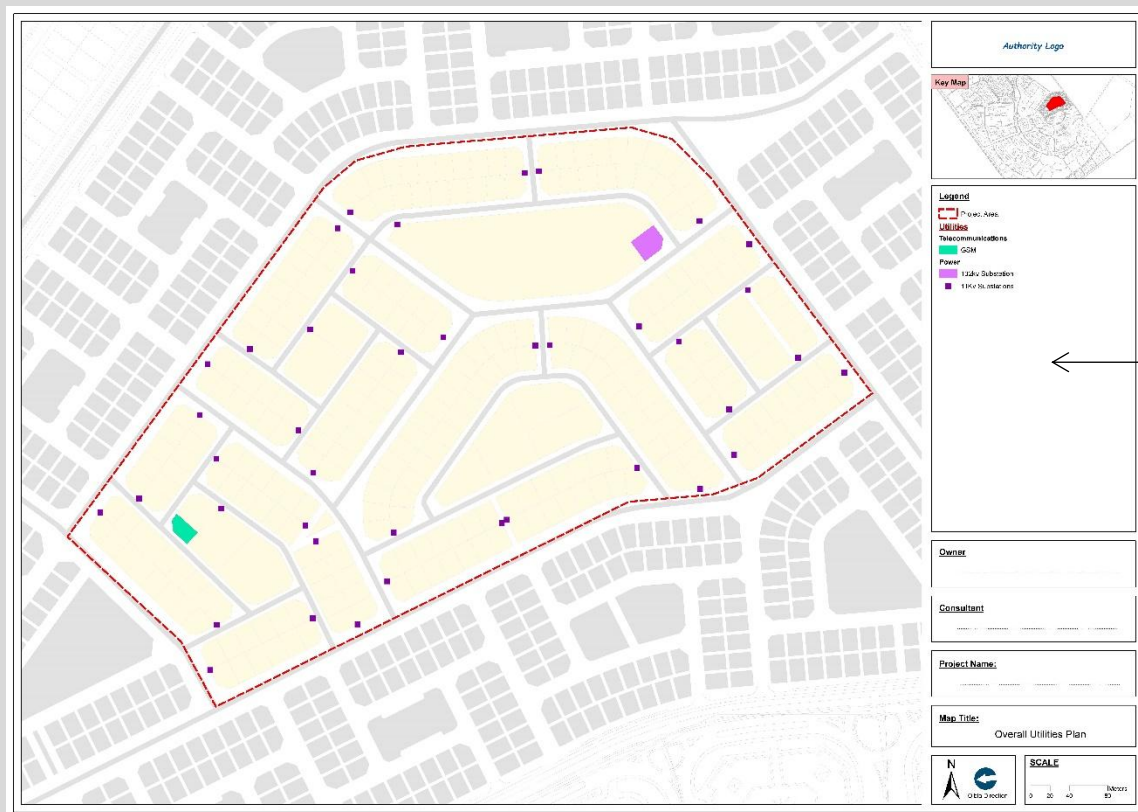

Overall utilities plan

Legend

Wet

- PW pump station # (XXsqm)

Dry

Power

- 132kv Substation # (XXsqm)
- 400kv corridor # (XXsqm)

Telecommunications

- MMR # (XXsqm)
- GSM Post # (XXsqm)

Other

- District cooling # (XXsqm)

Utility easements

- Site
- North point
- Qibla

Scale

B. Permit processes and requirements

4. General Planning Permit



When is this used?

A **General Planning Permit** authorizes the implementation of pre-approved types of development works for:

a. All land parcels,

or

a. Selected land parcels

in accordance with the requirements prescribed by Dubai Municipality (DM), and without the need to obtain a Master Plan Permit or a Planning Permit.

Context for real estate development

The General Planning Permit exempts low-risk master planning changes from the requirement to obtain a Master Plan Permit or Planning Permit. This includes:

1. Land Use and GFA

- Adjustments within approved parameters
- Addition of affordable housing
- Shifting between the same Level 3 (L3) land use categories
- Adoption of approved land uses within designated incentive areas (e.g. Al Quoz)

2. Planning Regulations

- Addition of easements within setbacks
- Increase in setbacks without affecting GFA

3. Design Guidelines

- Removal of boundary walls to enable pedestrian connectivity
- Relocation of entry/egress points along the same parcel frontage

The GPP is applicable only where the development is:

- Non-EIA classified
- Outside special designation areas
- Within the defined scope of the applicable GPP framework


Note: The Planning Authority reserves the right to require an alternative permit application following review of the proposed changes.

B. Permit processes and requirements

4. General Planning Permit



Process flowchart

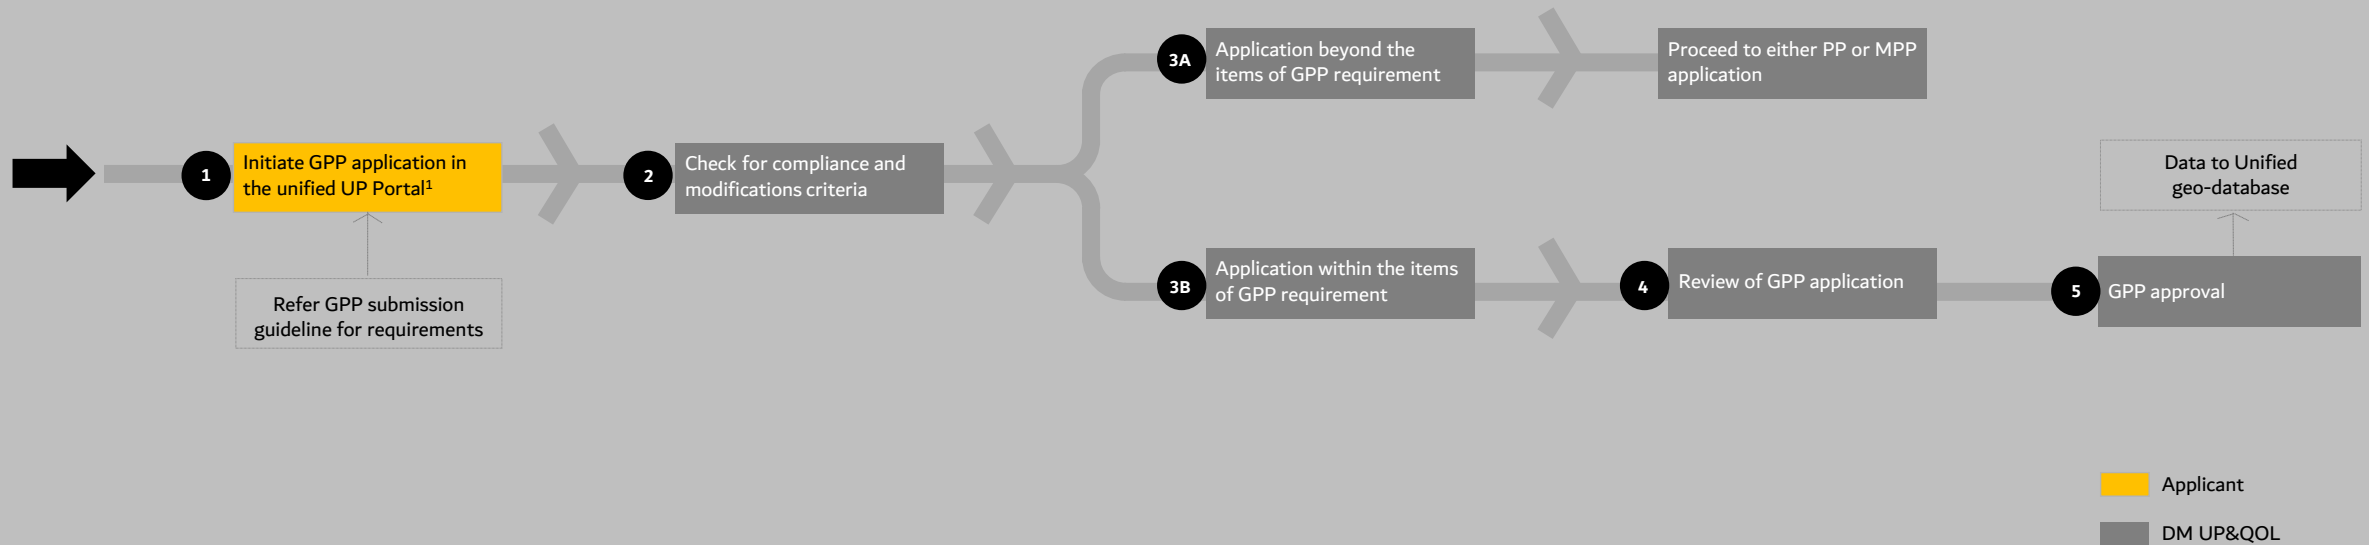

1. Submission in the form of report, digital models and MP digital files as per submission specification defined in the "Submission Checklist" and developer authorization letter.

B. Permit processes and requirements

4. General Planning Permit



Submission checklist

General Planning permit checklist (R2.2, 30/03/2026)

1. The review process begins only when an applicant completes and submits this form, along with all the requirements.
2. All provided material must be clear and concise providing the relevant information as requested.
3. Subject to review, so please contact the issuer to confirm that this is the latest.

Application number and revision: _____ Date: DD/MM/YYYY

Master Developer name: _____ Development project name: _____

Parcel number/s: _____ Authorized contact: _____

Contact details: _____ Contact phone number: _____

Section Item	GPP Requirements				
	Sub	Master	N	M	T
1 Consultant details					
a. Consultant/Company name, Name/Design letter/s (if applicable)					✓
b. Consultant Trade License (if applicable)					✓
2 Alignment with Dubai Structure Plan 2040					
a. Master Developer No Objection Certificate (NOC) for the project changes					✓
3 Development concept					
a. Population served					✓
b. Assumptions and overall projection for residents, workers, and visitors					✓
4 Planned development					
a. Overall land use plan					✓
b. Overall Master land use plan					✓
c. Detailed Project Budget (See format in XLS)					✓
5 Transport Impact Summary*					
a. Plot access plan (entry/egress)					✓
b. Plot access plan (entry/egress)					✓
6 Parking plan					
a. On plot: Car, taxi, bus, motorcycle, ped, etc., shared					✓
b. If needed					

* N = Narrative, I = Image, M = Map, T = Table

Legend: Not required To be kept updated by the master developer

Notes

1. All plans/ maps and tables should co-relate and cross reference each other.

2. Transport include:
a. Mode: public transport
b. Mode: private (taxi, car, etc.)
c. Mode: (if applicable)
d. Relevant operational: Civil defense, delivery, etc. (if applicable) public areas etc.

3. Utilities include:
a. Water: Potable Water, Sewerage, Storm, Recycled water, Irrigation, Fire fighting
b. Gas: High/Med/Low or Voltage: Power, Telecommunications, IT, CCTV
c. Other: (if applicable) static, cooling, etc.

Approved/Rejected

1. GIS (Geo-referenced to DLT, aligned to Spatial Geodatabase attributes)

a. SHP: Site boundary
b. SHP: Existing subdivision with all planning attributes
c. SHP: Proposed subdivision with all planning attributes
d. SHP: All transport and mobility networks with attributes
e. SHP: All utilities sites and networks with attributes
f. SHP: All open spaces with all mobility networks with attributes
g. SHP: All public facilities with attributes
h. SHP: All other facilities and planning regulations
i. SHP: Proposed plot of all existing lots, lots with attributes

2. Detailed Project Budget
a. All calculations should be dynamic with formulae and should link to the GIS

Key notes:

1. Required for the submission by applicant Not required for the submission To be kept updated by master developer in case of review by the Planning Authority
2. Supporting documents: Additional studies prepared by professionals may be requested to support aspects of your application.
3. Propriety specifications: Not recommended unless you are executing a complex master plan

File: UPP - Checklist - General Planning permits - R2.2.pdf

B. Permit processes and requirements

4. General Planning Permit



Making a good application

1. Amendment/s to parcel

1) Development concept

a. Subdivision plan – affected parcels: (Drawing)

- i. **Before and After modification** conditions
- ii. Parcel boundary changes (if any)
- iii. Land use and configuration adjustments
- iv. Clear identification of impacted parcels

b. Detailed Project Budget – Affected Parcels- Table

- i. **Before and After comparison** for all relevant financial components
- ii. Impact of modifications on each parcel
- iii. Summary of budget variations resulting from changes

c. Updated Parcel Regulations.

- i. Provide an updated schedule reflecting revised regulations for the affected parcels, including:
- ii. Updated land use controls
- iii. Revised GFA limits
- iv. Planning and development parameters
- v. Any regulatory amendments resulting from the approved modifications

B. Permit processes and requirements

4. General Planning Permit



Making a good application

1. Amendment/s to parcel

Before drawing sample

BEFORE

Key Map

Plot/Landuse

Residential

Residential Individual

Mixed Use

Mixed Use-Residential

Mixed Use-Commercial

Commercial

Co-Commercial/Hotel

Public Facilities

PF-Healthcare

PF-Education

PF-Social and Culture

Recreation & Hospitality

Event and Exhibition Facility

Agriculture

Agricultural Lands

Open Spaces

Parks

Cardens

Industrial

Light Industry

Medium Industry

Heavy Industry

Transportation

Public Transit

Infrastructure

Utility

APPROVED HOUSING UNITS

VILLAS	TOWNHOUSES	APARTMENTS

APPROVED POPULATION DATA

EMPLOYEES	VISITORS	RESIDENTS

GENERAL INFORMATION

PROJECT NAME	PLLOT NO.	DEVELOPER	PLLOT AREA / SQM	TOTAL GFA / SQM

Community Facilities Requirement

Symbol	Name of Facilities	DM Requirements	Developer Proposed Facilities	Remarks

APPROVED LAND USE BUDGET

LAND USE	AREA / SQM	GFA / SQM	PERCENTAGE

APPROVED Zoning Plots

Plot No.	Land use	Area / Sq/M	Height	GFA / Sq/M	Setback	Front	Rear	Sides	Parking	Remarks

• ALL FILES SHOULD BE IN MICROSTATION FORMAT (DTM) AND 2 DIMENSIONS.
• ALL TABLES SHOULD BE IN TEXT ELEMENT (NOT IMAGE).

Logos

Key Map

Plot/Landuse

Residential

Residential Individual

Mixed Use

Mixed Use-Residential

Mixed Use-Commercial

Commercial

Co-Commercial/Hotel

Public Facilities

PF-Healthcare

PF-Education

PF-Social and Culture

Recreation & Hospitality

Event and Exhibition Facility

Agriculture

Agricultural Lands

Open Spaces

Parks

Cardens

Industrial

Light Industry

Medium Industry

Heavy Industry

Transportation

Public Transit

Infrastructure

Utility

Owner

Consultant

Project Name:

Map Title:
Ground Floor Landuse

SCALE
0 10 20 30 40 50 60 70 80 90 100

After drawing sample

AFTER

Key Map

Plot/Landuse

Residential

Residential Individual

Mixed Use

Mixed Use-Residential

Mixed Use-Commercial

Commercial

Co-Commercial/Hotel

Public Facilities

PF-Healthcare

PF-Education

PF-Social and Culture

Recreation & Hospitality

Event and Exhibition Facility

Agriculture

Agricultural Lands

Open Spaces

Parks

Cardens

Industrial

Light Industry

Medium Industry

Heavy Industry

Transportation

Public Transit

Infrastructure

Utility

PROPOSED HOUSING UNITS

VILLAS	TOWNHOUSES	APARTMENTS

PROPOSED POPULATION DATA

EMPLOYEES	VISITORS	RESIDENTS

GENERAL INFORMATION

PROJECT NAME	PLLOT NO.	DEVELOPER	PLLOT AREA / SQM	TOTAL GFA / SQM

Community Facilities Requirement

Symbol	Name of Facilities	DM Requirements	Developer Proposed Facilities	Remarks

PROPOSED LAND USE BUDGET

LAND USE	AREA / SQM	GFA / SQM	PERCENTAGE

PROPOSED Zoning Plots

Plot No.	Land use	Area / Sq/M	Height	GFA / Sq/M	Set Back	Front	Rear	Sides	Parking	Remarks

• ALL FILES SHOULD BE IN MICROSTATION FORMAT (DTM) AND 2 DIMENSIONS.
• ALL TABLES SHOULD BE IN TEXT ELEMENT (NOT IMAGE).

Logos

Key Map

Plot/Landuse

Residential

Residential Individual

Mixed Use

Mixed Use-Residential

Mixed Use-Commercial

Commercial

Co-Commercial/Hotel

Public Facilities

PF-Healthcare

PF-Education

PF-Social and Culture

Recreation & Hospitality

Event and Exhibition Facility

Agriculture

Agricultural Lands

Open Spaces

Parks

Cardens

Industrial

Light Industry

Medium Industry

Heavy Industry

Transportation

Public Transit

Infrastructure

Utility

Owner

Consultant

Project Name:

Map Title:
Ground Floor Landuse

SCALE
0 10 20 30 40 50 60 70 80 90 100

C.

Appendices

This chapter presents additional details and information to support your application.

C. Appendices

1. Definitions

A-B

Word/ term	Definition
Access	A way of approaching or entering a property.
Adopted	An approved plan that has been entered into Dubai's cadastral system.
Affection plan	Document providing for PUDs or subdivided land parcels key planning parameters allowed for future development.
Application	Material - narratives, drawings and tables - submitted as part of the urban planning permit approval process.
Approval - Conditional	An application that satisfies most of the submission requirements but must still commit to meeting its remaining requirements within a specified period of time to be considered compliant.
Approval - Unconditional	An application that has met all the conditions of its approval. It typically preceded by a conditional approval.
Area - parcel	Total area of a parcel between its boundary lines as measured on a horizontal plane.
Beach	A natural or man-made shore, fronting a water body covered by sand.
Boundary - 1. Emirate	The agreed administrative boundary of the entire Emirate of Dubai under the jurisdiction of His Highness and the lands that fall under the planning purview of the Dubai Municipality.
Boundary - 2. Freehold/ Free zone	Boundaries that demarcate focused economic investment areas by the respective competent authority or by decree/legislation.

B

Word/ term	Definition
Boundary - 2. Sector	The actual geographic area limit used to organize the entire Emirate's land. They do not correspond to physical features and may be changed for administrative or technical reasons.
Boundary - 3. Community	The actual geographic area limit used to organize the Sector. They do not correspond to physical features and may be changed for administrative or technical reasons.
Boundary - 4. Authority Assessment	The perceived geographic area limit used for technical reasons such as transportation or utilities studies. These boundaries may change based on the planning level assessment that is done.
Boundary - 4. Planning block	The perceived geographic area limit used to organize the Community. They typically correspond to physical features, like roads, and may be changed for technical reasons as this boundary is created to carry out urban planning assessments.
Boundary - 5. Project	The actual project limit being executed by a developer. The project might span Sectors, Communities, Authority Assessment zones and Planning blocks. The project boundary is usually fixed but may be changed for financial reasons.
Boundary - 6. District	The perceived geographic limits used to define a project. It is usually based on the defined physical or functional characteristics. The district boundary is typically presented on the project and may change.
Boundary - 7. Neighborhood	The smallest perceived limits of a Project based on its physical or functional characteristics. The neighborhood boundary is not normally presented on a master plan.
Boundary - 8. Parcel	The legal record demarcating the extent(s) of an individual parcel.

C. Appendices

1. Definitions

B

Word/ term	Definition
Building coverage	The horizontal area occupied by all the main and ancillary structures on the same parcel measured from the outer limits of the external walls of each floor, minus the parking lot areas and balconies of all types, aesthetic protrusions, and open and unused areas, divided by the total area of the same parcel.
Building height - Floors	The total number of floors from the ground to the top of the building including any podium or similar structure on which it sits. It does not include any sub-terranean structures.
Building height - Meters	The total building height in floors measured in meters from the ground. The expressed height does not include the height of gate level .
Build-to line	A type of building line used as means of enforcing the continuity of the building façade on a series of adjacent sites, in order to emphasize the street frontage or the definition of a public open space. Its objective is to achieve perceptual continuity.
Built status - Constructed	Fully developed permitted land.
Built status - Under construction	Partially developed permitted land.
Built status - Vacant	Undeveloped permitted land.

B-C

Word/ term	Definition
Built up area (BUA)	Total constructed area in a building or structure measured from the external walls of the building, inclusive of balconies, terraces and other projections, as well as any other covered spaces such as covered parking structures, circulation corridors, loading/unloading bays, basements, service floors, indoor swimming pools and any other permanent structures on the parcel.
Catchment	The area from which a city, service or institution attracts a population that uses its services.
Center	Centers are mixed-use areas focused on the provision of services, employment, shopping, entertainment and leisure activities. While higher-order centers accommodate a diverse range of functions as determined by their hierarchy and population catchment, lower-order centers may cater for the everyday needs of surrounding communities. Dubai's center's hierarchy in order of prominence are: 1. Urban 2. Multi-sector 3. Sector 4. District 6. Community 7. Neighborhood 8. Rural
Circular	A statement of advice or policy issued by the Planning Authority or other public entity to explain how an applicant must comply with the law or regulations.

C. Appendices

1. Definitions

C-D

Word/ term	Definition
Code	Set of discretionary statements and threshold requirements intended to guide land development to achieve a desired level of quality for the physical environment.
Co-located	Share a location or facility with something else.
Competent authority	An authority granted the powers to carry out a specific role.
Compliance	The action of fulfilling all the requirements expected.
Consultee	Any stakeholder that is consulted by the competent authority in relation to the preparation of a spatial plan or the potential approval of an application for any permit.
Control regulations - Development or parcel	A document showing the urban planning regulations (such as height, land use, area, setbacks, building lines) for a full development, and/ or for each parcel in the development, as issued by the relevant planning Authority or master developer.
Cut and fill	The process of moving earth within a project to make the ground more level. Cut and fill <i>balance</i> is achieved when the amount of material from cuts roughly matches the amount of fill needed to achieve the desired land-form.
Density - Development	See Floor Area Ratio
Density - Population	See Population density
Dubai 2040 Alignment	Reviewing of the Master Plan's Compliance with the Dubai structure Plan 2040 Requirements (Land Use – Population Densities – PROS – Affordable housing – TOD requirements)

D-E

Word/ term	Definition
Developer - Master	A statutory authority or licensed real property development company that applies for an urban planning or building permit to carry out a project and will carry out the development in question with its own operational guidelines.
Developer - Sub	A licensed real property development company who is granted the right to develop part of a Master project by a Master developer in accordance with the Master Community Declaration provisions and who is classified as a sub-developer in accordance with the legislation in force in the Emirate.
Development	Building or engineering works in, on, under or over land or the material change of use of any land.
Envelope - Building/ Podium	The three dimensional space within which the podium is permitted to be built defined by parcel regulations such as permissible height and setbacks.
Environmental clearance	A statutory no objection certificate issued by the authority to confirm that an independent environmental impact assessment was done by the applicant and reviewed by the said authority and that the potential adverse impacts of the Project has been studied carefully with the right mitigation measures.

C. Appendices

1. Definitions

E-F

Word/ term	Definition
Excluded	A condition or situation that is intentionally left out of the general requirements.
Exemption	A privilege which dispenses with the general requirements. Exemptions are selective based on the Dubai Municipality's discretion.
Floor area - Gross floor area	The sum of the all the floor areas, measured from the centerlines of the common walls joining two spaces to the exterior surface of the external wall thickness. The measurement excludes external wall features such as corniches, brackets, and façade cladding materials. The gross floor area (GFA) is used to define the floor area ratio (FAR), where FAR is the ratio of GFA to parcel area.
Floor area - Saleable/ Leasable	The sum of the useable space available across all floors to sell or lease. This may exclude, depending on the land use, common areas such as circulation space or communal areas.
Floor area ratio (FAR) - Parcel	Ratio of gross floor area (GFA) to parcel area.
Floor area ratio (FAR) - Zone	Ratio of gross floor area (GFA) to zone area. This may include the highways if these cut through the zone.

F-H

Word/ term	Definition
Framework plan	A strategic document that provides a overview and development guidelines and parameters for the development or management of either - A particular urban planning topic impacting the entire Emirate, or - All topics impacting a small geographic area. as per Law 16 of 2023 regarding Urban Planning in the Dubai Emirate. The Plan provide a roadmap that outlines the policies, planning and design strategies, the target locations and implementation steps to be followed in order to achieve desired goals. the framework plans as a source of development guidelines and parameters
Gate level	The relative height of the parcel entrance from the adjoining road level.
Guideline (See Manual)	A statutory document that an applicant should consult to inform their application.
Hierarchy	An organizing system where each element is ranked as subordinate or superior to another element.
Holding capacity	The maximum estimated development or population based on the current permitted master plan.
Impact study	The systematic process for identifying, predicting, analyzing and managing the potential impacts (positive or negative) of a Project on the topic and the potential effects of the topic on the Project. Topics could include environment, traffic, heritage, real estate market, socio-economic, and marine among others.

C. Appendices

1. Definitions

I

Word/ term	Definition
Incentive	A set of unique or customized planning, design or financial regulatory parameters between the government and the developer to promote a preferred way to develop a project.
Incentive - Density bonus	A planning incentive that offsets the costs of a statutory requirement by allowing the developer to increase the maximum allowable development with additional or bonus GFA to sell or lease at market rates. The density bonus is recorded as an exception to the current planning regulation and may be revoked when the developer no longer fulfills their statutory requirement.
Incentive - Payment in lieu	A compensatory payment made by a developer to the government when they cannot fulfill the statutory planning requirements.
Infrastructure - Transport	The system of fixed physical public works that supports the Emirate's varied movement systems including: - Corridors such as airways, railways, roads, cycle and pedestrian tracks, waterways - Terminals such as airports, vertiports, railway, metro, tram and bus stations, fleet warehouse, trucking terminals, - Parking such as multistorey car parks, park and rides and surface car parking.
Infrastructure - Utilities	The system of fixed physical public works that supports the Emirate's need for electrical power, potable water, sewage, stormwater, recycled water, telecommunications and fiber optics, district cooling, gas, and oil. This includes: - Corridors - Generation and distribution sites

I-M

Word/ term	Definition
Initiative	An action that includes multi-year programs or individual projects in the sectors of governance or development.
Land use	The function or functions that are permitted on a parcel and its individual buildings. The land use is described in hierarchical detail, starting with Land use 1 that provides the general information on the permitted function to Land use 2 and 3 that are more specific.
Manual (see Guideline)	A statutory document that an applicant should consult to inform their application.
Master plan	A comprehensive long-term plan that lays out the proposed subdivisions, rights of way, zoning and other planning regulations to guide the physical development of a specific area based on identified objectives, strategies, and timelines for implementation.
Mezzanine	An intermediate floor in a building that does not extend over the whole floor of the building, and therefore does not count towards the maximum building height.
Modification	A specific change to the existing permitted condition.

C. Appendices

1. Definitions

O-P

Word/ term	Definition
Open space (OS)	Recreational public: Publicly accessible area of public realm or inaccessible landscape. It can include either formal or informal activities or a combination of the two, and forms part of a wider network allowing people to move easily between one space and another. Recreational private:
Overlay	Collection of spatial constraints imposed by the Dubai structure plan, design guidelines and framework plans, defined on the spatial level down to PUD, planning blocks and / or individual parcels.
Owner	The natural or legal person, private or public, in whose name the project land is registered, whether in his capacity as owner, holder, or tenant
Parcel	Area of land that is: a) clearly defined (by landmarks, coordinates, distinct number, and the lengths of its sides and location); a) intended for construction under any approved plan or division project, or by any other method; and a) legally authorized to be used for construction or building as one unit.
Parcel - Frozen	Parcels that are not advisable to be developed due to impending infrastructure works that may affect their designs.
Permit	A legal document provided by the statutory authority that allows development to occur on a particular parcel after it has received the required no objection certificates from the mandated authorities.

P

Word/ term	Definition
Permit - General planning permit	An official document providing details of development activities that have been pre-approved due to their common occurrence and do not require a MPP or, allowing the applicant to proceed directly for a building permit or construction permit application.
Permit - Master plan permit	An official document issued by the respective planning authority to authorize a new master plan or major changes to an approved master plan.
Permit - Planning Permit	An official document issued by the respective planning authority providing details of non-material modifications to previously issued MPPs or affection plans.
Phasing	The order in which growth area development is planned to be prioritized.
Planned unit development (PUD)	Development that has been approved in a process that requires the comprehensive review of project design and that can include a variety of project types, including infill developments, housing developments, and mixed-use developments, such as master planned communities. PUDs is land that is typically not subdivided or prescribed specific land uses, but are regulated by general controls (e.g., FAR, building coverage, building heights).
Planning regulations	Development standards that control the built form and use of the site in order to meet the purpose of the overlay, including identification of the information required to be submitted with an application
Plans	Structure, Framework or detailed master plan used to lay out the developmental expectations at different levels of detail/ scale.
Plot	See parcel

C. Appendices

1. Definitions

P

Word/ term	Definition
Policy	Translation of the government's priorities and principles into a consistent and coordinated series of program to deliver strategic objectives, to address particular social, economic and/or environmental issues, and to effect the desired change.
Population - Density	Ratio of total number of people to the area that they are located in. Population density is used to measure how crowded or spread-out the inhabitants are. Densities range from low (<70 ppl/ ha), medium (>70 to 220ppl/ha) and high (>220ppl/ha). It can be expressed as residential, worker, visitor or peak density.
Population - Holding capacity	The maximum theoretical population estimate derived from the full build out of the master plan across residential, commercial and recreational uses
Population - Types	The nature of users, based on whether they are permanently inhabitant, working or visiting an area. Residents, workers and visitors are the most common types of visitors assumed on a master plan.
Population - Peak	The theoretical maximum number of people in an area that comprises visitors, workers and residents.
Program	A group of interrelated policy instruments or interrelated projects that are integrated to achieve one or more policy objectives. Often a number of program will need to be implemented to achieve a particular policy objective.
Project	A set of actions that are implemented to achieve a specified benefit or objective

P-R

Word/ term	Definition
(Master plan) Project area	An area of land that is registered as a single development within the planning and system, and where one master developer coordinates with the authorities to develop serviced parcels for individual investor or sub-developers.
Project coordinator	The planner assigned by the Planning Department to study and follow up the steps for approving the general plan and coordination between the planning team, the project developer, and the consultant assigned by the owner.
Promenade	A hardscaped public route along the waterfront that can be used for movement or commercial activity.
Public facilities	Essential uses offered to the local users to meet their needs, secure their well-being, and raise their standard of living across health, education, religious and parks either as a standalone parcel or as a part of another parcel.
Public Realm	All spaces between buildings that can be freely accessed by the public. The public space encompasses all outdoor areas including streetscapes and open spaces such as parks, plazas, waterfronts and other publicly accessible areas.
Regeneration	Restoring economic viability in existing areas by attracting external public and private investment through redevelopment incentives.
Register	An official record of all material information on that particular topic. e.g. The National housing register maintains a record of all the available national housing units.
Right of way (RoW)	An area of land to accommodate a transportation system and public utility infrastructure (including but not limited to water lines, sewer lines, and power lines).

C. Appendices

1. Definitions

S-T

Word/ term	Definition
Scoping	The process of highlighting what topics need to be considered within the impact assessment.
Screening	The pre-enquiry process to introduce and discuss the project and decide on whether any impact assessments may be required.
Setback	The least horizontal distance permitted between a parcel limit of a lot and the nearest portion of any building envelope, measured from the ground and above excluding basement, on such a lot.
Sign off sheet (SoS)	The official document authorized by the respective Planning Department, which includes all the key permit related information, such as Project development summary, Authority NoCs.
Site plan	See Affection Plan
Soft mobility	Non-motorized forms of transport involving physical activity, such as walking and cycling.
Standards	See Code
Statutory	A planning tool, such as a policy, map or guideline enforceable by law.
Strategic environmental assessment (SEA)	Broad environmental assessment of the proposed policies, plans, strategies, and programs; and determination of the cumulative impacts of these policies, plans, strategies, and programs and the methods of addressing them.
Structure plan	Plan that outlines the long-term vision, goals, and policy directions for the sustainable and resilient growth of the Emirate. The Structure Plan is the key directive of the permits as per Law 16 of 2023 regarding Urban Planning in the Dubai Emirate, and establishes the key principles that guide subsequent more detail-oriented plans such as the framework plans or master plans.

T-U

Word/ term	Definition
Through zone	Space dedicated for pedestrian movement.
Topography	The arrangement of the natural and artificial physical features of an area.
Trip Generation	The first step in the transportation forecasting process, used to forecast travel demands. It predicts the number of trips originating in or destined for a particular traffic analysis zone (TAZ).
Urban growth boundary	Hard line prescribed in Dubai's statutory planning documents to limit growth.
Use - Ancillary	Providing necessary support to the primary activities or operation of an organization, system, etc.
Use - Change of use	It is modifying the planned use of the land or the building built on it by changing it, for example, from residential use to commercial use or vice versa. This change may be completely or partially, that is, to a specific part of the building only.
Use – Compatibility	A good land use planning principle, whereby land uses which are known or expected to cause adverse impacts, when in proximity from one another, are considered incompatible and are protected by separation and/or other means.
Use – Flexible	Able to be easily modified to respond to altered circumstances
Use - Incompatible	An existing or committed land use or activity that cannot co-exist with a neighbouring use/activity or uses/activities, without either creating or experiencing one or more off-site 'adverse effect(s)'.

C. Appendices

1. Definitions

U-W

Word/ term	Definition
Use - Innominate	A land use not specified as 'permitted' or 'not permitted' within the applicable zone may be permitted as an 'innominate use'. An innominate use would then be assessed as a 'permitted use', having to satisfy the CPA: 1. Consistency with the zone purpose 2. Satisfaction of the zone outcomes 3. Consistency with development control parameters 4. Acceptable environmental and planning impacts
Villa track	The Villa Track is a special route within the MPP process which allows a developer to market villas so that they may be reserved by investors. The remaining parcels within the same master plan are frozen until all the required authority approvals are obtained.
Waterfront	All land along the water's edge.

Z

Word/ term	Definition
Zoned	A parcel that has gone through the urban planning process and has identifiable planning regulations.
Zoning	The broad categories of primary land use, i.e. Land use 1s, that is permitted or prohibited within a single parcel or a collection of parcels (block). This additionally helps explain and define other planning regulations associated with the parcel such as Land use 2s, or Land use 3s.

C. Appendices

2. Abbreviations

Policy related

Abbreviation	Full form
AHP	Affordable Housing Policy
CA	Competent Authority
CPA	Competent Planning Authority
DBC	Dubai Building Code
DSP	Dubai Structure Plan
Dubai 2040	Dubai Structure Plan 2040
DMP	Draft Master Plan (NOT Detailed Master Plan)
DTIM	Dubai Transportation Integration Manual
EIA	Environmental Impact Assessment
E-NoC	Electronic No Objection Certificate
FMP	Final Master Plan

Abbreviation	Full form
GPP	General Planning Permit
MPP	Master Plan Permit
NOC	No objection certificate
PF	Public Facilities
PMP	Preliminary Master Plan
PP	Planning Permit
PROS	Public Recreational Open Space
SLA	Service Level Agreement
SoS	Sign-off Sheet
UP	Urban Plan
VT	Villa track

C. Appendices

2. Abbreviations

Authority names

Abbreviation	Full form
CDA	Community Development Authority
DANS	Dubai Air Navigation Services
DCAA	Dubai Civil Aviation Authority
DCAAA	Dubai Culture and Arts Authority
DCAS	Dubai Corporation for Ambulance Services
DCC	District Cooling Companies
DCD	Dubai Civil Defense
DDA	Dubai Development Authority
DEWA	Dubai Electricity and Water Authority
DHA	Dubai Health Authority
DLD	Dubai Land Department
DM	Dubai Municipality
DM BP	Dubai Municipality Building Permit
DM EP	Dubai Municipality Executive Planning
DM ES	Dubai Municipality Environmental Sustainability
DM GISC	Dubai Municipality Geographic Information Systems Center
DM UP&QOL	Dubai Municipality Urban Planning and Quality of Life
DP	Dubai Police
DS	Dubai South
DSC	Dubai Statistics Center
DSOA	Dubai Silicon Oasis Authority
DUSUP	Dubai Supply Authority
EC3	Enterprise Command and Control center

Abbreviation	Full form
EMICOOL	Emirates District Cooling LLC
EMPOWER	Emirates Central Cooling Systems Corporation
ENOC	Emirates National Oil Company
FZA	Free Zone Authority
HH	His Highness
IACAD	Islamic Affairs and Charitable Activities Department
JAFZA	Jebel Ali Free Zone Authority
KFE	Knowledge Fund Establishment
KHDA	Knowledge and Human Development Authority
MBRHE	Mohammed Bin Rashid Housing Establishment
MHRE	Ministry of Human Resources and Emiratisation
MOCCAE	Ministry of Climate Change and Environment
PCFC	Port, Customs and Free zone Corporation
RTA	Roads and Transport Authority
S-C	Sub-Committee
SCUP	Supreme Committee of Urban Planning
SIRA	Security Industry Regulatory Agency
SLC	Supreme Legislation Committee
SZHP	Sheikh Zayed Housing Programme
TEC	The Executive Council
TRA	Telecommunications Regulatory Authority
Trakhees	Ports Customs & Freezone Corporation – Dept. of Planning & Development
UAE AF	United Arab Emirates Armed Forces

C. Appendices

2. Abbreviations

Other terms

Abbreviation	Full form
Abbr	Abbreviation
AH	Affordable Housing
BUA	Built up area
DC	District cooling
DPB	Detailed Project Budget
DLTM	Dubai Local Transverse Mercator
EV	Electrical Vehicle
ETS	Energy Transfer Station
FAR	Floor Average Ratio
F&B	Food & Beverage
FAQ	Frequently asked questions
GIS	Geographical Information System
GSM	Global System for Mobile Communications
GDP	Gross Domestic Product
GFA	Gross Floor Area
G	Ground
HVAC	Heating, ventilation and air conditioning
ha	hectare
KPI	Key Performance Indicator
LPG	Liquid Petroleum Gas

Abbreviation	Full form
MMR	Meet Me Room
m	Meter
NFP	Not for Profit
ppl	People
pers.	Persons
PUD	Planned Unit Development
OS	Open space
Pol	Point of Interest
RW	Recycled water
RACI	Responsible, Accountable, Consulted, Informed
RO	Reverse Osmosis
SWM	Solid waste management
SWOT	Strengths, Weakness, Opportunities, and Threats
TBC	To Be Confirmed
TBD	To Be Defined/determined
TAZ	Traffic assessment zone
TOD	Transit oriented development

C. Appendices

3. Involved authorities

Approval requirements by authority, permit and stage (1/2)

					VT	MP		PP		GPP
Topic	Authority	Abbr.	Department/ Section	Item		NOC	Final	NOC	Final	
PLANNING										
Structure plan compliance	Dubai Municipality	DM	Urban planning and Quality of Life		✓	✓		✓		
Public facilities compliance	Dubai Municipality	DM	Urban planning and Quality of Life		✓	✓		✓		
Building Heights	Dubai Civil Aviation Authority	DCAA		Approval		✓	✓			
Catchment of Civil Defense Centers	Dubai Civil Defense	DCD		Approval		✓	✓			
Catchment of police stations	Dubai Police	DP		Approval		✓	✓			
Catchment of ambulance points	Dubai Corporation of Ambulance Services	DCAS		Approval		✓	✓			
ENVIRONMENT										
Natural systems and impact	Dubai Municipality	DM	Environment	Approval		✓	✓	✓		
				EIA Report			✓	✓		
HERITAGE AND ARCHAEOLOGY										
Heritage and cultural assets	Dubai Municipality	DM	Architectural Heritage and Antiquities	NOC		✓	✓	✓		
UTILITIES										
WET										
Potable water	Dubai Electricity & Water Authority	DEWA	Water Transmission Planning	Approval	✓	✓		✓		
				Approved Drawings	✓		✓			
				Approved Demands			✓	✓		
Storm water and sewage	Dubai Municipality	DM	Drainage and Sewage Projects	Approval	✓	✓	✓	✓		
				Approved tie-in points			✓			
				Approved demands			✓	✓		
If applicable										

(✓) – If needed

C. Appendices

3. Involved authorities

Approval requirements by authority, permit and stage (2/2)

Topic	Authority	Abbr.	Department/ Section	Item	VT	MP		PP		GPP
						NOC	Final	NOC	Final	
Irrigation	Dubai Municipality	DM	Agriculture and Irrigation	Approval		✓	✓	✓		
				Approved tie-in points			✓			
				Approved demands			✓			
District cooling	District Cooling Companies	DCC		Approval		✓	✓			
				Approved sites			✓			
				Approved demands			✓			
DRY										
Power	Dubai Electricity & Water Authority	DEWA	Power Transmission Planning	Approval	✓	✓		✓		
				Approved Drawings	✓					
				Approved Demands						
Solid waste	Dubai Municipality	DM	Waste Management	Approval		✓	✓			
				Approved sites			✓			
				Approved demands			✓			
Gas	Dubai Supply Authority	DUSUP		Approval		✓	✓	✓		
				Approved sites			✓			
				Approved demands			✓			
Telecommunications	Etisalat/ Du			Approval		✓	✓	✓		
				Approved Drawings						
Safety fiber optics	UAE Armed Forces	UAE AF		NOC		✓	✓			
TRANSPORTATION										
Roads, parking and mobility	Roads and Transport Authority	RTA		Approval	✓	✓	✓	✓		
				Approved Drawings	✓		✓	✓		
				Approved TIS Report			✓	✓		

If applicable

(✓) – If needed

C. Appendices

4. Urban planning overlays and function

Key Urban Planning Overlays and Manuals to follow

The developer and their consultant are responsible for ensuring full compliance with all applicable requirements of this Guideline, including all subsequent updates, as well as all other relevant standards within the Dubai Urban Planning system.

The following provides a summary of approved overlays and manuals, as well as those under development, which may impact the master plan.

Approved

Whole Emirates

1. Urban Design and Public Realm
2. Transit Oriented Development
3. Urban Greenery
4. Affordable Housing
5. Worker's Accommodation and Low-income housing

Hatta

1. Hatta Framework Plan
2. Hatta Urban Design and Public Realm

Under development

Whole Emirates

1. Urban Centers
2. Heritage and Art
3. Natural Conservation areas
4. Public Facilities

C. Appendices

5. Land use code

Land Use Classification for Level 1, 2 and 3 (1/14)

L3 land uses, regulated by Dubai 2040 20-minute city requirements are underlined

L1 key	L1 name	L2 key	L2 name	L3 key	L3 name	Definition
R	Residential	R.1.	Residential Individual	R.1.1.	Detached Villa	Parcel with a single standalone building containing one dwelling unit.
				R.1.2.	Attached Villa	Parcel with a single building attached to one or several other buildings on neighbouring parcels and containing one or multiple dwelling units.
				R.1.3.	Palace	Parcel with a single large and decorated building, containing one dwelling unit.
		R.2.	Residential Multi-Family	R.2.1.	Villa Compound	Parcel with several detached villas, each containing one dwelling unit, which has a direct access from the street or courtyard.
				R.2.2.	Attached Villa Compound	Parcel with several attached villas, containing one or multiple dwelling units, which has a direct access from the street or courtyard.
				R.2.3.	Apartment	Parcel with a single or several buildings, containing more than one dwelling with shared common spaces
		R.3.	Residential Collective	R.3.1.	Staff Accommodation	Parcel with one or several buildings, containing dwelling units for long-term accommodation of skilled professional specialists, e.g., engineers, medical workers, etc.
				R.3.2.	Worker Accommodation	Parcel with one or several buildings, containing dwelling units for long-term accommodation of workers

C. Appendices

5. Land use code

Land Use Classification for Level 1, 2 and 3 (2/14)

L3 land uses, regulated by Dubai 2040 20-minute city requirements are underlined

L1 key	L1 name	L2 key	L2 name	L3 key	L3 name	Definition
H	Recreation and Hospitality	H.1.	Resort	H.1.1.	Resort	Parcel with restricted access dedicated to short-term accommodation and provision of ancillary services, e.g., entertainment, sports, food and beverages
		H.2.	Hotel and Hotel Apartment	H.2.1.	Hotel	Parcel with a single or several buildings for short-term accommodation
				H.2.2.	Hotel Apartment	Parcel with a single or several apartment buildings for short-term accommodation
				H.2.3.	Serviced Villa	Parcel with a compound of villas and recreational facilities (e.g., pool) for short-term accommodation
				H.2.4.	Hostel	Parcel with one or several buildings, containing dwelling units for temporary lodging of a specific group of people not related to educational institutions and used for commercial purpose
		H.3.	Event and Exhibition Facility	H.3.1.	Convention center	Parcel with a facility for public or group assembly, e.g., convention, congress, expo centers etc.
				H.3.2.	Outdoor Event Venue	Parcel dedicated for outdoor events and gatherings
		H.4.	Recreation Facility	H.4.1.	<u>Sport Venue</u>	Parcel with an indoor or outdoor facility for accommodation of sports events, e.g., large stadiums, arenas, courts, rinks, swimming pools, racing tracks, velodrome, tournament stadium etc.
				H.4.2.	Entertainment Park	Parcel with indoor or outdoor facilities for public amusement, e.g., amusement, themed, water parks etc.
				H.4.3.	Zoo and Botanical Garden	Parcel with facilities to accommodate establishments which maintains a collection of wild animals or plants for study, conservation, or display to the public
				H.4.4.	Private Club	Parcel with restricted access for outdoor and indoor facilities to accommodate an association dedicated to a particular interest or activity, including sports activities, etc., except for golf clubs and equestrian centers
				H.4.5.	Golf Course	Parcel with restricted access for outdoor accommodation of golf clubs
				H.4.6.	Equestrian center	Parcel occupied with facilities for accommodating, training, competing equids, including horses, camels
				H.4.7.	Other Recreation	Parcel allocated for other non-specified recreational facilities.

C. Appendices

5. Land use code

Land Use Classification for Level 1, 2 and 3 (3/14)

L3 land uses, regulated by Dubai 2040 20-minute city requirements are underlined

L1 key	L1 name	L2 key	L2 name	L3 key	L3 name	Definition
C	Commercial	C.1.	Office	<u>C.1.1.</u>	<u>Office</u>	Parcel dedicated to allocation of workspace for administrative, business, professional, clerical activities
				<u>C.1.2.</u>	<u>Co-working</u>	Parcel dedicated to allocation of workspaces that are shared by employees from different companies
		C.2.	Retail	<u>C.2.1.</u>	<u>General Retail</u>	Parcel with facilities for the sale and display of goods, including convenience stores, shops, boutiques, department stores, supermarkets, strip retail, on-street retail, dedicated F&B shops, cafe which can be allocated in standalone buildings or together with other uses, with total GFA less than 10,000 sqm.
				C.2.2.	Showrooms	Parcel with standalone facility for display and sale of goods, with total GFA less than 50,000 sqm.
		C.3.	Mall	<u>C.3.1.</u>	<u>Shopping Centre (without superstore)</u>	Parcel with a standalone indoor shopping center accompanied by entertainment activities, without allocation of superstore, GFA less than 100,000 sqm.
				C.3.2.	Major Shopping Centre	Parcel with a standalone indoor shopping center accompanied by entertainment activities, with allocation of superstore, GFA less than 100,000 sqm.
				C.3.3.	Shopping Mall	Parcel with a large standalone indoor shopping center accompanied with entertainment activities, GFA more than 100,000 sqm.
		C.4.	Wholesale	C.4.1.	Vegetables Market	Parcel allocated for the wholesale of agricultural crops. It includes nurseries, administrative buildings and warehouses, workers housing.
				C.4.2.	Livestock Market	Parcel allocated for livestock market, slaughterhouse and associated storage.
				C.4.3.	Food Hubs	Parcel allocated for food truck parks, cloud kitchen hubs specifically for retail purposes
				C.4.4.	Vehicle Market	Parcel allocated for buying and selling vehicles and spare parts.
				C.4.5.	General Wholesale	Parcel allocated for buying and selling in wholesale such as building material, electronics, computer peripherals

C. Appendices

5. Land use code

Land Use Classification for Level 1, 2 and 3 (4/14)

L3 land uses, regulated by Dubai 2040 20-minute city requirements are underlined

L1 key	L1 name	L2 key	L2 name	L3 key	L3 name	Definition
F	Public Facility	F.1.	Education	<u>F.1.1.</u>	<u>Early Learning Center</u>	Parcel for the care of toddlers and pre school education, including nursery and kindergarten and any ancillary facilities.
				F.1.2.	Primary School	Parcel for primary education and any ancillary facilities.
				F.1.3.	Intermediate School	Parcel for intermediate education and any ancillary facilities.
				F.1.4.	Secondary School	Parcel for secondary education and any ancillary facilities.
				F.1.5.	Multi-level School	Parcel for K-12 and combination of different level of education (primary, intermediate, and secondary) and any ancillary facilities.
				F.1.6.	Technical Training center	Parcel for vocational training and its ancillary facilities.
				F.1.7.	University and College	Parcel for post school education, that offer graduate and post graduate education and its ancillary facilities.
	Religious	F.2.	Religious	<u>F.2.1.</u>	<u>Local Masjid</u>	Parcel for allocation of a mosque serving a neighborhood or community
				<u>F.2.2.</u>	<u>Juma Masjid</u>	Parcel for allocation of a large mosque serving districts and larger areas
				F.2.3.	Eid Prayer	Parcel that holds prayers for large group of people typically in an open area.
				<u>F.2.4.</u>	<u>Prayer Room</u>	Parcel allocated for a separate prayer room building
				F.2.5.	Other Islamic Centre	Parcel allocated for facilities associated with Islam, e.g., Holy Quran Memorization Centre, places of worship.
				F.2.6.	Other Religions facilities	Parcel allocated for buildings and centers for religious practices other than Islam.
				F.2.7.	Cemetery	A land that is specifically designated for the interment of human remains
	Healthcare	F.3.	Healthcare	<u>F.3.1.</u>	<u>Clinics</u>	Parcel allocated for general and specialist examinations and treatments for outpatients by private and semi government such as general clinics, poly clinics, speciality clinics

C. Appendices

5. Land use code

Land Use Classification for Level 1, 2 and 3 (5/14)

L3 land uses, regulated by Dubai 2040 20-minute city requirements are underlined

L1 key	L1 name	L2 key	L2 name	L3 key	L3 name	Definition
F	Public Facility	F.3.	Healthcare	<u>F.3.2.</u>	<u>Healthcare Centre</u>	Parcel allocated for specialized examinations and treatments for outpatients by the Government include government clinics and health centre
				<u>F.3.3.</u>	<u>Hospital</u>	Parcel allocated for general health services of inpatient and outpatient mode
				F.3.4.	Specialized Hospital	Parcel allocated for specialized health services of inpatient and outpatient mode, e.g., women's hospitals, cardiac hospitals, oncology hospitals, trauma centers, cancer treatment centers etc.
				F.3.5.	Rehabilitation center	Parcel allocated for rehabilitation of patients with various medical conditions following stabilization of their acute medical issues
				F.3.6.	Elderly Care Facility	Parcel allocated for provision of care for elder people, including assisted living, day-care, residential care and hospice care
				F.3.7.	Veterinary Hospital	Parcel allocated for the medical treatment, examination, surgery, diagnosis, grooming, general health care, and observation of domestic animals and birds.
				F.3.8.	Other Healthcare Facilities	Parcel allocated for other non-specified healthcare related facilities.
				F.3.9.	Specialized Clinic	Parcel allocated for specialized examinations and treatments for outpatients.
		F.4.	Government Service	F.4.1.	Government center	Parcel allocated for municipal and governmental services, which involve direct interaction with customers
				F.4.2.	Court	Parcel with a building to accommodate court of law
				F.4.3.	Post Office	Parcel with amenities to postal services
				F.4.4.	Public Sanitation	Parcel with sanitation facilities such as public toilets and baths
				F.4.5.	Other Government Services	Parcel allocated for non-specified government services and its related facilities.
				F.4.6.	Consulate	Parcel allocated to international diplomatic relations such as embassies, consulates , and its related facilities.
		F.5.	Social and Cultural	F.5.1.	Gallery and Museum	Parcel with facilities for storage, research and public demonstration of objects of historical, scientific, artistic or cultural interest.
				F.5.2.	Performing Art center	Parcel with a facility for accommodation of performing art forms, e.g., theatres, circuses, opera and concert halls, and arenas etc.

File: Land Use Manual 1-2.pdf

C. Appendices

5. Land use code

Land Use Classification for Level 1, 2 and 3 (6/14)

L3 land uses, regulated by Dubai 2040 20-minute city requirements are underlined

L1 key	L1 name	L2 key	L2 name	L3 key	L3 name	Definition
F	Public Facility	F.5.	Social and Cultural	F.5.3.	Library	Parcel with facilities containing collections of books, periodicals, and sometimes films and recorded music for use or borrowing by the public or the members of an institution.
				F.5.4.	Multi-Purpose Facility	Parcel with facilities designed for gathering of people and celebration public events and other non specified social and cultural services
				F.5.5.	Other Social and Cultural Facilities	Parcel allocated in national housing areas for social and cultural needs including majlis, community and family care centers, thukar club, wedding halls.
		F.6.	Community Sport	<u>F.6.1.</u>	<u>Indoor Sports Center</u>	Parcel with small and medium sized indoor facilities for accommodation of sport activities and events, including swimming pools, gyms, ice rinks, cycling tracks, skate parks etc.
				F.6.2.	Sports Ground	Parcel with outdoor facilities for sports activities and playing games including spaces for activities, fields and courts for ball games, athletics grounds, extreme sports grounds etc.
		F.7.	Safety, Security and Other Facilities	F.7.1.	SPS	Parcel allocated for different hierarchy of smart police station.
				F.7.2.	Police Station	Parcel allocated for police station and other police related facilities
				F.7.3.	Civil Defence Point	Parcel allocated for a civil defence point and fire points
				F.7.4.	Civil Defence Center	Parcel allocated for civil defence station, including fire station.
				F.7.5.	Ambulance Point	Parcel allocated for an ambulance point or station.
				F.7.6.	Ambulance Center	Parcel allocated for an ambulance station and center
				F.7.7.	Penal and Correctional Institution	Parcel allocated for correctional institutions, including prisons.
				F.7.8.	Military Facility	Parcel allocated for military facilities, including camps, airfields, live firing training areas and other.
				F.7.9.	Coast Guard	Parcel allocated for security and coast guard facilities, including observation towers, boat warehouses, etc
				F.7.10.	Other Security	Parcel allocated for non-specified security services and its related facilities.
		F.8.	General Facilities	F.8.1.	Petrol Station	Parcel allocated for fuel stations and auxiliary facilities.
				F.8.2.	Financial Services	Parcel allocated for financial advisory services and its related facilities (like banks, ATM).
				F.8.3.	Community Distribution Center	Parcel allocated for local level distribution serving last-mile delivery operations, including operators such as Noon, Amazon, and similar companies
				F.8.4.	General Facility	Parcel allocated for non-specified public facilities and services.

File: Land Use Manual 1-2.pdf

C. Appendices

5. Land use code

Land Use Classification for Level 1, 2 and 3 (7/14)

L3 land uses, regulated by Dubai 2040 20-minute city requirements are underlined

L1 key	L1 name	L2 key	L2 name	L3 key	L3 name	Definition
I	Industrial	I.1.	Industrial Light	I.1.1.	Industrial Light	Parcel with facilities for the manufacturing of: - Industrial scale kitchen facilities, Central/satellite. - Clothing, Textile, Knit Goods and Leather - Electrical Product or Appliance - Food or Beverage Product - Furniture or Fixture - Information Communication Technology - Jewelry - Light Chemical Product - Light Metal Product - Light Non-Metallic - Plastic Product - Printing, Publishing, Paper Product or Light Wood Product - Tobacco Product
				I.1.2.	Vehicle Service	Parcel allocated for the servicing of automobiles and vehicles.
		I.2.	Industrial Medium	I.2.1.	Industrial Medium	Parcel with facilities for the manufacturing of: - Brewing or Distilling - Chemicals or Chemical Product - Machinery or Equipment - Non-Metallic Mineral Product - Rubber and Rubber Product - Transportation Equipment
				I.3.1.	Industrial Heavy	Parcel with facilities for the manufacturing of: - Animal Product Processing - Heavy Metal Product - Paper, Pulp or Wood Product - Petroleum Product or Coal Product - Ready construction materials (pre-fab, 3D printing, cement and ready-mix concrete plant)
		I.4.	Logistics	I.4.1.	Fulfilment Centre	Parcel with facilities for immediate delivery of goods.
				I.4.2.	Distribution Warehouse	Parcel with facilities for storage and distribution of goods.
				I.4.3.	Warehouse	Parcel with facilities for bulk storage of goods.
		I.5.	Logistics	I.5.1.	STEAM Industrial	Industrial uses focused on STEAM based activities
				I.5.2.	Hi Tech Industrial	Industrial uses focused on innovation, hi-tech and data center

C. Appendices

5. Land use code

Land Use Classification for Level 1, 2 and 3 (8/14)

L3 land uses, regulated by Dubai 2040 20-minute city requirements are underlined

L1 key	L1 name	L2 key	L2 name	L3 key	L3 name	Definition
T	Transportation	T.1.	Public Transit	T.1.1.	Public Transit Terminal and Interchange	Parcel with public transit passenger terminals and interchanges, such as metro, bus, coach, tram stations and stops.
				T.1.2.	Public Transit Vehicle Storage	Parcel with facilities for storage of public transit vehicles such as depots and parking grounds.
				T.1.3.	Public Transit Way	Parcel or land dedicated to public transit movement.
	Maritime	T.2.	Maritime	T.2.1.	Seaport and Facility	Parcel with seaport facilities such as shipyards, freight terminals, ship repairing facilities, docks, piers etc.
				T.2.2.	Sea Terminal	Parcel with passenger terminals and interchanges
				T.2.3.	Waterway	Parcels or land dedicated to maritime corridors within sea, canals and navigable rivers
				T.2.4.	Maritime Vehicle Storage and Parking	Parcel with facilities for storage of marine vehicles such as moorings, marinas, boat yards and anchorage for watercrafts
	Aviation	T.3.	Aviation	T.3.1.	Airport Terminal	Parcel with facilities related to handling of passengers, facilities supporting passengers of commercial airports.
				T.3.2.	Runway	Parcel or land dedicated to placement of runways strips
				T.3.3.	Helipad/Vertiport	Parcel with facilities for small scale aviation such as airpod, helipad, air taxi station.
				T.3.4.	Aviation Facility	Parcel with airport related operational facilities, airport related to private and military operations, helipads and other related facilities.
	Rail	T.4.	Rail	T.4.1.	Rail Terminal and Interchange	Parcel with railway passenger terminals and interchanges
				T.4.2.	Train Storage	Parcels with facilities for storage and maintenance of trains such as depots and sidings

C. Appendices

5. Land use code

Land Use Classification for Level 1, 2 and 3 (9/14)

L3 land uses, regulated by Dubai 2040 20-minute city requirements are underlined

L1 key	L1 name	L2 key	L2 name	L3 key	L3 name	Definition
T	Transportation	T.4.	Rail	T.4.3.	Railway Corridor	Parcels or land dedicated to railway corridors
				T.4.4.	Freight Rail Station and Facility	Parcels with facilities for loading goods onto and off railway wagons from / to ships or road vehicles, including storage and loading sidings, cranes, warehouses, etc.
		T.5.	Right of Way	T.5.1.	Road and Street	Land dedicated to vehicular movement
				T.5.2.	Other ROW	Land dedicated for other movements corridors such as access road not aligned with RTA C/S, transit corridors
		T.6.	Other Transportation	T.6.1.	Car Park	Parcels for long and short stay car parks, 'Park and Ride' terminals and electric vehicle charging stations
				T.6.2.	Truck Park	Parcels for truck rest areas
				<u>T.6.3.</u>	<u>Cycling and Active Mobility</u>	Parcels, ROWs and corridors allocated for cycle and other active mobility parking and routes.
U	Utility	U.1.	Dry Utility	U.1.1.	Power Strategic	Parcel with facilities for production and generation of electricity and related strategic infrastructure
				U.1.2.	Power Transmission and Substation 132/400 KV	Parcel or land for electrical transmission of 132/400 KV such as sub stations, corridors.
				U.1.3.	Power Transmission and Substation 132/33 KV	Parcel or land for electrical transmission of 11/132 KV such as sub stations, corridors.
				U.1.4.	Power Transmission and Substation 33/11 KV	Parcel or land for electrical transmission of 11/33 KV such as sub stations, corridors.

File: Land Use Manual 1-2.pdf

C. Appendices

5. Land use code

Land Use Classification for Level 1, 2 and 3 (10/14)

L3 land uses, regulated by Dubai 2040 20-minute city requirements are underlined

L1 key	L1 name	L2 key	L2 name	L3 key	L3 name	Definition
U	Utility	U.1.	Dry Utility	U.1.5.	Power Transmission and Substation 11 KV	Parcel or land for electrical transmission of 11 KV such as sub stations, corridors.
				U.1.6.	Power Distribution Facility	Parcel with facilities for distribution of electricity such as transformer stations, Distribution boards, distribution corridor.
				U.1.7.	O&G Field/Storage	Parcel with facilities for extraction and storage of oil and gas.
				U.1.8.	O&G Transmission	Parcel or land with Facilities for transmission of oil or gas such as O&G transmission corridors and associated infrastructure
				U.1.9.	O&G Distribution	Parcel with facilities for distribution of oil and gas, such as pumping stations, distribution corridor.
				U.1.10.	Telecommunication Facility	Parcel with telecommunication facilities for transmitting and receiving messages by telephone, radio, radar, cable, television, microwave and satellite, telecommunication corridor.
				U.1.11	Waste Disposal or Treatment Facility	Parcel with waste disposal and treatment facilities including tips, landfill sites and disposal plant.
				U.1.12	Waste Transfer Facility	Parcel with facilities where solid waste is unloaded from collection vehicles for reloading into larger, long-distance vehicles for transport to landfills or other permitted solid waste facilities for final disposal.
				U.1.13.	District Cooling Facility	Parcel with facilities for production and distribution of centrally cooled air and dedicated corridor.
				U.1.14.	Other Dry Utilities	Parcel allocated for other non-specified dry utilities.
		U.2.	Wet Utility	U.2.1.	Potable Water Strategic	Parcel for water treatment and purification facilities, including extraction from springs, rivers or aquifers.

File: Land Use Manual 1-2.pdf

C. Appendices

5. Land use code

Land Use Classification for Level 1, 2 and 3 (11/14)

L3 land uses, regulated by Dubai 2040 20-minute city requirements are underlined

L1 key	L1 name	L2 key	L2 name	L3 key	L3 name	Definition
U	Utility	U.2.	Wet Utility	U.2.2.	Potable Water Transmission	Parcel with facilities for transmission of potable water such as transmission corridor and associated infrastructure.
				U.2.3.	Potable Water Distribution	Parcel for water storage and distribution places, such as reservoirs, water towers, pumping stations, distribution corridor.
				U.2.4.	Sewerage Disposal and Treatment	Parcel with facilities for sewage disposal and treatment works.
				U.2.5.	Sewerage Facility	Parcel with facilities for sewage pumping stations, lift station, transfer station, storage station
				U.2.6.	Sewerage Transmission	Parcel with facilities for transmission of sewage water such as deep tunnel corridor, transmission corridors and associated infrastructure
				U.2.7.	Stormwater Transmission	Parcel with facilities transmission of stormwater through deep drainage tunnels, trunk drainage corridors, major channels, and associated infrastructure.
				U.2.8.	Stormwater Facility	Parcel with facilities to convey storm runoff, remove pollutants and to control flow rates, including pipes, ditches, swales, filters, underground tanks and vaults, storm water corridor.
				U.2.9.	Stormwater Pond	Parcel with a basin that is built for the purpose of capturing and storing stormwater runoff, either temporarily or for an extended period of time.
				U.2.10.	Irrigation/ Recycled Water Facility	Parcel with facilities for the distribution, delivery, diversion, and storage of Irrigation/ Recycled water.
				U.2.11.	Irrigation/ Recycled Water Transmission	Parcel with facilities for transmission of Irrigation/ Recycled water such as transmission corridor and associated infrastructure.
				U.2.12.	Irrigation/ Recycled Water Distribution	Parcel with facilities for distribution of Irrigation/ Recycled water such as Distribution corridor and associated infrastructure.
				U.2.13.	Other Wet Utilities	Parcel allocated for other non-specified wet utilities.
		U.3.	Utility Corridor	U.3.1.	Integrated Utility Corridor	Parcel allocated for corridors that integrate different authorities' wet and dry utility systems or integrate different hierarchy of same type

C. Appendices

5. Land use classification

Land Use Classification for Level 1, 2 and 3 (12/14)

L3 land uses, regulated by Dubai 2040 20-minute city requirements are underlined

L1 key	L1 name	L2 key	L2 name	L3 key	L3 name	Definition
A	Agriculture	A.1.	Animal and Livestock	A.1.1.	Animal Farm	Parcel with facilities for animal husbandry for meat, fibre, milk, or other products
				A.1.2.	Ezbah	Parcel with animal farm combined with traditional settlement and potential heritage function
				A.1.3.	Stable	Parcel with facilities for sheltering and feeding of livestock, especially horses
				A.1.4.	Aquaculture	Parcel and watershed area with facilities for controlled cultivation of aquatic organisms
		A.2.	Agriculture	A.2.1.	Farm	Parcel allocated for conventional agriculture use, with associated facilities dependent on primary agriculture such as guest house allowed for non-commercial purpose
				A.2.2.	Productive Farm	Parcel with facilities for hitech commercial agricultural use like greenhouse, hydroponics, innovative agricultural facilities, and agriculture associated research.
				A.2.3.	Plant Nursery	Parcel with facilities for the growing of plants, shrubs, trees, vegetables, field crops, berry or bush crops, or orchard crops
				A.2.4.	Other Agricultural Services	Parcel allocated for non-specific, but agriculture related services and facilities such as fertiliser storage, agro-services.
O	Open Space	O.1.	Park	<u>O.1.1.</u>	<u>Neighborhood Park</u>	Parcel or land allocated for recreation, open for public access, includes planted soft landscape surfaces, as well as grounds and pavilions and serving one neighborhood
				<u>O.1.2.</u>	<u>Community Park</u>	Parcel or land allocated for recreation, open for public access, includes planted soft landscape surfaces, as well as grounds and pavilions and serving one community
				<u>O.1.3.</u>	<u>District Park</u>	Parcel or land allocated for recreation, open for public access, includes planted soft landscape surfaces, as well as grounds and pavilions and serving one district
				O.1.4.	Sector Park	Parcel or land allocated for recreation, open for public access, includes planted soft landscape surfaces, as well as grounds and pavilions and serving one city sector
				O.1.5.	City Park	Parcel or land allocated for recreation, open for public access, includes planted soft landscape surfaces, as well as grounds and pavilions and serving entire city

C. Appendices

5. Land use code

Land Use Classification for Level 1, 2 and 3 (13/14)

L3 land uses, regulated by Dubai 2040 20-minute city requirements are underlined

L1 key	L1 name	L2 key	L2 name	L3 key	L3 name	Definition
O	Open Space	O.1.	Park	<u>O.1.6.</u>	<u>Pocket Park/Totlot</u>	Parcel allocated for recreation, open for public access, includes planted soft landscape surfaces at a block level
				O.1.7.	Linear Park	Linear corridor or parcel allocated for recreation, open for public access, and includes planted soft landscape surfaces within or outside ROW areas.
				O.1.8.	Other Park	Parcel allocated for recreation, open for public access and don't fall into defined hierarchy of parks (as per community facilities requirement) such as interchange parks, desert parks, conservation parks.
O	Open Space	O.2.	Beach and Waterbody	O.2.1.	Public Beach	Parcel along a water body shore, covered with pebbles or sand, used for recreational activities.
				O.2.2.	Private Beach	Seashore area with limited access and provision of entertainment facilities.
				O.2.3.	Water Body	Parcel with a clear distinguishable part of surface water, such as a creek, lake, lagoon, or a part thereof, with the exception of navigable parts of these water bodies.
		O.3.	Public Realm	O.3.1.	Square/ Plaza	Public open space where people gather and interact, such as for transit around a transport station, or for temporary activities such as markets, demonstrations and concerts.
				O.3.2.	Promenade	Parcel or land with a long, open, level and paved area, including waterfront promenades, boulevards, etc.
				O.3.3.	Sikka	A pedestrian, cycle or emergency access path between parcels that may also carry underground utilities limiting landscape treatment, i.e. no trees, only interlock tiles, with a standard width of 6m.
				O.3.4.	Green Corridor	A dedicated integrated micro mobility corridor/path with pedestrian path, pmd/ cycleway routes, play areas/ gyms, softscape, trees, physical and natural shade structures, signage and lighting.
		O.4.	Wilderness and Landscape	O.4.1.	Wilderness	Parcel or land which is wild uncultivated and uninhabited by human beings, including land parcels that need to be preserved from any activity for conservation purposes
				O.4.2.	Buffer Zone	Parcel or land used as a buffer zones to separate confliction land-uses
				O.4.3.	Landscape	Parcel or land located within inhabited city areas, occupied by vegetation, but not classified as public park due to its low impact or small area
				O.4.4.	Breakwater	Parcel allocated to offshore structures that protect the beach, harbor or inlet from the force of the open water or the movement of sediment.

File: Land Use Manual 1-2.pdf

C. Appendices

5. Land use code

Land Use Classification for Level 1, 2 and 3 (14/14)

L1 key	L1 name	L2 key	L2 name	Definition	L3 key	L3 name
MX	Mixed Use	MX.1.	Mixed Residential	1) Mixed use - L3 land use designation based on GFA allocation for L3 category of other uses 2) Mixed use - L2 land use designation based on the dominant land use calculated from L3 level GFA allocation. If GFA allocation is equal, the development character of the planning block will be considered to assign a L2 land use category 3) Mixed use - refer to land use compliance matrix for allowed and conditional land uses per L2 land use designation 4) Mixed use condition is determined when a shared facility exceeds 10% of the total GFA of the parcel		
		MX.2.	Mixed Hospitality			
		MX.3.	Mixed Commercial			
		MX.4.	Mixed Industrial			
		MX.5.	Mixed Facility			
		MX.6.	Mixed Transportation			

— L3 land uses, regulated by Dubai 2040 20-minute city requirements are underlined

L1 key	L1 name	L2 key	L2 name	L3 key	L3 name	Definition
LB	Landbank	LB.1.	Park	LB.1.1.	PUD	Parcels with area more than 50,000m2 designated for future master planned development.
				LB.1.2.	Under Study	Parcel assigned for under study.
				LB.1.3.	Reserved	Parcels for reserved for future use or potential allocation of other facilities, currently occupied by interim uses (e.g., parking with landscaping).
				LB.1.4.	Unzoned	Parcels identified for future development but with no assigned development condition or landuse.

C. Appendices

5. Land use code

Land Use and Zoning matrix (1/8)

✓ Allowed ✓ Conditionally allowed ✗ Not allowed

Land use classification

Zone (identified in the Structure plan)

L1	L2	L3	Comm- ercial	Conser- vation	Light Industry	Heavy Industry	Land bank	Mixed -use	Open space and recreation	Public services	Low- density residential	Med.- density residential	High- density residential	Rural	Tour- ism	Wilderness	Trans- portation	Utilities
R	Residential	R.1 Residential Individual	R.1.1. Detached Villa	✗	✗	✗	✗	✗	✗	✗	✓	✓	✗	✓	✓	✗	✗	✗
			R.1.2. Attached Villa	✗	✗	✗	✗	✗	✗	✗	✓	✓	✗	✓	✓	✗	✗	✗
			R.1.3. Palace	✗	✗	✗	✗	✗	✗	✗	✓	✓	✗	✓	✓	✗	✗	✗
	Residential	R.2. Residential Multi-Family	R.2.1. Villa Compound	✗	✗	✗	✗	✗	✗	✗	✓	✓	✗	✓	✓	✗	✗	✗
			R.2.2. Attached Villa Compound	✗	✗	✗	✗	✗	✗	✗	✓	✓	✓	✓	✓	✗	✗	✗
			R.2.3. Apartment	✓	✗	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗
	Residential	R.3. Residential Collective	R.3.1. Staff Accommodation	✓	✗	✓	✗	✓	✗	✓	✗	✓	✓	✓	✓	✗	✗	✗
			R.3.2. Worker Accommodation	✓	✗	✓	✓	✓	✗	✓	✗	✓	✓	✓	✓	✗	✓	✓
H	Recreation and Hospitality	H.1. Resort	H.1.1. Resort	✓	✗	✗	✗	✓	✗	✗	✓	✗	✗	✗	✓	✗	✗	✗
		H.2. Hotel and Hotel Apartment	H.2.1. Hotel	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✗	✓	✗
			H.2.2. Hotel Apartment	✓	✗	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗
			H.2.3. Serviced Villa	✓	✗	✓	✗	✓	✗	✓	✓	✓	✓	✓	✓	✗	✗	✗
			H.2.4. Student Accommodation	✓	✗	✗	✗	✓	✗	✓	✗	✓	✓	✓	✓	✗	✗	✗
		H.3. Event and Exhibition Facility	H.3.1. Convention Centre	✓	✗	✓	✗	✓	✓	✓	✗	✗	✗	✗	✓	✗	✗	✗
			H.3.2. Outdoor Event Venue	✓	✗	✓	✗	✓	✓	✓	✗	✗	✗	✓	✓	✗	✗	✗
		H.4. Recreation Facility	H.4.1. Sport Venue	✓	✗	✓	✗	✓	✓	✓	✓	✓	✓	✗	✓	✗	✗	✗
			H.4.2. Amusement Park or Venue	✓	✗	✓	✗	✗	✓	✓	✓	✓	✓	✗	✓	✗	✗	✗

C. Appendices

5. Land use code

Land Use and Zoning matrix (2/8)

Land use classification

Zone (identified in the Structure plan)

✓ Allowed ✓ Conditionally allowed ✗ Not allowed

					Commercial	Conservation	Light Industry	Heavy Industry	Land bank	Mixed-use	Open space and recreation	Public services	Low-density residential	Med.-density residential	High-density residential	Rural	Tourism	Wilderness	Transportation	Utilities			
L1	L2		L3																				
H	Recreation and Hospitality	H.4. Recreation Facility	H.4.3.	Zoo and Botanical Garden	✓	✓	✓	✗	✗	✗	✓	✓	✗	✗	✗	✗	✓	✗	✗	✗			
			H.4.4.	Private Club	✓	✗	✓	✗	✗	✓	✓	✗	✓	✓	✓	✓	✓	✗	✗	✗	✗		
			H.4.5.	Golf Course	✓	✗	✓	✗	✗	✗	✓	✗	✗	✗	✗	✓	✓	✗	✗	✗	✗		
			H.4.6.	Equestrian Centre	✓	✗	✓	✗	✗	✗	✓	✗	✗	✗	✗	✓	✓	✗	✗	✗	✗		
C	Com-mercial	C.1. Office	C.1.1.	Office	✓	✗	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✗	✓	✓			
			C.1.2.	Co-working	✓	✗	✓	✗	✗	✓	✗	✓	✓	✓	✓	✗	✗	✗	✗	✗	✗		
	C.2. Retail	C.2.1.	On-street Retail: Convenience	✓	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
		C.2.2.	On-street Retail: Supermarket	✓	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
		C.2.3.	On-street Retail: Large format	✓	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
		C.2.4.	Superstore	✓	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
	C.3. Mall	C.3.1.	Shopping Centre without Superstore: Small	✓	✗	✓	✗	✗	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗		
		C.3.2.	Shopping Centre without Superstore: Mid-sized	✓	✗	✓	✗	✗	✓	✗	✓	✗	✓	✓	✓	✓	✓	✓	✗	✗	✗		
		C.3.3.	Major Shopping Centre	✓	✗	✓	✗	✗	✓	✗	✓	✗	✓	✓	✓	✓	✓	✓	✗	✗	✗		
		C.3.4.	Regional Mall	✓	✗	✓	✗	✗	✓	✗	✓	✗	✗	✗	✗	✓	✓	✓	✗	✗	✗		
F	Public Facility	F.1. Education Major Shopping Centre	F.1.1.	Children Nursery	✓	✗	✓	✗	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗		
			F.1.2.	Kindergarten	✓	✗	✓	✗	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗	
			F.1.3.	School	✓	✗	✓	✗	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗	
			F.1.4.	Technical Training Centre	✓	✗	✓	✗	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗
			F.1.5.	University and College	✓	✗	✓	✗	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗

C. Appendices

5. Land use code

Land Use and Zoning matrix (3/8)

✓ Allowed ✓ Conditionally allowed ✗ Not allowed

Land use classification

Zone (identified in the Structure plan)

L1	L2	L3	Comm- ercial	Conser- vation	Light Industry	Heavy Industry	Land bank	Mixed -use	Open space and recreation	Public services	Low- density residential	Med.- density residential	High- density residential	Rural	Tour- ism	Wilder- ness	Trans- portation	Utilities
F	Public Facility	F.2. Religious	F.2.1. Local Mosque	✓	✗	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✗	✓	✓
			F.2.2. Juma Mosque	✓	✗	✓	✗	✗	✓	✓	✓	✓	✓	✓	✓	✗	✓	✓
			F.2.3. Eid Prayer Area	✓	✗	✓	✗	✗	✓	✓	✓	✓	✓	✓	✓	✗	✓	✓
			F.2.4. Prayer Room	✓	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✗	✓	✓
			F.2.5. Religious Centre	✓	✗	✓	✗	✗	✓	✓	✓	✓	✓	✓	✓	✗	✓	✓
			F.2.6. Facility for Other Religions	✓	✗	✓	✗	✗	✓	✓	✓	✓	✓	✓	✓	✗	✓	✓
			F.2.7. Cemetery	✗	✗	✓	✗	✗	✗	✓	✗	✗	✗	✓	✗	✗	✓	✓
	F.3. Healthcare		F.3.1. Polyclinic	✓	✗	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗
			F.3.2. Healthcare Centre or Clinic	✓	✗	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗
			F.3.3. Hospital	✓	✗	✓	✗	✗	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗
			F.3.4. Specialty Hospital	✓	✗	✓	✗	✗	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗
			F.3.5. Rehabilitation Centre	✓	✗	✓	✗	✗	✓	✓	✓	✓	✓	✓	✗	✗	✗	✗
			F.3.6. Elderly Care Facility	✓	✗	✓	✗	✗	✓	✓	✓	✓	✓	✓	✗	✗	✗	✗
			F.3.7. Veterinary Hospital	✓	✗	✓	✗	✗	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗

C. Appendices

5. Land use code

Land Use and Zoning matrix (4/8)

✓ Allowed ✓ Conditionally allowed ✗ Not allowed

Land use classification

Zone (identified in the Structure plan)

L1					Comm- ercial	Conser- vation	Light Industry	Heavy Industry	Land bank	Mixed -use	Open space and recreation	Public services	Low- density residential	Med- density residential	High- density residential		Tour- ism	Wilderness	Trans- portation	Utilities			
F	Public Facility	F.4	Government Service	F.4.1.	Government Centre	✓	✗	✓	✗	✗	✓	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗		
				F.4.2.	Court	✓	✗	✓	✗	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗	
				F.4.3.	Post Office	✓	✗	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✗	✓	✗
				F.4.4.	Public Sanitation Facility	✓	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✗	✓	✓
		F.5.	Social and Cultural	F.5.1.	Gallery and Museum	✓	✗	✓	✗	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗
				F.5.2.	Performing Arts Centre	✓	✗	✓	✗	✗	✓	✓	✓	✗	✓	✓	✓	✗	✓	✗	✗	✗	✗
				F.5.3.	Library	✓	✗	✓	✗	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗
				F.5.4.	Community Centre and Multi-Purpose Hall	✓	✗	✓	✗	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗
		F.6.	Community Sport	F.6.1.	Sport Centre	✓	✗	✓	✗	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗
				F.6.2.	Sport Ground	✓	✓	✓	✗	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗
		F.7.	Safety, Security and Other Facilities	F.7.1.	Police Station	✓	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✗	✓	✓
				F.7.2.	Civil Defence	✓	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✗	✓	✓
				F.7.3.	Ambulance Station	✓	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✗	✓	✓
				F.7.4.	Penal and Correctional Institution	✗	✗	✓	✗	✗	✗	✗	✓	✗	✗	✗	✗	✓	✗	✗	✗	✗	✗
				F.7.5.	Military Facility	✗	✗	✓	✓	✗	✗	✗	✓	✗	✗	✗	✗	✓	✗	✗	✗	✓	✓
				F.7.6.	Coast Guard	✓	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
				F.7.7.	Petrol Station	✓	✗	✓	✓	✗	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✗	✓
I	Industrial	I.1.	Industrial Light	I.1.1.	Industrial Light	✓	✗	✓	✓	✗	✓	✗	✗	✗	✗	✗	✗	✗	✓	✓			
		I.2.	Industrial Medium	I.2.1.	Industrial Medium	✗	✗	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	✓		
		I.3.	Industrial Heavy	I.3.1.	Industrial Heavy	✗	✗	✗	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	✓		
		I.4.	Logistics	I.4.1.	Warehouse	✓	✗	✓	✓	✗	✓	✗	✓	✗	✗	✗	✗	✗	✗	✓	✓		

C. Appendices

5. Land use code

Land Use and Zoning matrix (5/8)

✓ Allowed ✓ Conditionally allowed ✗ Not allowed

Land use classification

Zone (identified in the Structure plan)

L1	L2	L3	Comm- ercial	Conser- vation	Light Industry	Heavy Industry	Land bank	Mixed -use	Open space and recreation	Public services	Low- density residential	Med.- density residential	High- density residential	Rural	Tour- ism	Wilder- ness	Trans- portation	Utilities
T	Transportation	T.1 Public Transit	T.1.1. Public Transit Terminal and Interchange	✓	✗	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✗	✓	✓
			T.1.2. Public Transit Vehicle Storage	✓	✗	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	✓
			T.1.3. Public Transit Way	✓	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✗	✓	✓
	T.2 Maritime	T.2.1 Seaport and Facility	T.2.1. Seaport and Facility	✓	✗	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	✓
			T.2.2. Sea Terminal and Interchange	✓	✗	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✗	✓	✓
			T.2.3. Waterway	✓	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✗	✓	✓
			T.2.4. Maritime Vehicle Storage and Parking	✗	✗	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	✓
	T.3 Aviation	T.3.1 Airport Terminal and Facility	T.3.1. Airport Terminal and Facility	✗	✗	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	✓
			T.3.2. Runway	✗	✗	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	✓
			T.3.3. Local Airport	✓	✗	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✗	✓	✓
	T.4 Rail	T.4.1 Rail Terminal and Interchange	T.4.1. Rail Terminal and Interchange	✓	✗	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✗	✓	✓
			T.4.2. Train Storage	✗	✗	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	✓
			T.4.3. Railway Corridor	✓	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✗	✓	✓
			T.4.4. Freight Rail Station and Facility	✗	✗	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	✓
	T.5 Right of Way	T.5.1 Major Road and Street	T.5.1. Major Road and Street	✓	✗	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
			T.5.2. Minor Road and Street	✓	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	T.6 Other Transportation	T.6.1 Car Park	T.6.1. Car Park	✓	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✗	✓	✓
			T.6.2. Truck Park	✓	✗	✗	✓	✗	✗	✓	✗	✗	✗	✗	✗	✗	✓	✓
			T.6.3. Reserved parcel	✓	✗	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✗	✓	✓

C. Appendices

5. Land use code

Land Use and Zoning matrix (6/8)

✓ Allowed ✓ Conditionally allowed ✗ Not allowed

Land use classification

Zone (identified in the Structure plan)

L1	L2		L3		Commercial	Conservation	Light Industry	Heavy Industry	Land bank	Mixed -use	Open space and recreation	Public services	Low-density residential	Med.-density residential	High-density residential	Rural	Tourism	Wilderness	Transportation	Utilities		
U	Utility	U.1.	Dry Utility	U.1.1.	Power Strategic	✗	✓	✗	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	
				U.1.2.	Power Transmission 132/400 KV	✓	✗	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
				U.1.3.	Power Transmission 11/132 KV	✓	✗	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
				U.1.4.	Power Transmission 11/33 KV	✓	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
				U.1.5.	Power Transmission 11 KV	✓	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
				U.1.6.	Power Distribution	✓	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
				U.1.7.	O&G Field/Storage	✗	✗	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓
				U.1.8.	O&G Transmission	✓	✗	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
				9.	O&G Distribution	✗	✗	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓
				10.	Telecommunication Facility	✓	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
				11.	Waste Disposal or Treatment Facility	✗	✗	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓
				12.	Solid Waste Transfer Station	✗	✗	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓
				U.1.13	District Cooling	✓	✗	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	U.2.	Wet Utility	1.	Potable Water Strategic	✗	✗	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	
			2.	Potable Water Transmission	✓	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
			3.	Potable Water Distribution	✓	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
			4.	Sewerage Disposal and Treatment	✗	✗	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	

C. Appendices

5. Land use code

Land Use and Zoning matrix (7/8)

✓ Allowed ✓ Conditionally allowed ✗ Not allowed

Land use classification

Zone (identified in the Structure plan)

L1	L2	L3	Comm- ercial	Conser- vation	Light Industry	Heavy Industry	Land bank	Mixed -use	Open space and recreation	Public services	Low- density residential	Med.- density residential	High- density residential	Rural	Tour- ism	Wilder- ness	Trans- portation	Utilities
U	Utility	U.2. Wet Utility	U.2.5. Sewerage Pumping	✓	✗	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
			U.2.6. Sewerage Transmission	✓	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
			U.2.7. Stormwater Facility	✓	✗	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓
			U.2.8. Stormwater Pond	✓	✓	✓	✓	✗	✓	✗	✗	✗	✗	✓	✗	✗	✓	✓
			U.2.9. Irrigation Facility	✓	✓	✓	✓	✗	✓	✗	✗	✗	✗	✓	✗	✗	✗	✓
A	Agriculture	U.3. Utility Corridor	U.3.1. Utility Corridor	✓	✓	✓	✓	✗	✓	✗	✗	✗	✗	✗	✗	✗	✓	✓
			A.1.1. Animal Farm	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	✓	✗	✗	✗
			A.1.2. Ezbah	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	✓	✗	✗	✗
			A.1.3. Stable	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	✗	✗	✗	✗
			A.1.4. Aquaculture	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	✗	✗	✗	✗
		A.2. Agriculture	A.2.1. Farm	✗	✗	✓	✗	✗	✗	✗	✗	✗	✗	✓	✗	✗	✗	✗
			A.2.2. Productive Farm	✗	✗	✓	✗	✗	✗	✗	✗	✗	✗	✓	✗	✗	✗	✗
			A.2.3. Plant Nursery	✗	✗	✓	✗	✗	✓	✓	✓	✓	✓	✓	✗	✗	✗	✗
O	Open Space	O.1. Park	O.1.1. Neighbourhood Park	✓	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✗	✓	✓
			O.1.2. Community Park	✓	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✗	✓	✓
			O.1.3. District Park	✓	✓	✓	✗	✗	✓	✓	✓	✓	✓	✗	✓	✗	✗	✗
			O.1.4. Sector Park	✓	✓	✓	✗	✗	✓	✓	✓	✓	✓	✗	✓	✗	✗	✗
			O.1.5. City Park	✓	✓	✓	✗	✗	✓	✓	✓	✓	✓	✗	✓	✓	✗	✗

C. Appendices

5. Land use code

Land Use and Zoning matrix (8/8)

✓ Allowed ✓ Conditionally allowed ✗ Not allowed

Land use classification

Zone (identified in the Structure plan)

L1	L2	L3	Comm- ercial	Conser- vation	Light Industry	Heavy Industry	Land bank	Mixed -use	Open space and recreation	Public services	Low- density residential	Med.- density residential	High- density residential	Rural	Tour- ism	Wilder- ness	Trans- portation	Utilities
O	Open Space	O.2. Beach and Waterbody	O.2.1. Beach	✓	✓	✓	✗	✗	✓	✓	✓	✓	✓	✓	✓	✓	✗	✗
			O.2.2. Private Beach	✓	✗	✓	✗	✗	✓	✗	✗	✗	✗	✓	✓	✗	✗	✗
			O.2.3. Water Body	✓	✓	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	O.3. Public Realm	O.3.1. Square	O.3.1. Square	✓	✗	✓	✓	✗	✓	✓	✓	✓	✓	✓	✓	✗	✓	✓
			O.3.2. Promenade	✓	✗	✓	✗	✗	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗
			O.3.3. Sikka	✓	✗	✓	✗	✗	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗
	O.4. Wilderness and Landscape	O.4.1. Wildemess	O.4.1. Wildemess	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	✗	✗
			O.4.2. Buffer Zone	✓	✓	✓	✓	✗	✓	✗	✗	✗	✗	✗	✗	✓	✓	✓
			O.4.3. Landscape	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
MX	Mixed Use	MX.1. Mixed Residential		✓	✗	✗	✗	✗	✓	✗	✗	✓	✓	✓	✓	✗	✗	✗
		MX.2. Mixed Hospitality		✓	✗	✗	✗	✗	✓	✗	✗	✓	✓	✓	✓	✗	✗	✗
		MX.3. Mixed Commercial		✓	✗	✓	✗	✗	✓	✗	✗	✓	✓	✓	✓	✗	✗	✗
		MX.4. Mixed Industrial		✗	✗	✓	✓	✗	✓	✗	✗	✓	✓	✓	✓	✗	✓	✗
		MX.5. Mixed Facility		✓	✗	✓	✗	✗	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗
		MX.6. Mixed Transportation		✗	✗	✓	✓	✗	✓	✗	✗	✓	✓	✓	✓	✗	✓	✗

C. Appendices

6. Urban planning standards

Calculation Rules to test different Dimensions of the Master Plan (1/2)

1. Project Area

- a. Project area = Total area of developable lands (Total area in site plan “for new projects” OR Total area of modified plots “for approved MP modifications”)

2. Gross Floor Area (GFA)

- a. $GFA = \text{Parcel area} \times FAR$ (Note Once the GFA is fixed, $FAR = GFA / \text{Parcel area}$)

1. Building Heights (Floors)

- a. Total floors (above ground) = Podium floors + Tower floors
- b. Development is acceptable if total floors comply with DCAA height limits

4. Building Envelope Test

- a. Envelope BUA = Parcel area $\times$ Maximum allowable footprint after setback $\times$ Total floors
- b. Condition: If $(GFA \times 1.25) < \text{Envelope BUA} \rightarrow$ development is considered workable

5. Unit Calculation

- a. Units = $(\text{Land use GFA} \times \text{Land use efficiency}) / \text{Average area of unit}$
- b. Land use efficiency = $(\text{Usable area of GFA} / \text{Total Area of GFA}) \%$

6. Population Density

- a. Density = Population / Project Area

C. Appendices

6. Urban planning standards

Calculation rules to test different dimensions of the master plan (2/2)

Suggested calculations approach. Please highlight if any alternative method is used.

7. Average Population Calculation

- From each Land use L3 units, Population = Number of units X Number of people per unit
- From each Land use L3 GFA per unit, Population = (Land use GFA X Land use efficiency)/Average Unit GFA for 1 person

8. Peak Population Calculation

- Peak Population= YY X Residents + YY X Workers + YY X Visitors

9. Public Facilities Calculation

- Number of facilities= Total Residential population / Number of people served by 1 facility. (Round down in case of fraction)
- Total area of Facility= Total Residential population X minimum per capita site area (per by facility type)

10. Parking Provision Test

- Parking required by standard must equal or less than provided parking within the parcel.
- Parking structure BUA + Tower BUA must be equal or less than the Building envelope.
- Total parking = Basement + Surface + Podium
 - Parking - Basement = (Parcel Area X Parcel efficiency after deduction for working space and foundation)/ 45 sqm X Number of basement floors
 - Parking – Surface = Area allocated for surface parking / 35 sqm
 - Parking - Podium = Podium floorplate/ 45 sqm X Number of podium floors

C. Appendices

6. Urban planning standards

Residential individual requirements for new master plans

1. All master plans must provide the following distribution for single family residential units:

- a. Nationals: 10%
- b. Expatriates: 90%
- c. Total Single-Family Units: 100%

Residential Occupancy Assumptions for Population Estimation

Residential Unit Type	Occupancy (Population Assumptions)
Villas / Townhouses	10% of units allocated to UAE Nationals – Average household size: 7.8 persons/unit
	90% of units allocated to Expatriates – <4 bedrooms: 4 persons/unit; +4 bedrooms: 6 persons/unit
Apartments	Studio: 1.5 persons/unit
	1-Bedroom: 2 persons/unit
	2-Bedroom: 3.5 persons/unit
	3-Bedroom: 5 persons/unit
	4-Bedroom and Above: 6 persons/unit

عدد السكان	تصنيف الوحدة السكنية
- 10% من الوحدات للمواطنين حجم الأسرة = 7.8 فرد - 90% من الوحدات للوافدين • حجم الأسرة للوحدات الأقل من 4 غرف نوم = 4 أفراد • حجم الأسرة للوحدات من 4 غرف نوم فأكثر = 6 أفراد	فلل سكنية / تاون هاوس
- ستوديو = 1.5 فرد - شقة غرفة نوم واحدة = 2 فرد - شقة غرفتين نوم = 3.5 فرد - شقة 3 غرف نوم = 5 أفراد - شقة 4 غرف نوم وأكثر = 6 أفراد	شقق سكنية

C. Appendices

6. Urban planning standards

Population Assumptions (Based on GFA averages per unit)

Low Density Project	Type	GFA	Unit average	HH Size	Population assumption	Total Population
	Detached Villa	% of Residential GFA	500 sqm	6	$(\%GFA / \text{Unit size}) * HH \text{ Size}$	XXX Person
	Attached Villa		250 sqm	4		

- Low-density** residential development projects that consist of detached villas, attached villas, or both, according to the project developer's vision. If there is no specific plan for the distribution of the number of residential units, Total population is calculated based on the average unit size mentioned in the previous table and according to the distribution ratio of the types of residential units.

Medium Density Project	Type	GFA	Unit average	HH Size	Population assumption	Total Population
	Villa (as per type)	% of Residential GFA	250 "Attached" / "Detached" 500 sqm	6	$(\%GFA / \text{Unit size}) * HH \text{ Size}$	XXX Person
	Apartment	% of Residential GFA	125 sqm	4		

- Medium-density** residential project, categorizing housing units into villas and apartments. Villas are further divided into (Detached / attached Villas) with an average unit size of 250 to 500 square meters. Apartments, on the other hand, have an average unit size of 125 square meters and a household size of 4.0 persons. The total population for the project is estimated using the formula above.

High Density Project	Type	GFA	Unit average	HH Size	Population assumption	Total Population
	Apartment	100% of Residential GFA	125 sqm	4	$(\%GFA / \text{Unit size}) * HH \text{ Size}$	XXX Person

- High-density** residential project, specifically focusing on apartments. In this scenario, 100% of the residential (GFA) is allocated to apartments, with an average unit size of 125 square meters. The assumed household size for these units is 4.0 persons per apartment, Total population for the project is estimated using the formula above.

- (10%) of residential GFA designated for villas is allocated for national, with HH size of 7.8 persons.
- The GFA per capita shall be no less than (32) square meters.

C. Appendices

6. Urban planning standards

Population Assumptions (Unit areas are based on GFA, unless otherwise specified.)

L1	L2	L3	Note: Dubai 20-minute city land uses <u>underlined</u>		Resident/ Guest	Workers	Visitors
R	Residential	R.1. Residential Individual	R.1.1. Detached Villa	National (10%)	7.8 pers./unit	2.0 pers./unit	
				Expatriate (90%)	6.0 pers./unit (>4 Beds)	1.0 pers./unit	
			R.1.2. Attached Villa / Townhouse	Expatriate (90%)	4.0 pers./unit (<4 Beds)	1.0 pers./unit	
				National (10%)	7.8 pers./unit	2.0 pers./unit	
				Expatriate (90%)	6.0 pers./unit (>4 Beds)	1.0 pers./unit	
				Expatriate (90%)	4.0 pers./unit (<4 Beds)	1.0 pers./unit	
		R.1.3. Palace		National	7.8 pers./unit	2.0 pers./unit	
				Expatriate	6.0 pers./unit	1.0 pers./unit	
		R.2. Residential Multi-Family	R.2.1. Villa Compound	Expatriate	6.0 pers./unit	1.0 pers./unit	
			R.2.2. Attached Villa Compound	Expatriate	6.0 pers./unit	1.0 pers./unit	
			R.2.3. Apartment	Studio	1.5 pers./unit		
				1 bed	2.0 pers./unit		
				2 bed	3.5 pers./unit	0.5 pers./unit	
				3 bed	5.0 pers./unit	1.0 pers./unit	
				>3 bed	6.0 pers./unit	2.0 pers./unit	
		R.3. Residential Collective	R.3.1. Staff Accommodation	Bedroom	3.0 sqm/person		
			R.3.2. Worker Accommodation	Bedroom	3.0 sqm/person		
H	Recreation and Hospitality	H.1. Resort	H.1.1. Resort		1.0 pers./ 60 sqm	1.0 pers. / 90 sqm	1.0 pers./ 80 sqm
		H.2. Hotel and Hotel Apartment	H.2.1. Hotel	Single	1.0 pers./unit	1.0 pers./unit	1.2 pers./unit
				Double	2.0 pers./unit	1.0 pers./unit	1.2 pers./unit
				Suite	2.5 pers./unit	1.0 pers./unit	1.2 pers./unit
			H.2.2. Hotel Apartment	Studio	1.5 pers./unit	0.2 pers./unit	1.2 pers./unit
				1 bed	2.5 pers./unit	0.2 pers./unit	1.2 pers./unit
				2 bed	3.5 pers./unit	0.2 pers./unit	1.2 pers./unit
				3 bed	5.0 pers./unit	0.2 pers./unit	1.2 pers./unit
		H.2.3. Serviced Villa		Urban	3.5 pers./unit	1.0 pers./ unit	
				Farmstay	8.0 pers./unit	1.0 pers./ unit	
		H.2.4. Student Accommodation					
		H.3. Event and Exhibition	H.3.1. Convention Center			1.0 pers./ 150 sqm	1.0 pers./ 20 sqm
			H.3.2. Outdoor Event Venue			1.0 pers./ 150 sqm	1.0 pers./ 15 sqm
		H.4. Recreation Facility	H.4.1. <u>Sport Venue</u>	-		1.0 pers./ 150 sqm	1.0 pers./ 15 sqm
			H.4.2. Amusement Park and Venue			1.5 pers./ha	200 pers./ha/day
			H.4.3. Zoo and Botanical Garden			1.5 pers./ha	200 pers./ha/day
			H.4.4. Private Club			1.0 pers./ 150 sqm	1.0 pers./ 100 sqm
			H.4.5. Golf Course			1.0 pers./ 150 sqm	1.0 pers./ 100 sqm
			H.4.6. Equestrian center			1.5 pers./ha	200 pers./ha/day

C. Appendices

6. Urban planning standards

Population Assumptions (Unit areas are based on GFA, unless otherwise specified.)

L1	L2	L3	Note: Dubai 20-minute city land uses <u>underlined</u>	Resident/ Guest	Workers	Visitors
C	Commercial	C.1. Office	C.1.1. <u>Office</u>		1.0 pers./ 20 sqm	1.0 pers/100 sqm
			C.1.2. <u>Co-working</u>		1.0 pers./ 25 sqm	1.0 pers/100 sqm
		C.2. Retail	C.2.1. <u>On-street Retail: Convenience</u>		1.0 pers./20 sqm	1.0 pers/5 sqm
			C.2.2. <u>On-street Retail: Supermarket</u>		0.8 pers./20 sqm	1.0 pers/5 sqm
			C.2.3. <u>On-street Retail: Large format</u>		0.8 pers./20 sqm	1.0 pers/5 sqm
			C.2.4. <u>Superstore</u>			
		C.3. Mall	C.3.1. <u>Shopping center without Superstore: Small</u>		0.8 pers./20 sqm	1.0 pers/5 sqm
			C.3.2. <u>Shopping center without Superstore: Mid-sized</u>		1.0 pers./20 sqm	1.0 pers/5 sqm
			C.3.3. <u>Major Shopping center</u>		1.0 pers./20 sqm	1.0 pers/5 sqm
			C.3.4. <u>Regional Mall</u>		0.5 pers./20 sqm	1.0 pers/5 sqm
F	Public Facility	F.1. Education	F.1.1. Early Learning Center		1.0 pers./ 10 child	1.0 child/ 25 sqm
			F.1.2. <u>Kindergarten</u>			
			F.1.3. <u>School</u>		1.0 pers./ 10 students	1.0 student/ 10 sqm
			F.1.4. <u>Technical Training center</u>			
			F.1.5. <u>University and College</u>		1.0 pers./ 15 students	1.0 student/ 15 sqm
		F.2. Religious	F.2.1. <u>Local Mosque</u>		3.0 pers./mosque	1.0 pers./ 2 sqm
			F.2.2. <u>Juma Mosque</u>		3.0 pers./mosque	1.0 pers./ 2 sqm
			F.2.3. Eid Prayer Area			1.0 pers./ 1 sqm land area
			F.2.4. Prayer Room			1.0 pers./ 1.8 sqm
			F.2.5. Religious Center		3.0 pers./ Center	1.0 pers./ 2 sqm
			F.2.6. Facility for Other Religions		3.0 pers./ Center	1.0 pers./ 2 sqm
			F.2.7. Cemetery		2.0 pers./ facility	10 pers./ facility

C. Appendices

6. Urban planning standards

Population Assumptions (Unit areas are based on GFA, unless otherwise specified.)

L1	L2	L3	Note: Dubai 20-minute city land uses <u>underlined</u>	Resident/ Guest	Workers	Visitors
F	Public Facility	F.3. Healthcare	F.3.1. <u>Polyclinic</u>		5.0 pers./ 160 sqm	1.0 pers./ 140 sqm
			F.3.2. <u>Healthcare center or Clinic</u>		5.0 pers./ 160 sqm	1.0 pers./ 140 sqm
			F.3.3. <u>Hospital</u>		6.0 pers./ 280 sqm	1.0 pers./ 140 sqm
			F.3.4. <u>Specialty Hospital</u>		1.0 pers./ 45 sqm	1.0 pers./ 140 sqm
			F.3.5. Rehabilitation center		1.0 pers./ 45 sqm	1.0 pers./ 140 sqm
			F.3.6. Elderly Care Facility	1.0 pers./ 45 sqm	1.0 pers./ 45 sqm	1.0 pers./ 140 sqm
			F.3.7. Veterinary Hospital			
		F.4. Government Service	F.4.1. <u>Government center</u>		1.0 pers./ 20 sqm	1.0 pers./ 100 sqm
			F.4.2. Court		1.0 pers./ 50 sqm	1.0 pers./ 25 sqm
			F.4.3. Post Office		1.0 pers./ 20 sqm	1.0 pers./ 20 sqm
			F.4.4. Public Sanitation Facility			
		F.5. Social and Cultural	F.5.1. <u>Gallery and Museum</u>		1.0 pers./ 50 sqm	1.0 pers./ 10 sqm
			F.5.2. <u>Performing Art center</u>		1.0 pers./ 40 sqm	1.0 pers./ 10 sqm
			F.5.3. <u>Library</u>		1.0 pers./ 50 sqm	1.0 pers./ 10 sqm
			F.5.4. Community center and Multi-Purpose Hall		1.0 pers./ 50 sqm	1.0 pers./ 5 sqm
		F.6. Community Sport	F.6.1. Sport center		1.0 pers./ 50 sqm*	1.0 pers./ 10 sqm
			F.6.2. Sport Court		1.0 pers./ 100 sqm*	1.0 pers./ 20 sqm
		F.7. Safety, Security and Other Facilities	F.7.1. <u>Police Station</u>		1.0 pers./ 20 sqm	1.0 pers./ 200 sqm
			F.7.2. <u>Civil Defense Center</u>		1.0 pers./ 20 sqm	
			F.7.3. <u>Ambulance Station</u>		1.0 pers./ 20 sqm	
			F.7.4. Penal and Correctional Institution	1.0 pers./ 25 sqm	1.0 pers./ 50 sqm	
			F.7.5. Military Facility		1.0 pers./ 50 sqm	
			F.7.6. Guard Facility		1.0 pers./ 100 sqm	
			F.7.7. Petrol Station		1.0 pers./ 20 sqm	

* Based on parcel area

C. Appendices

6. Urban planning standards

Population Assumptions (Unit areas are based on GFA, unless otherwise specified.)

L1	L2	L3	Note: Dubai 20-minute city land uses <u>underlined</u>	Resident/ Guest	Workers	Visitors
I	Industrial	I.1.	Industrial Light		200 pers./ ha*	
		I.2.	Industrial Medium		100 pers./ ha*	
		I.3.	Industrial Heavy		50 pers./ ha*	
		I.4.	Logistics		35 pers./ ha*	
U	Utility	U.1.	Dry Utility			
		U.1.1.	Power Strategic		1 pers. / 50 sqm*	
		U.1.2.	Power Transmission 132/400 KV		1 pers./ facility	
		U.1.3.	Power Transmission 11/132 KV		0.1 pers./ facility	
		U.1.4.	Power Transmission 11/33 KV		0.1 pers./ facility	
		U.1.5.	Power Transmission 11 KV		0.1 pers./ facility	
		U.1.6.	Power Distribution		0.1 pers./ facility	
		U.1.7.	O&G Field/Storage		1 pers. / 100 sqm*	
		U.1.8.	O&G Transmission		0.1 pers./ facility	
		U.1.9.	O&G Distribution		0.1 pers./ facility	
		U.1.10.	Telecommunication Facility		1 pers. / facility	
		U.1.11.	Waste Disposal or Treatment Facility		1 pers. / 50 sqm*	
		U.1.12.	Solid Waste Transfer Station		1 pers./ facility	
		U.1.13.	District Cooling		1 pers. / 50 sqm*	
		U.2.	Wet Utility			
		U.2.1.	Potable Water Strategic			
		U.2.2.	Potable Water Transmission			
		U.2.3.	Potable Water Distribution			
		U.2.4.	Sewerage Disposal and Treatment			
		U.2.5.	Sewerage Pumping Station		1 pers. / 100 sqm*	
		U.2.6.	Sewerage Transmission			
		U.2.7.	Stormwater Facility		1 pers./ facility	
		U.2.8.	Stormwater Pond		1 pers. / 100 sqm*	
		U.2.9.	Irrigation Facility			
		U.3.	Utility Corridor			
		U.3.1.	Utility Corridor			

* Based on parcel area

C. Appendices

6. Urban planning standards

Population assumptions (unit areas based on GFA unless otherwise mentioned)

L1	L2	L3	Note: Dubai 20-minute city land uses <u>underlined</u>	Resident/ Guest	Workers	Visitors
A	Agriculture	A.1. Animal and Livestock	A.1.1. Animal Farm		1.0 pers./ 50 sqm*	
			A.1.2. Ezbah		1.0 pers./ 50 sqm*	
			A.1.3. Stable		1.0 pers./ 50 sqm*	
			A.1.4. Aquaculture		1.0 pers./ 50 sqm*	10 pers./facility
		A.2. Agriculture	A.2.1. Farm		1.0 pers./ 50 sqm*	10 pers./facility
			A.2.2. Productive Farm		1.5 pers./ 50 sqm*	10 pers./facility
			A.2.3. Plant Nursery		1.0 pers./ 50 sqm*	10 pers./facility
O	Open Space	O.1. Park	<u>O.1.1. Neighborhood Park</u>		1 pers./ facility	150 pers./ha/day
			<u>O.1.2. Community Park</u>		2 pers./ facility	150 pers./ha/day
			<u>O.1.3. District Park</u>		3 pers./ facility	100 pers./ha/day
			<u>O.1.4. Sector Park</u>		5 pers./ facility	100 pers./ha/day
			<u>O.1.5. City Park</u>		10 pers./ facility	100 pers./ha/day
		O.2. Beach and Waterbody	O.2.1. Beach		1.0 pers./ 50 sqm*	250 pers./ha/day
			O.2.2. Private Beach		1.0 pers./ 50 sqm*	50 pers./ha/day

* Based on parcel area

C. Appendices

6. Urban planning standards

Public facilities Standards

الوحدة التنظيمية:	إدارة التخطيط الحضري وجودة الحياة - قسم المشاريع العمرانية	Organization Unit:
اسم النموذج:	قائمة المعايير التخطيطية للخدمات العامة	Form sheet title:
رقم النموذج:	DM-PD-F1-MF2	Doc Ref:

1- ملخص معايير الخدمات العامة للمناطق ذات الكثافة المنخفضة (> 70 فرد/هكتار):

مستوى الخدمة	نوع الخدمة	عدد السكان	أقل مساحة للموقع (م ²)	أقل مسافة من الموقع (م)	أقل نصيب للفرد من المساحة (م ²)	نطاق الخدمة (م)	الارتفاع	نسبة البناء
خدمات المجاورة السكنية	مسجد أوقاف	2000	1800	0.9	500	أرضي فقط	أرضي فقط	40%
	مكتبة عامة	2000	400	0.2	400	أرضي فقط	أرضي فقط	-
	مجمع صناديق بريد	2000	35	-	400	أرضي فقط	أرضي فقط	-
	ساحة عامة	2000	1500	0.75	400	أرضي فقط	أرضي فقط	-
	ساحة عامة	2000	1500	0.75	400	أرضي فقط	أرضي فقط	-
خدمات المنطقة السكنية	حديقة عامة	2000	4000	-	400	أرضي فقط	أرضي فقط	-
	مسجد جمعة	6000	4500	0.75	1000	أرضي - سطحي	أرضي - سطحي	40%
	مركز تجاري	6000	6000	1	800	أرضي - سطحي	أرضي - سطحي	50%
	مكتبة أطفال	6000	600	0.1	800	أرضي فقط	أرضي فقط	40%
	روضة أطفال	6000	3000	0.5	800	أرضي فقط	أرضي فقط	40%
خدمات الحي السكني	مكتبة عامة	6000	8000	1.3	800	أرضي - أوك	أرضي - أوك	40%
	مركز طبي خاص	6000	650	0.11	600	أرضي - أوك	أرضي - أوك	55%
	مكتبة عامة تخصصية	6000	650	0.11	600	أرضي - أوك	أرضي - أوك	55%
	مركز طبي خاص	6000	650	0.11	600	أرضي - أوك	أرضي - أوك	55%
	مكتبة عامة تخصصية	6000	650	0.11	600	أرضي - أوك	أرضي - أوك	55%
خدمات الحي السكني	مكتبة عامة	6000	3500	0.6	800	أرضي فقط	أرضي فقط	-
	حديقة منطقة	6000	12000	-	800	أرضي فقط	أرضي فقط	-
	مكتبة عامة	16000	9000	0.9	1500	أرضي - سطحي	أرضي - سطحي	40%
	مكتبة عامة	20000	12000	0.6	2500	أرضي - ثلاثة طوابق	أرضي - ثلاثة طوابق	40%
	مركز طبي خاص	15000	1200	0.08	600	أرضي - أوك	أرضي - أوك	55%
خدمات الحي السكني	مكتبة عامة	20000	3000	0.25	3000	أرضي - أوك	أرضي - أوك	50%
	مكتبة عامة	20000	1000	0.05	2500	أرضي فقط	أرضي فقط	30%
	مكتبة عامة	20000	2000	1	2500	أرضي فقط	أرضي فقط	-
	مكتبة عامة	20000	4000	0.08	4500	أرضي - أوك	أرضي - أوك	50%
	مكتبة عامة	20000	1400	0.09	5000	أرضي - أوك	أرضي - أوك	50%
خدمات القطاع	مكتبة عامة	20000	5000	0.07	3000	أرضي - أوك	أرضي - أوك	50%
	مكتبة عامة	20000	5000	0.07	3000	أرضي - أوك	أرضي - أوك	50%
	مكتبة عامة	20000	5000	0.07	3000	أرضي - أوك	أرضي - أوك	50%
	مكتبة عامة	20000	5000	0.07	3000	أرضي - أوك	أرضي - أوك	50%
	مكتبة عامة	20000	5000	0.07	3000	أرضي - أوك	أرضي - أوك	50%

* يمكن توفير هذه الخدمات ضمن البنية التحتية للمنطقة
** توفير هذه الخدمات خارج منطقة التخطيط
*** هذه الخدمات غير مطلوبة توفيرها ضمن مشاريع التخطيط
ملحوظ: هذه الخدمات مبنية على أساس متوسط الكثافة السكنية (70 فرد/هكتار) - جميع الخدمات مبنية على أساس متوسط الكثافة السكنية (70 فرد/هكتار) - جميع الخدمات مبنية على أساس متوسط الكثافة السكنية (70 فرد/هكتار)

تاريخ الإصدار: 2024/4/1

ملحوظ: هذه الخدمات مبنية على أساس متوسط الكثافة السكنية (70 فرد/هكتار) - جميع الخدمات مبنية على أساس متوسط الكثافة السكنية (70 فرد/هكتار) - جميع الخدمات مبنية على أساس متوسط الكثافة السكنية (70 فرد/هكتار)

2- ملخص معايير الخدمات العامة للمناطق ذات الكثافة المتوسطة (220-70 فرد/هكتار):

مستوى الخدمة	نوع الخدمة	عدد السكان	أقل مساحة للموقع (م ²)	أقل مسافة من الموقع (م)	أقل نصيب للفرد من المساحة (م ²)	نطاق الخدمة (م)	الارتفاع	نسبة البناء
خدمات المجاورة السكنية	مسجد أوقاف	3000	1300	0.5	500	أرضي - أوك	أرضي - أوك	50%
	مكتبة عامة	3000	500	0.16	350	أرضي - أوك	أرضي - أوك	-
	مجمع صناديق بريد	3000	35	-	350	أرضي فقط	أرضي فقط	-
	ساحة عامة	3000	1200	0.4	350	أرضي فقط	أرضي فقط	-
	ساحة عامة	3000	1200	0.4	350	أرضي فقط	أرضي فقط	-
خدمات المنطقة السكنية	حديقة عامة	3000	3000	1.2	350	أرضي فقط	أرضي فقط	-
	مسجد جمعة	9000	4000	0.45	1000	أرضي - أوك	أرضي - أوك	45%
	مركز تجاري	9000	5500	0.6	650	أرضي - أوك	أرضي - أوك	60%
	مكتبة أطفال	9000	700	0.08	650	أرضي فقط	أرضي فقط	40%
	روضة أطفال	9000	2700	0.3	650	أرضي فقط	أرضي فقط	40%
خدمات المنطقة السكنية	مكتبة عامة	9000	7500	0.8	650	أرضي - أوك	أرضي - أوك	40%
	مكتبة عامة تخصصية	9000	450	0.05	650	أرضي - أوك	أرضي - أوك	60%
	مكتبة عامة تخصصية	9000	450	0.05	650	أرضي - أوك	أرضي - أوك	60%
	مكتبة عامة تخصصية	9000	450	0.05	650	أرضي - أوك	أرضي - أوك	60%
	مكتبة عامة تخصصية	9000	450	0.05	650	أرضي - أوك	أرضي - أوك	60%
خدمات الحي السكني	مكتبة عامة	9000	3000	0.3	3000	أرضي فقط	أرضي فقط	-
	حديقة منطقة	9000	9000	1	650	أرضي فقط	أرضي فقط	-
	مكتبة عامة	15000	8500	0.55	1500	أرضي - سطحي	أرضي - سطحي	40%
	مكتبة عامة	15000	10000	0.4	2500	أرضي - ثلاثة طوابق	أرضي - ثلاثة طوابق	40%
	مركز طبي خاص	15000	800	0.04	600	أرضي - أوك	أرضي - أوك	60%
خدمات الحي السكني	مكتبة عامة	25000	1800	0.07	1400	أرضي - سطحي	أرضي - سطحي	60%
	مكتبة عامة	25000	6500	0.23	7500	أرضي - أوك	أرضي - أوك	65%
	مكتبة عامة	25000	750	0.025	2000	أرضي فقط	أرضي فقط	30%
	مكتبة عامة	25000	15000	0.6	2000	أرضي فقط	أرضي فقط	-
	مكتبة عامة	25000	3500	0.05	3000	أرضي - أوك	أرضي - أوك	60%
خدمات القطاع	مكتبة عامة	120000	100000	0.8	4000	أرضي - أوك	أرضي - أوك	60%
	مكتبة عامة	100000	4500	0.045	4500	أرضي - أوك	أرضي - أوك	60%
	مكتبة عامة	100000	2000	0.04	4500	أرضي - أوك	أرضي - أوك	60%
	مكتبة عامة	100000	1300	0.02	4000	أرضي - أوك	أرضي - أوك	60%
	مكتبة عامة	100000	4000	0.02	4000	أرضي - أوك	أرضي - أوك	60%

* يمكن توفير هذه الخدمات ضمن البنية التحتية للمنطقة
** توفير هذه الخدمات خارج منطقة التخطيط
*** هذه الخدمات غير مطلوبة توفيرها ضمن مشاريع التخطيط
ملحوظ: هذه الخدمات مبنية على أساس متوسط الكثافة السكنية (220 فرد/هكتار) - جميع الخدمات مبنية على أساس متوسط الكثافة السكنية (220 فرد/هكتار) - جميع الخدمات مبنية على أساس متوسط الكثافة السكنية (220 فرد/هكتار)

تاريخ الإصدار: 2024/4/1

ملحوظ: هذه الخدمات مبنية على أساس متوسط الكثافة السكنية (220 فرد/هكتار) - جميع الخدمات مبنية على أساس متوسط الكثافة السكنية (220 فرد/هكتار) - جميع الخدمات مبنية على أساس متوسط الكثافة السكنية (220 فرد/هكتار)

3- ملخص معايير الخدمات العامة للمناطق ذات الكثافة المرتفعة (< 220 فرد/هكتار):

مستوى الخدمة	نوع الخدمة	عدد السكان	أقل مساحة للموقع (م ²)	أقل مسافة من الموقع (م)	أقل نصيب للفرد من المساحة (م ²)	نطاق الخدمة (م)	الارتفاع	نسبة البناء
خدمات المجاورة السكنية	مسجد أوقاف	4000	1200	0.3	500	أرضي - أوك	أرضي - أوك	65%
	مكتبة عامة	4000	550	0.14	300	أرضي - أوك	أرضي - أوك	-
	مجمع صناديق بريد	4000	35	-	300	أرضي فقط	أرضي فقط	-
	ساحة عامة	4000	1000	0.25	300	أرضي فقط	أرضي فقط	-
	ساحة عامة	4000	1000	0.25	300	أرضي فقط	أرضي فقط	-
خدمات المنطقة السكنية	حديقة عامة	4000	3000	0.75	300	أرضي فقط	أرضي فقط	-
	مسجد جمعة	12000	2800	0.23	1000	أرضي - أوك	أرضي - أوك	65%
	مركز تجاري	12000	5400	0.45	500	أرضي - أوك	أرضي - أوك	65%
	مكتبة أطفال	12000	700	0.06	500	أرضي فقط	أرضي فقط	40%
	روضة أطفال	12000	3000	0.25	500	أرضي فقط	أرضي فقط	40%
خدمات المنطقة السكنية	مكتبة عامة	12000	7800	0.65	600	أرضي - أوك	أرضي - أوك	40%
	مكتبة عامة تخصصية	12000	500	0.04	500	أرضي - أوك	أرضي - أوك	65%
	مكتبة عامة تخصصية	12000	500	0.04	500	أرضي - أوك	أرضي - أوك	65%
	مكتبة عامة تخصصية	12000	500	0.04	500	أرضي - أوك	أرضي - أوك	65%
	مكتبة عامة تخصصية	12000	500	0.04	500	أرضي - أوك	أرضي - أوك	65%
خدمات الحي السكني	مكتبة عامة	12000	2500	0.2	500	أرضي فقط	أرضي فقط	-
	حديقة منطقة	12000	8500	0.7	600	أرضي فقط	أرضي فقط	-
	مكتبة عامة	20000	8500	0.42	600	أرضي - سطحي	أرضي - سطحي	40%
	مكتبة عامة	30000	10000	0.33	600	أرضي - ثلاثة طوابق	أرضي - ثلاثة طوابق	40%
	مركز طبي خاص	20000	900	0.04	600	أرضي - أوك	أرضي - أوك	65%
خدمات الحي السكني	مكتبة عامة	30000	1800	0.06	1000	أرضي - سطحي	أرضي - سطحي	65%
	مكتبة عامة	30000	6500	0.22	2000	أرضي - أوك	أرضي - أوك	65%
	مكتبة عامة	30000	1500	0.006	1500	أرضي فقط	أرضي فقط	30%
	مكتبة عامة	30000	12000	0.4	1500	أرضي فقط	أرضي فقط	-
	مكتبة عامة	30000	3500	0.035	3000	أرضي - أوك	أرضي - أوك	65%
خدمات القطاع	مكتبة عامة	120000	4000	0.03	3000	أرضي - أوك	أرضي - أوك	65%
	مكتبة عامة	100000	4000	0.035	3500	أرضي - أوك	أرضي - أوك	65%
	مكتبة عامة	100000	1000	0.01	2500	أرضي - أوك	أرضي - أوك	65%
	مكتبة عامة	250000	4000	0.015	4000	أرضي - أوك	أرضي - أوك	65%
	مكتبة عامة	35000	1800	0.05	600	أرضي - أوك	أرضي - أوك	65%

* يمكن توفير هذه الخدمات ضمن البنية التحتية للمنطقة
** توفير هذه الخدمات خارج منطقة التخطيط
*** هذه الخدمات غير مطلوبة توفيرها ضمن مشاريع التخطيط
ملحوظ: هذه الخدمات مبنية على أساس متوسط الكثافة السكنية (220 فرد/هكتار) - جميع الخدمات مبنية على أساس متوسط الكثافة السكنية (220 فرد/هكتار) - جميع الخدمات مبنية على أساس متوسط الكثافة السكنية (220 فرد/هكتار)

تاريخ الإصدار: 2024/4/1

ملحوظ: هذه الخدمات مبنية على أساس متوسط الكثافة السكنية (220 فرد/هكتار) - جميع الخدمات مبنية على أساس متوسط الكثافة السكنية (220 فرد/هكتار) - جميع الخدمات مبنية على أساس متوسط الكثافة السكنية (220 فرد/هكتار)

File: DM Public facilities standards.pdf

C. Appendices

6. Urban planning standards

Public facilities Standards

Updated Standards for Education Services

المعايير التخطيطية المُحدثة لتخصيص أراضي المدارس الحكومية

الارتفاع	المساحة 2م	نوع المدرسة
أرضي فقط للروضة والأول والثاني الابتدائي (أرضي+أول) للصف الثالث والرابع والخامس الابتدائي أرضي فقط لمواقف الحافلات و(أرضي+ طابق) لمواقف السيارات	14,000	مجمع تعليمي بنين وبنات* (روضة أطفال + ابتدائي)
أرضي + ثلاثة طوابق أرضي فقط لمواقف الحافلات و(أرضي+ طابق) لمواقف السيارات	20,000	مجمع تعليمي بنين وبنات* (إعدادية + ثانوية)
أرضي فقط للروضة والأول والثاني الابتدائي (أرضي+أول) للصف الثالث والرابع والخامس الابتدائي (أرضي+ثلاثة طوابق) للإعدادي والثانوي أرضي فقط لمواقف الحافلات و(أرضي+ طابق) لمواقف السيارات	35,000	مجمع تعليمي بنين وبنات جميع المراحل

* المناطق السكنية الصغيرة التي تحتاج إلى مدرسة واحدة فقط (مجمع تعليمي مرحلتين) طبقاً لعدد السكان والمعايير التخطيطية المعتمدة سيتم تحويل هذه المدرسة إلى مجمع تعليمي جميع المراحل (أرضي+ثلاثة طوابق) لتوفير احتياج السكان من الخدمة داخل المنطقة.

مصدر: DPRA 2025 / 2026

المعايير التخطيطية المُحدثة لتخصيص أراضي المدارس الخاصة (البدل 1)

الارتفاع	متوسط المساحة 2م	نوع المدرسة
أرضي فقط للروضة والأول والثاني الابتدائي (أرضي+أول) للصف الثالث والرابع والخامس الابتدائي (أرضي+ثلاثة طوابق) للإعدادي والثانوي أرضي فقط لمواقف الحافلات و(أرضي+ طابق) لمواقف السيارات	28,000	مدرسة خاصة كبيرة لجميع المراحل
	20,000	مدرسة متوسطة لجميع المراحل
	11,000	مدرسة صغيرة لجميع المراحل
أرضي فقط للروضة والأول والثاني الابتدائي (أرضي+أول) للصف الثالث والرابع والخامس الابتدائي (أرضي+ثلاثة طوابق) للإعدادي والثانوي أرضي فقط لمواقف الحافلات و(أرضي+ طابق) لمواقف السيارات	30,000	مدرسة خاصة لجميع المراحل + حضانات

مصدر: DPRA 2025 / 2026

المعايير التخطيطية المُحدثة لتخصيص أراضي المدارس الخاصة (البدل 2)

الارتفاع	متوسط المساحة 2م	نوع المدرسة
أرضي فقط للروضة والأول والثاني الابتدائي (أرضي+أول) للصف الثالث والرابع والخامس الابتدائي (أرضي+ خمسة طوابق) للمرحلة الإعدادي والثانوية أرضي فقط لمواقف الحافلات و(أرضي+ طابق) لمواقف السيارات	28,000	مدرسة خاصة كبيرة لجميع المراحل
	20,000	مدرسة متوسطة لجميع المراحل
	11,000	مدرسة صغيرة لجميع المراحل
أرضي فقط للروضة والأول والثاني الابتدائي (أرضي+أول) للصف الثالث والرابع والخامس الابتدائي (أرضي+ خمسة طوابق) للمرحلة الإعدادي والثانوية أرضي فقط لمواقف الحافلات و(أرضي+ طابق) لمواقف السيارات	30,000	مدرسة خاصة لجميع المراحل + حضانات

سيتم تطبيق البدل المقترح (2) بالمناطق ذات الكثافة السكانية المتوسطة والمرتفعة فقط حسب الارتفاع المسموح به للمباني بهذه المناطق.

مصدر: DPRA 2025 / 2026

Updated Standards for Religious Services

آلية تخفيض متطلبات المساجد في المشاريع التطويرية.

تم تخفيض متطلبات مساحات المساجد المطلوبة في المشاريع التطويرية من خلال تخفيض عدد مواقف السيارات المطلوبة والامتداد الرأسى بزيادة الارتفاع المسموح به للمساجد، ولكن بشكل لا يؤثر على عدد السكان المخدمين أو نطاق تأثير الخدمة أو عدد المصلين، وبما يتوافق مع كود دبي للمباني، ولأن هذه المساجد تخدم بالأساس سكان المشروع التطويري.

أولاً: فيما يخص عدد مواقف السيارات المطلوبة للمساجد:

نوع المسجد	المعيار الحالي	المعيار المُحدثة
		الكثافة السكانية المنخفضة والكثافة السكانية المرتفعة
مساجد الجمعة	1 موقف / 15مصري	1 موقف / 30مصري
مساجد الأوقات	1 موقف / 15مصري	1 موقف / 18مصري

* يسمح بتوفير 70% من عدد مواقف السيارات المطلوبة للمساجد في المشروع التطويري ضمن أرض المسجد ونسبة 30% المتبقية يسمح بتوفيرها ضمن مواقف سيارات مشتركة لأراضي الخدمات العامة بجوار للمسجد، بشرط ألا تزيد مسافة السير بين المواقف والمسجد عن 100متر.

مصدر: DPRA 2025 / 2026

آلية تخفيض متطلبات المساجد في المشاريع التطويرية

ثانياً: فيما يخص ارتفاعات المساجد:

نوع المسجد	المعيار الحالي	المعيار المُحدثة
مساجد الجمعة	أرضي+ أول	(أرضي+ طابقين) أو (سرداب + أرضي+ طابقين) *
مساجد الأوقات	أرضي فقط	أرضي+ أول

* يسمح باستغلال السرداب لمواقف المسجد فقط.

مصدر: DPRA 2025 / 2026

C. Appendices

7. Report, Drawing and Database Standards

Report Requirements

1. Presentation

- a. Report should be in the same order of the checklist.
- b. Provide a Table of contents with page numbers.
- c. Use simple clear language to convey the analysis or key features of the image, map, or table that is supplied.
We do not require general description of the same.
- d. All maps must be captioned, with legible annotations and the clear use of color showing:
 - i. Project area at the center of the frame
 - ii. Legend with all relevant items for the topic of the map marked including general requirements such as project/ site boundary, north point and qibla, and scale bar.
- e. All tables must be captioned, with clear titles for each row and column.

2. Clearly indicate any elements that should have been in the project but was not provided.

C. Formats

a. Portable Document Format (PDF) Version 8 or later format.

- i. A3 landscape preferred.
- ii. No password protection.

b. Filenames to match the following:

- i. Project Initials–Stage–Report or Drawing name–Revision
- ii. Example, for project title Marsa Dubai:
- iii. Report (single file) MD–Draft–Master plan report–Rev1.0
- iv. Drawings (separate) MD–Draft–Land use plan–Rev1.0

c. Submit two versions for the Report:

- i. Uncompressed
- ii. Compressed < 100mb

d. Submit one uncompressed file for the main drawings

- i. Land use
- ii. Phasing
- iii. etc

e. All tables should be provided in MS Excel format with the formula intact

C. Appendices

7. Report, drawing and database standards

Comprehensive Master Plan Drawing and Database in GIS

1. **All applications must provide spatial data (GIS), formatted based on DM specifications as set out below.**
 - a. Coordinate system: WGS 1984 Dubai Local Transverse Mercator (DLTM)
 - b. Data Units : Real coordinates in meters (m)
2. **The submitted GIS data will undergo a comprehensive review by DM and need to be thoroughly checked before submission. DM will reject any submission incompatible with the stated requirements and request that the file be resubmitted.**
3. **The spatial data submission must include all the requested master planning layers.**
4. **All parcels must have completed attributes with the proposed information.**
 - a. When there are multiple land uses/ unit types/ populations etc on the same parcel, all of these must be included in separate columns assigned to the same parcel with the appropriate details.
5. **No land use symbols are required in the spatial data submission.**
6. **Temporary parcel numbers must be assigned based on respective planning authority's parcel numbering system and will be subject to coordination with their respective officials.**
- G. Once the master plan is approved, the authority will coordinate with DM to obtain DM's permanent numbers to replace the temporary ones.
- H. The following parcel numbering system must be respected:
Project initials–District (or cluster)–Landuse 1 (or 2 if Public facilities, Open space, Utilities or Transport)–Parcel Number
Example, for project title Marsa Dubai, with the following land uses:

a. Villa	MD-Town_center-Residential-001
b. Mosque	MD-Gated_Community_01-Mosque-001
c. Neighborhood park	MD-Gated_Community_02-Park-001
d. Substation	MD-Entry_Avenue-DryUtility-001
e. Car park	MD-Gated_Community_02-Transport-001
- I. Provide all the special conditions that need to be considered when uploading the project on to the cadastral system, example
 - a. To be uploaded in full or in parts.
 - b. If any area, such as infrastructure or developer parcels are to be frozen.
 - c. If the site is divided into parcels, the boundary of each parcel to be indicated with a dotted line, and the land numbers are replaced by parcels numbers.
 - d. If only buildings are approved on the project land without any subdivision, the building footprints must be shown with a dotted line and the parcel numbers will be replaced with building numbers.

Comprehensive Master Plan Database in MS Excel

1. The comprehensive master plan database must also be submitted separately in MS Excel.
2. It must include detailed land use information as required in the provided templates.
3. All spatial areas must be audited with the information from the GIS
4. Must maintain all formulae and highlight cell that have bespoke calculations.

[illegible]

File: Parcel level data requirement_V2.1.xlsx (needs formatting)



Urban Planning Permits Guideline

© 2024

No content of this document shall be copied, printed, sold
or reproduced in any format in part or whole.